



RF287500



2 x cold accumulator
1 x ice cube tray

RA260000:
Heavy duty hinge support (RB 2x)

200 series
177.2 x 55.8 cm, soft close flat hinge
RF287500

Interior with precision-fitted, solid aluminium elements in Gaggenau Light Bronze
Safety glass shelves, set in solid aluminium profiles
Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface
Warm white interior lighting (3500 K) with integrated glare-free side lights
Direct access through open storage areas
Combines with fridge RC 289 (side-by-side integration)
Combines with wine climate cabinet RW 282 (side-by-side integration)
Cushioned door closing system allowing a soft and controlled door closure
Net volume 211 litres

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical features

Dynamic cold air distribution.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Freezing

No-frost technology with fast freezing.
Temperature adjustable from -24 °C to -14 °C.
4-star freezer compartment.
Freezing capacity 14 kg/24 h.
Storage time after a malfunction 22 h.
3 freezer drawers, 1 of which extra large, removable.
6 safety glass shelves, removable.
Net volume 211 litres.

Consumption data


4,5 Star (AU).
Energy consumption 195 kWh/year.
Noise level 35 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge left, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 22 kg.
For a side-by-side installation every appliance must be planned in its own niche.

Connection

Connecting cable 2.3 m with plug.

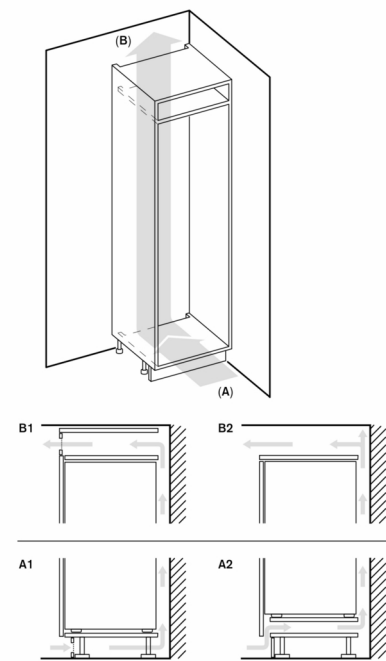

A: Air inlet $\geq 200\text{ cm}^2$; ventilation options A1 or A2
B: Air outlet $\geq 200\text{ cm}^2$; ventilation options B1 or B2

