



RHEEM COMPACT ELECTRIC

	45L	7 YEAR	Indoor/ Outdoor	
ELECTRIC	DELIVERY*	WARRANTY ¹	INSTALLATION ¹	DUAL HANDED



**MOST COMPACT
OVER-40L AVAILABLE**
668mm Height
393mm Diameter

FEATURES

- The Most Compact available in the over-40L capacity range
- Just 668mm HIGH (including anode cap)
- Smallest Diameter on the market – 393mm
- 45L Delivery*
- 7 Year Cylinder Warranty¹
- Designed for restricted space installations
- Dual Handed – easier to install
- Available in 2.4 and 3.6kW ratings plus a 2.4kW model with power cord
- Recessed Plug Fittings

WHY CHOOSE RHEEM

- Backed by over 70 years of Rheem water heating experience
- Capacities to suit every application and hot water requirement
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full technical support through Rheem's National Service Network





DESIGNED FOR EASY INSTALLATION†

Rheem COMPACT has been specifically designed for a fast and easy installation. Whilst suitable for indoor or outdoor installation†, its compact size means it is the unit of choice when replacing water heaters underneath the kitchen bench, in cupboards, or in the laundry. And with dual handed fittings and recessed plugs it can be rotated to fit into tight spaces.



RHEEM'S INSIDE STORY IS JUST AS STRONG

A ceramic lining is bonded to the inside of the cylinder providing long life protection against the varying water conditions found across Australia, backed by a 7 year cylinder warranty.

RHEEM IS TOUGH

The Rheem storage cylinder is made from specially formulated steel tough enough to withstand varying water and heating cycle pressures.

RHEEM® COMPACT SPECIFICATIONS			
	Warranty		Model
Rheem Single Element Dual Handed	7 Years ¹		191045 191045/P†
Hot Water Delivery	Litres		45*
Storage Capacity	Litres		49
Dimensions	A	mm	668
	B	mm	393
	C	mm	429
	D	mm	346
	E	mm	142
	F	mm	80
kW rating	2.4		✓
	3.6		✓
Approx. Weight Empty	kg	22	
Inlet/Outlet Connections	Rp	¾/20	
Relief Valve Setting	kPa	1400	
ECV Setting#	kPa	1200	
Max. Supply Pressure	kPa		
	With Expansion Control Valve		960
Without Expansion Control Valve		1120	

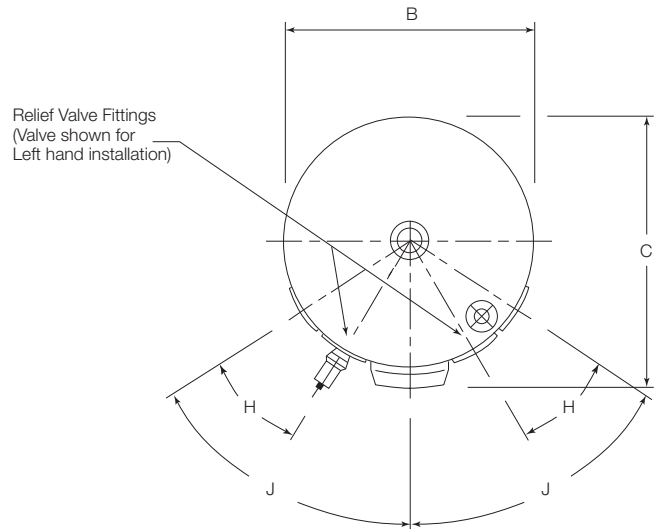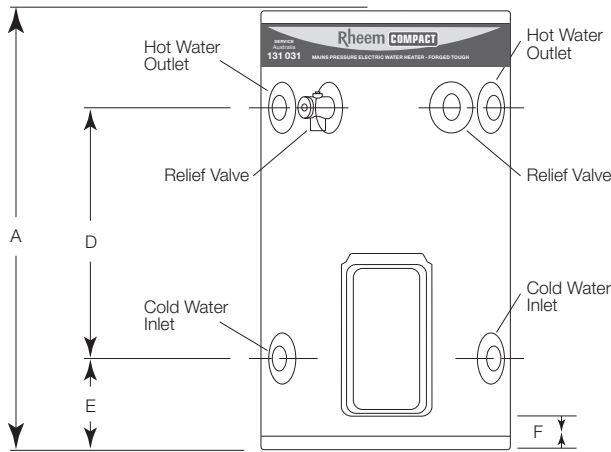

All water heaters operate on 240 volt single phase electricity supply.

ECV not supplied with water heater.

* Rated hot water delivery is 40L in accordance with AS/NZS4692.1. Actual delivery is 45Ls when tested to AS/NZS4692.1.

† Plug and lead model available in 2.4kW Rating only, this model is only suitable for indoor installations.

¹ Warranty: 7 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations.

Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty.



Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 6, Rydalmere, New South Wales 2116, Australia.

Version 3.0 (March 2014)

FLAME_RHEE692A_03/14

