



Color Variants

- CMP250111
Full glass door in Gaggenau Metallic
Width 60 cm
- CMP250101
Full glass door in Gaggenau Anthracite
Width 60 cm

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

CMP250111
Fully automatic espresso machine 200 series
Full glass door in Gaggenau Metallic
Width 60 cm
Controls at the top

Handless door / cushioned door closing system
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
Removable2.4litre water tank.
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

- Ristretto / 2 x Ristretto.
- Espresso / 2 x Espresso.
- Espresso Macchiato / 2 x Espresso Macchiato.
- Coffee / 2 x Coffee.
- Americano / 2 x Americano.
- Caffe Latte / 2 x Caffe Latte.
- Latte Macchiato / 2 x Latte Macchiato.
- Cappuccino / 2 x Cappuccino.
- Flat White / 2 x Flat White.
- Milk froth / 2 x Milk froth.
- Warm milk / 2 x Warm milk.
- Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
Rotary knob and TFT touch display operation.
Personalisation function, option to save 8 individualised beverages.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
3 coffee temperature levels.
10 hot water temperature levels.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with19 barpressure.
Double grinding and brewing cycles for extra intensity for single beverage order.
For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to0.5litres.
Integrated lighting with LEDs.
Removable bean container with aroma protecting lid for500 gallows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Electronic water filter exchange indicator.

Characteristics
Built-in / Free-standing
Built-in
Frothing nozzle
No
Display
No
Water protection system
No
Portion sizes
All cups
Dimensions
455 x 590 x 426
Dimensions of the packed product (HxWxD) (mm)
550 x 480 x 670
Required niche size for installation (HxWxD)
449 x 558 x 356
EAN code
4242006263850

Consumption and connection features
Electrical connection rating (W)
1600
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50/60
Plug type
Gardy plug w/ earthing

2020-12-20
Page 1

Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Cleaning


Fully automatic rinse program when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling program.
Emptying program to prepare the appliance for holiday or transportation.
Empty grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Dishwasher-safe coffee residue container and drip tray.
Dishwasher-safe beverage dispenser.

Planning notes


Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
Special accessories (order as spare parts):
Part No. 17000705 Water filter
Part No. 00311819 Descaling tablets
Part No. 00311769 Cleaning tablets
Part No. 00636455 Door hinge restrictor (92° opening angle)
Part No. 11015223 Bean container with lid

Connection

Total connected load1.6 KW.
Connection cable1.7 m, pluggable.

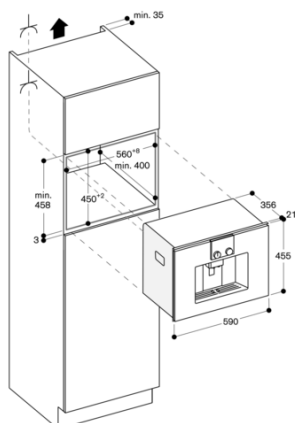

Left corner installation

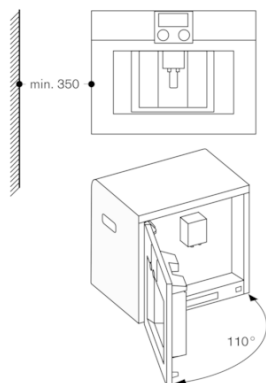

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.