


Virgo Hob Mixer

SUSSEX

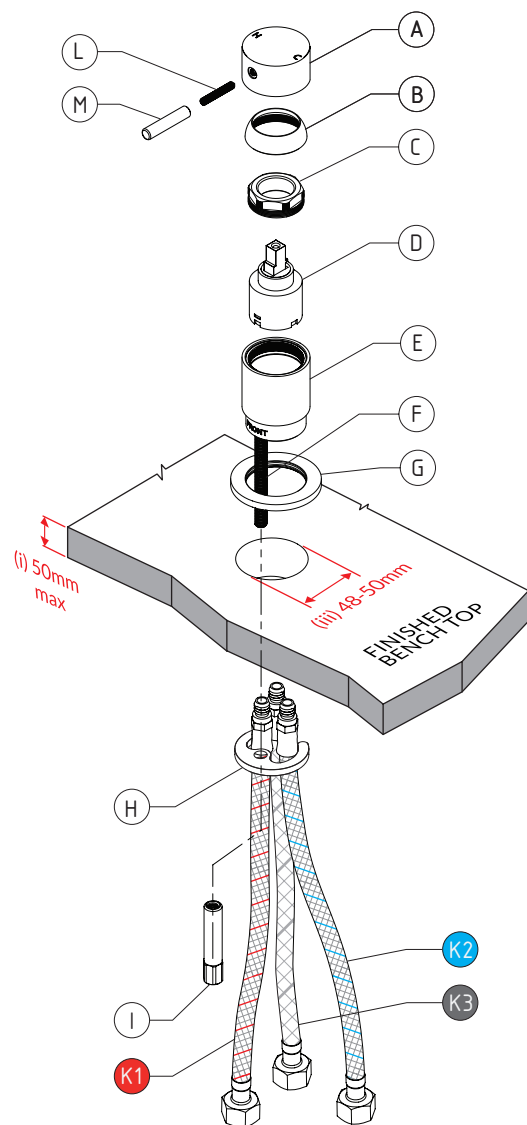

Product code

VGHM.01

Install Preparation:

- The Hob Mixer is supplied pre-assembled, the Clamp (I) and Fixing Nut (J) need to be temporarily removed prior to installation.
- Maximum bench thickness is **50mm (i)**.
- Hob Mixer Clearance Hole: **48 - 50mm (iii)**.
- Mounting Surface must be flat and level.

Product parts:

- (A) Handle Body
- (B) Dome
- (C) Cartridge Locknut
- (D) Cartridge
- (E) Mixer Body
- (F) Threaded Bar
- (G) Hob Mixer Flange
- (H) Hob Mixer Clamp
- (I) Fixing Nut
- (J) Flexible hoses with 1/2" BSP Fittings with Conical Seals (K1= HOT, K2 = COLD and K3 = MIXED)
- (K) Set Screw
- (L) Handle Pin

Plumbers note:

- Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2025
- Recommended working water pressure 300 - 500 kPa. Maximum water temperature is 65°C
- After installation, ensure that tapware functions correctly without leaks.
- Please ensure a copy of the Installation Instructions are left with the end user for future reference.




While we aim to ensure the specifications shown are correct at time of printing, Sussex Taps reserves the right to make modifications without prior notice. Always use the physical product for accurate measurements. Dimensions are subject to change without notice. All measurements are shown in millimetres. This product complies with lead free requirements.

Step 1

Remove Fixing Nut (I) and Clamp (H) then feed the preinstalled and labelled hoses (K1, K2 & K3) through the bench. Apply a small amount of Sealant to the under side of the Hob Mixer Flange (G) to seal the Mounting Surface. Note: The "FRONT" label must be positioned to face the user.

Working from underneath, fit the Clamp onto the Thread Bar (F) then tighten with Fixing Nut (I). (tighten well).

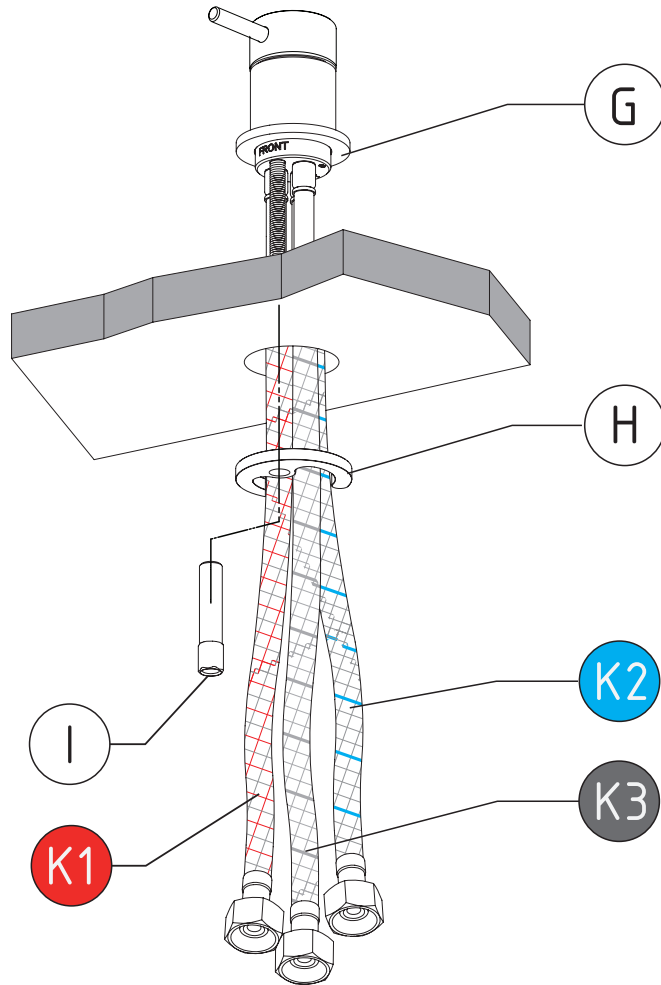

Step 2

Connect the Hot (E1) and Cold (E2) flexible hoses to 1/2" BSP pipework and tighten firmly with a spanner. Ensure hoses do not twist or kink during tightening. Sussex recommends using Stop Cocks/Mini Stops, however, these are not supplied.

