



Color Variants

CX482100
Frameless
Width 80 cm

Included accessories

1 x wireless temperature sensor for cooktop.

Optional accessories

CA060300
Cooking sensor for temperature regulation within pots
GN232110
Teppan Yaki plate made of multi ply material

CX482100
Full surface induction cooktop 400 series
Frameless
Width 80 cm

One single big cooking surface
Free positioning of cookware
All sizes and formats of cookware can be used
TFT touch display for an intuitive control of all functions
Cooking sensor function for temperature control in pots
Professional cooking functions
Frameless for flush mounting
Max. power output for big cookware of up to 5.5 KW

Cooking zones

Up to 5 items of cookware can be placed simultaneously on the cooktop. One unique cooking surface of 2750 cm².

Handling

Easy to use colour graphic TFT touch display with use indications.
Electronic power control in 17 output levels.

Features

Cooking sensor function.
Professional cooking function.
Dynamic cooking function.
Teppan Yaki function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Individual pot detection.
Cooking timer for each cooking position.
Stopwatch.
Short-term timer.
Information key with use indicators.
Power management.
Cooktop-based ventilation control (with suitable hood).

Safety

Main switch.
Residual heat indication.
Child lock.
Safety shut-off.
Pause function.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
Intermediate shelf is recommended. Appliance must be fixed from underneath.
Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.
Appliance weight: approx. 27 kg.

Connection


Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.

Characteristics
Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
5
Type of control setting devices
Required niche size for installation (HxWxD)
76 x 780-798 x 490-518
Width of the product (mm)
793
Dimensions of the product (mm)
76 x 793 x 513
Dimensions of the packed product (HxWxD) (mm)
152 x 951 x 636
Net weight (kg)
27.076
Gross weight (kg)
29.0
Residual heat indicator
Separate
Location of control panel
Hob front
Type of external control possibility
Basic surface material
Color of surface
anthracite
Color of frame
Approval certificates
AENOR, CE
Length electrical supply cord (cm)
150
EAN code
4242006268794


Consumption and connection features
Electrical connection rating (W)
7400
Gas connection rating (W)
Current (A)
Voltage (V)
220-240
Frequency (Hz)
60; 50
2019-03-03
Page 1

Power consumption standby/display off
0.5 W.
Power consumption standby/network
2.0 W.

Cross-section

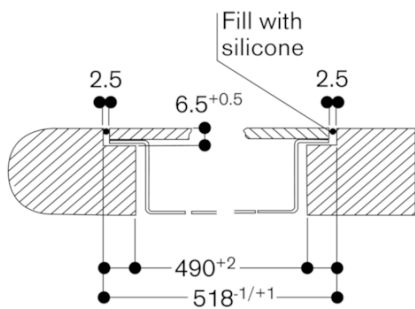

View from above



Longitudinal section

