

DV061100

#### Vacuumping drawer 400 series

60 x 14 cm

DV061100

- 99% vacuuming inside the chamber
- 3 vacuuming levels for vacuuming in the chamber, max. 99%
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%

– Integrable in 14 cm high niche

Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm

3 vacuuming levels for vacuuming in the chamber, max. 99%

3 vacuuming levels for vacuuming outside the chamber, max. 90%

Automatic connection recognition for vacuuming outside the chamber

Cushioned closing system

#### Application

Vacuumping for sous-vide cooking.

Vacuumping for fast marinating and flavouring.

Vacuumping for extended storage.

Vacuumping of vacuuming containers outside the chamber.

Vacuumping of liquids in bottles outside the chamber.

#### Handling

Touch key operation.

#### Features

Net volume 7 litres.

Capacity load max. 10 kg.

Maximum size of vacuuming bags W 240 mm x L 350 mm.

3 heat-sealing levels for different strengths of bag material.

Sealing bar, non-stick coating, removable.

Safety glass cover, opens automatically after vacuuming.

Raised vacuuming platform, 44 mm, deployable.

Utility space in vacuuming chamber, W 210 mm x L 275 mm.

Membrane for avoiding reflow of liquids during vacuuming outside the chamber.

Drying program for vacuuming pump.

Warning function.

#### Planning notes

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.

Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.

Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.

Front weight up to 3 kg.


Built-in under worktop or in single niche.

The socket can be planned behind the appliance.

#### Connection

Total connected load 0.32 KW.

Connection cable 1.5 m, detachable.

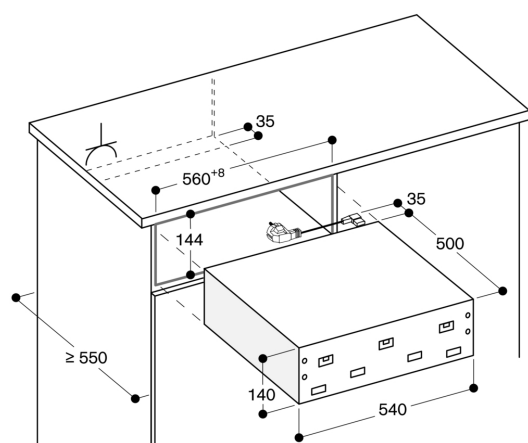

Socket

measurements in mm