


N 90
D96BMU5N0A
CHIMNEY HOOD, 90 CM



COOKING PASSION SINCE 1877



A⁺

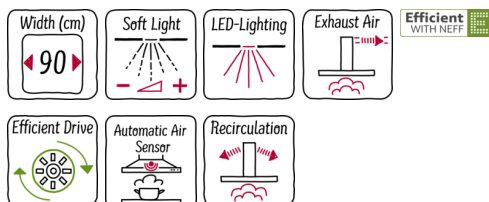

Flat design in a modern shape - our classic design hood 'box'.

- ✓ Automatic Air Sensor – automatically adjusts the extraction rate to match the situation in the kitchen
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED Lighting – a clear illumination whilst cooking thanks to the energy-saving LED lights

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : Australia Standards, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 19.663
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 430
 Boost position output recirculating (m³/h) : 385
 Maximum output recirculating air (m³/h) : 311
 Boost position air extraction (m³/h) : 843
 Number of lights : 3
 Noise level (dB) : 55
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004235965
 Connection Rating (W) : 165
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : AU plug
 Installation typology : Wall-mounted

Optional accessories

Z5102X1	Active carbon filter
Z5102X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z5276X0	CleanAir Recirculation Kit



4 242004 235965

N 90
D96BMU5N0A
CHIMNEY HOOD, 90 CM

Features

Design

- Appliance colour: Stainless steel
- Wall mounted design

Performance

- TouchControls
- 3-stage + 2 intensive
- Automatic run on for 10 min.
- Electronic saturation display for metal grease and active carbon filter
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 430 m³/h
Intensive 843 m³/h
- Noise min. / max. Normal Level: 42/55 dB
- LED lighting with dimmer function
- Light Intensity: 389 lux
- Colour Temperature: 3500 K
- EfficientDrive brushless motor

Technical Information

- Suitable for ducted or re-circulated extraction
- Appliance (ducted air): 628-954 x 898 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):
689 x 898 x 500 mm - mounting with outer chimney
809-1139 x 898 x 500 mm - mounting with telescopic chimney
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- 165 W total connected load
- Electrical cable length 1.3 m
- Voltage: 220 - 240 V

N 90
D96BMU5N0A
CHIMNEY HOOD, 90 CM

Dimensioned drawings

