



#### Color Variants

AF210161  
Stainless steel handle bar  
Width 60 cm

#### Optional accessories

AA210110  
1 activated charcoal filter with high efficient odour reduction due to increased surface. For air recirculation module AA 211 812.  
AA211812  
Patented air recirculation module including 1 activated charcoal filter with high efficient odour reduction due to increased surface

#### Installation Accessories

AA210460  
Lowering frame for 60 cm flat kitchen hood

AF210161  
Flat kitchen hood 200 series  
Stainless steel handle bar  
Width 60 cm  
Air extraction / Air recirculation

Unobtrusive flat kitchen hood design thanks to integrated glass panel in the steam screen  
Especially quiet operation thanks to integrated sound insulation  
Steam screen extends by touching the handle bar  
Especially high air output  
Energy-saving, low-noise fan  
Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours  
Dimmable, neutral white LED light for ideal illumination of the whole cooktop  
The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet  
Air extraction or air recirculation system  
Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals

#### Output

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Sound pressure level according to EN 60704-2-13.  
Odour reduction for air recirculation in accordance with EN 61591.  
Air extraction:  
510 / 920 m<sup>3</sup>/h.  
56 / 70 dB (A) re 1 pW.  
42 / 56 dB (A) re 20 µPa.  
Air recirculation:  
500 / 900 m<sup>3</sup>/h.  
62 / 69 dB (A) re 1 pW.  
48 / 55 dB (A) re 20 µPa.  
Odour reduction air recirculation 91%.

#### Features

Controls at front.  
3 electronically controlled power levels and 1 intensive mode.  
Automatic function with sensor-controlled run-on function.  
Grease filter saturation indicator.  
Stainless steel grease filter, dishwasher-safe.  
Neutral white LED light (3500 K), continuously dimmable.  
Lamp output 2 x 3 W.  
Illuminance 683 lx.  
Light can be switched on separately.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Integrated sound insulation for quiet operation.  
The fan is activated when the steam screen is extended.  
Patented technology for extension of the steam screen.  
Extendable steam screen 198 mm.  
Airflow-optimised interior for efficient air circulation and ease of cleaning.  
Patented easy mounting system for simple installation.  
The package includes an one-way flap.

#### Consumption data

Energy consumption 39.4 kwh/year.  
Sound level min. 40 dB / max. 56 dB normal mode.

#### Planning notes

Characteristics
Product name/family
Color chimney
Typology
Pull-out
Approval certificates
Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
175
Required niche size for installation (HxWxD)
349mm x 524mm x 290mm
Height of the chimney (mm)
Height of product, without chimney (mm)
Minimum distance above an electric hob
430
Minimum distance above a gas hob
650
Net weight (kg)
14.018
Type of control
Electronic
Number of speed settings
Maximum output air extraction (m3/h)
510
Boost position output recirculating (m3/h)
900
Maximum output recirculating air (m3/h)
500
Boost position air extraction (m³/h)
920
Number of lights
2
Noise level (dB)
56
Diameter of air outlet (mm)
120 / 150
Grease filter material
Washable stainless steel
EAN code
4242006267247

#### Consumption and connection features

##### Connection Rating (W)

266

##### Current (A)

10

##### Voltage (V)

220-240

##### Frequency (Hz)

60; 50

##### Plug type

CH plug w/ earthing, Gardy plug w/ earthing, GB plug

##### Installation typology

Built-in

2018-10-23

Page 1

Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the activated charcoal filter.

The door of the upper cabinet must be fully open in order to change the activated charcoal filter.

To be installed in an upper cabinet without base.

The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm.

The required cavity height of the upper cabinet together with the lowering frame measures 600 mm.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 43 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


#### Connection

Total connected load 266 W.

Connecting cable 1.8 m, pluggable.


# GAGGENAU

View of upper cabinet from above with AA 211 812

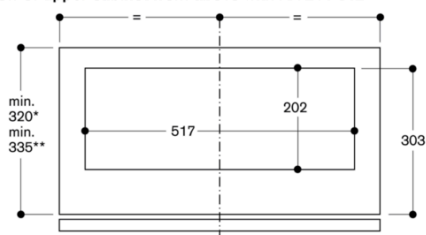




\* Appliance only  
\*\* Appliance with AA 210 490/460 lowering frame

Upper cabinet for AF 210

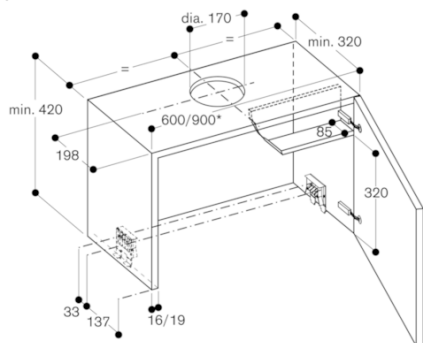


\* for upper cabinets measuring 90 cm, the AA 210 491 installation set is required in addition

Upper cabinet for AF 210  
with AA 210 460/AA 210 490 lowering frame

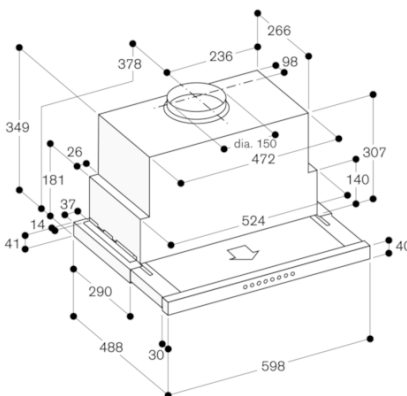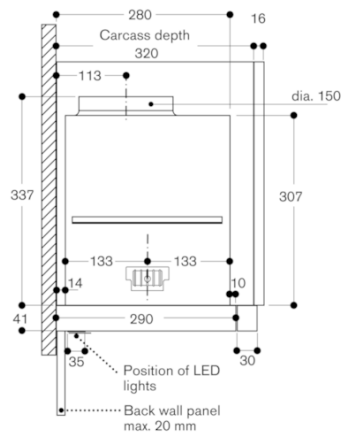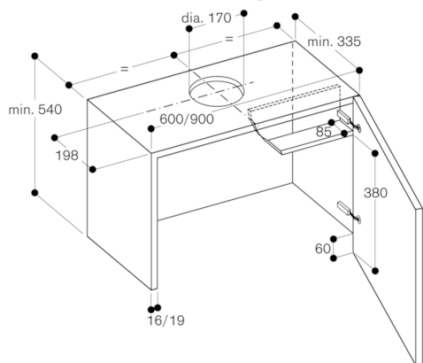

Cross-section of upper cabinet with AA 211 812 and  
AA 210 490/460 lowering frame

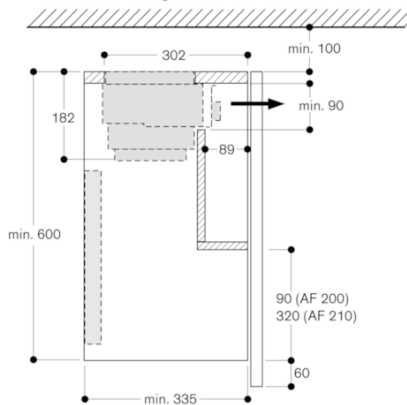

Cross-section of upper cabinet with AA 211 812

