



CX480100
Full surface induction cooktop 400 series
Frameless
Width 80 cm

One single big cooking surface
Free positioning of cookware
All sizes and formats of cookware can be used
TFT touch display for an intuitive control of all functions
Max. power output for big cookware of up to 4.4 kW
Frameless for flush mounting

Cooking zones
One unique cooking surface of 2800 cm².
Up to 4 items of cookware can be placed simultaneously on the cooktop.

Handling
Easy to use colour graphic TFT touch display with use indications.
Electronic power control in 17 output levels.



Features
Booster function.
Individual pot detection.
Cooking timer for each cooking position.
Timer.
Information key with use indicators.
Power management.

Safety
Main switch.
Residual heat indicator.
Child lock.
Safety shut-off.
Display cleaning protection.


Planning notes
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
Immersion depth 64.6 mm.
Intermediate shelf is recommended.
Appliance must be fixed from underneath.
Cooktop clamping range: 30 - 50 mm.
Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.
Appliance weight: approx. 26 kg.

Connection
Total connected load 7.2 kW.
Connecting cable 1.5 m without plug.

Characteristics
Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
4
Type of control setting devices
Touchscreen
Required niche size for installation (HxWxD)
64.6 x 780-798 x 490-518
Width of the product (mm)
793
Dimensions of the product (mm)
64.6 x 793 x 513
Net weight (kg)
26.0
Gross weight (kg)
28.0
Residual heat indicator
Separate
Location of control panel
Hob front
Type of external control possibility
Basic surface material
Ceramic
Color of surface
anthracite
Color of frame
Approval certificates
AENOR, CE
Length electrical supply cord (cm)
150
Knob Material
Sealed Burners
No
heating with booster
All
Type of pan support
Natural Gas Connection Rating (BTU)
LP Gas Connection Rating (BTU)
Dimension of 1st heating element (in)
Power of 1st heating element (kW)
Power of 1st burner (BTU)
Dimension of 2nd heating element (in)
Power of 2nd heating element (kW)
Power of 2nd burner (BTU)
Dimension of 3rd heating element (in)
Power of 3rd heating element (kW)
7.2
Power of 3rd burner (BTU)
Dimension of 4th heating element (in)
Power of 4th heating element (kW)
Power of 4th burner (BTU)
Dimension of 5th heating element (in)
Power of 5th heating element (kW)
Power of 5th burner (BTU)
Dimension of 6th heating element (in)
Power of 1st heating element (kW in boost)
Power of 2nd heating element (kW in boost)
Power of 3rd heating element (kW in boost)
Power of 4th heating element (kW in boost)
Power of 5th heating element (kW in boost)
Power of 6th heating element (kW in boost)
Consumption and connection features
Electrical connection rating (W)
7200
Gas connection rating (W)
Current (A)
Voltage (V)
220-240
Frequency (Hz)
60; 50
Universal Product Code
825225915232
Main colour of product
anthracite
Energy input
Electric

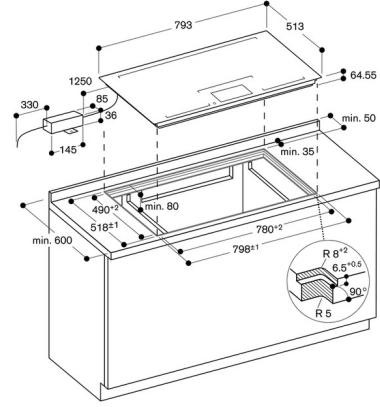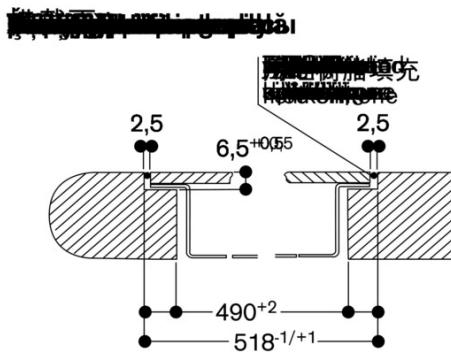

View from above

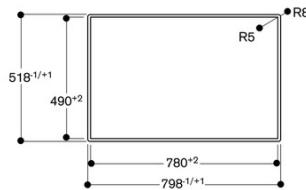

Longitudinal section

