

Billi Home BCS with Multifunction Mixer Tap

The Home BCS is the latest iteration of multifunction filtered drinking water appliances from Billi. The intersection of genuine innovation and sustainable design, The Home BCS integrates Billi's renowned water-cooling and energy reclaim technologies into a single space-saving under bench control module. Billi's Home BCS is the ultimate inclusion to the modern home.

The Good Design Award winning integrated Multifunction Mixer Tap provides a sleek solution to dispensing filtered water with a touch sensitive interface, alongside domestic mains supplied by operating a standard flick mixer.



Features						Product Specifications	
						Water Type	BCS
AUSTRALIAN DESIGNED & MADE	WATER COOLED TECHNOLOGY	HEAT EXCHANGE TECHNOLOGY	VENT-FREE INSTALLATION	ENERGY EFFICIENT	FRESHER SPARKLING TASTE	Dispenser	G - Multifunction Mixer Tap
Multifunction Mixer Tap	Home BCS Under-Bench Units					Mixer Tapware	N/A
						Product Code	925101G
						Warranty	3 years manufacturers warranty
						Under-Bench Dimensions	395mm(W) x 355mm (H) x 495mm (D)
						Min / Max Dispenser Temp	6°C / 99°C
						Power Plug	10 amp
						Power Rating	1500W, 220-240V, 50-60Hz
						Water Pressure	Min. 250kPa
						Ecolabel	N/A
						EPD	N/A
						Greenstar Contribution	N/A
						Watermark License	WM-021525 (unit), WM-021914 (tap)
						Lead Free	✓
						Section J7.7 (NCC)	✓
						WELS	5 Star - T42988
						WELL	Cornerstone Membership
						Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
						Food Handling	N/A
						Filtration	994052 - 0.2 Micron supplied standard

Add the relevant Finish Code to the Product code to complete your specification eg 925100GCH-LF

Standard Finishes



CH -
Chrome



BR -
Brushed



MB -
Matte Black



MW -
Matte White

Special Order Finishes



UB -
Urban Brass



GM -
Gun Metal Grey

Accessories

990726 - Tubing extension kit for Sparkling unit - 2mtrs


Scan the QR code access
our Revit families on

bimstore



Technical Drawings

DISPENSER

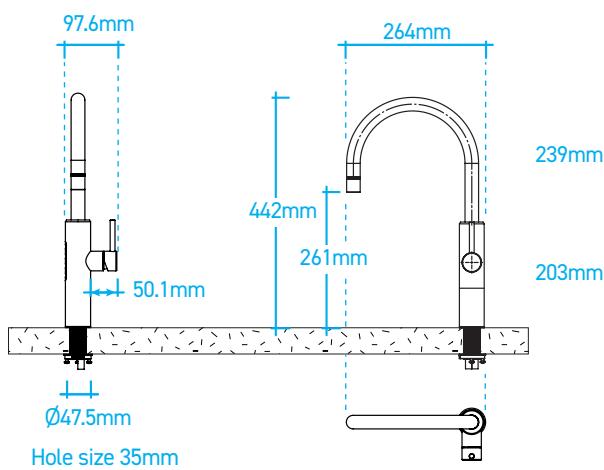

UNDER-BENCH UNITS


Billi Home BCS Unit



CO₂ Cylinder



Installation Requirements



Tubing removed for clarity

800mm maximum tube length

100mm minimum clearance



Power Outlet
Stop Taps (Installed by Plumber)
Max 600mm from Unit

Cupboard Dimensions:
520mm Minimum Width
550mm Minimum Depth



355mm

Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.



994052 - (0.2 micron)

Supplied standard.
Residential or Critical Care sites.



994051 - (5.0 micron)

Commercial & high volume sites.

*Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.

Installation Notes

Electrical

A standard 10 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

Water

Domestic Cold and Hot mains supply is required via separate 1/2" BSP (15mm) stop-taps with male threads. These should be pre-installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

Pressure Valve

Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.

CO₂ MSDS

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912.

Stone Benches

Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.

Ventilation

No joinery ventilation or accessories are required for this Billi product (water cooled technology and/or no waste heat).



Please scan the QR code for all support information.

Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd

P 0800 636 0 636
W www.billi.co.nz

Billi