

Version	Evo - Wall - 35 cm - Black - 800 m3/h
Design	Falmec Lab
Collection	Design

TECHNICAL FEATURES

Materials/Finishes	Painted black steel
Control	Electronic control
Function	Extracting/Filtering
Lighting	Dimmable lighting Dynamic Light (2700K - 5600K) LED 3x1,2 W - 2700 K / 5600 K
Filters	Metallic grease filter, removable and washable Charcoal filter (optional)
Dimensions	35 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	60 cm



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	280 W
Voltage/Frequency	220-240V 50-60Hz
Plug	Type I (Australia/New Zealand)

MOTOR

Motor	800 m ³ /h
Maximum capacity	765 m ³ /h I.E.C.61591
Maximum sound level	65 dB (A)re1pW I.E.C. 60704-2-13

WEIGHTS AND VOLUMES

Gross weight	21 kg
Net weight	16.4 kg
Volume	0.3 m ³
Packaging dimensions	L 995 x H 502 x P 595 mm




Optional accessories


Code	Description
103050091	Round charcoal filter Ø170 mm - Type 6

ENGINE SPECIFICATIONS

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	48	55	65	69
Capacity	354	503	655	765
Maximum pressure (Pa)	415	460	480	500
Motor power (W)	130	150	178	224
Air outlet	150	150	150	150

FLOW RATE / PRESSURE

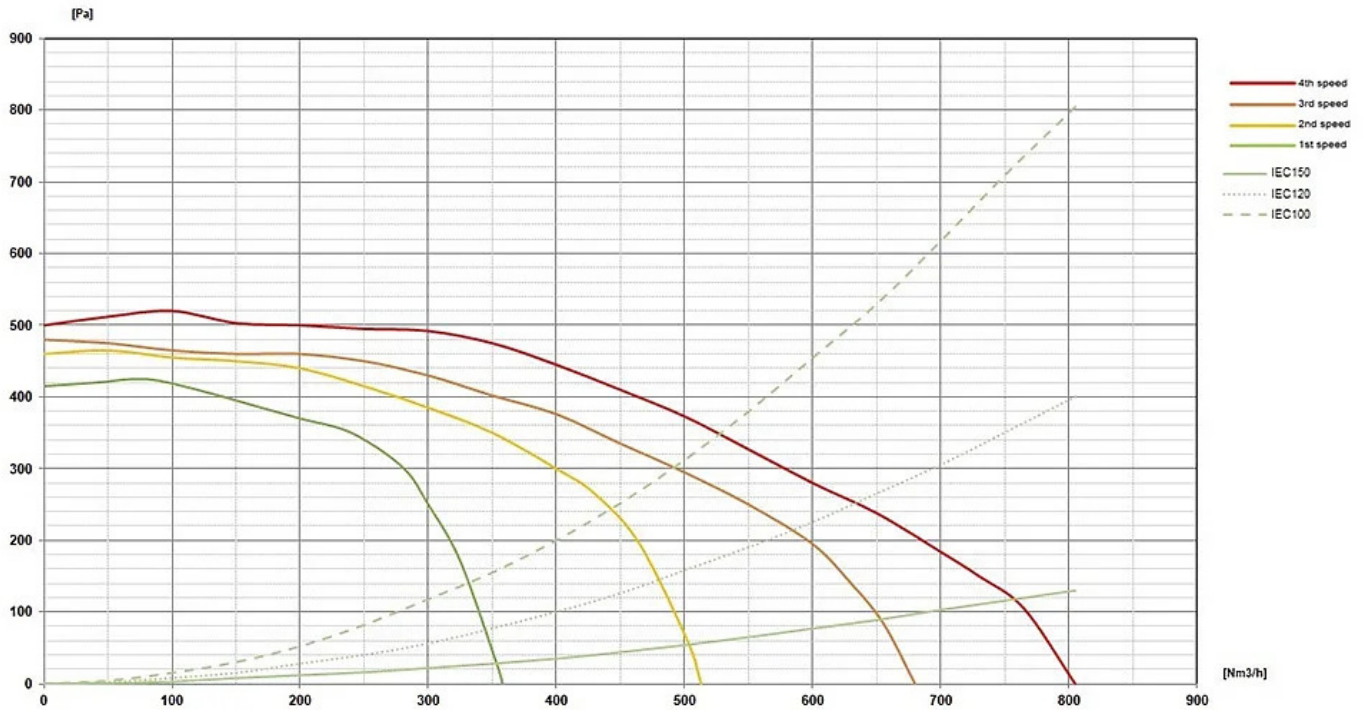

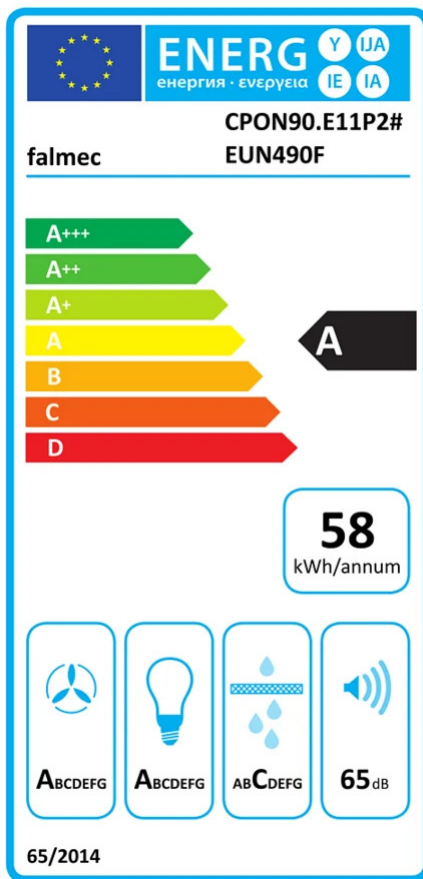

PF		
S	Falmec Lab	
M	Evo - Wall - 35 cm - Black - 800 m3/h	
AEC	57.60	kWh/a
EEC	A	
FDE	31.60	
FDEC	A	
LE	29.90	
LEC	A	
GFE	76	
GFEC	C	
Qmin	354	m ³ /h
Qmax	655	m ³ /h
Qboost	765	m ³ /h
SPEmin	48	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO		
PS	0.28	W
PI		
F	0.90	
EEI	53.50	
Qbep	449	m ³ /h
Pbep	411	Pa
Qboost	765	m ³ /h
Wbep	162	W
WL	6.00	W
Emiddle	179	lux
Lwa-SPEmax	65	dBa