










Installation Guide

Ideal ThinTop™

Workstations®, Work&WashStations™,
Workstations/WashStations™ with DryDock®,
BarStations® and WashStations™

ThinTop™ Workstations

Right Hand Drain Orientation

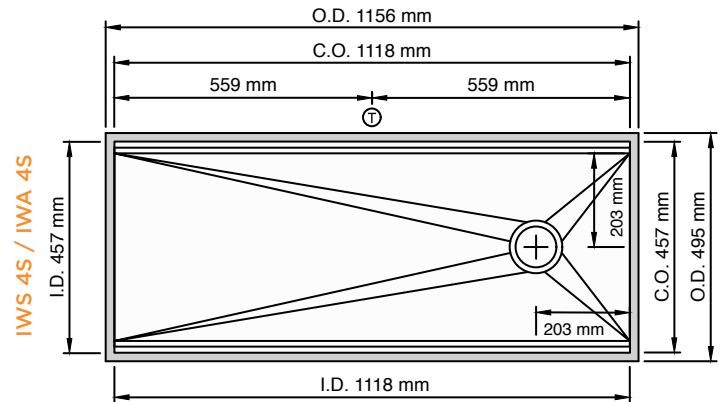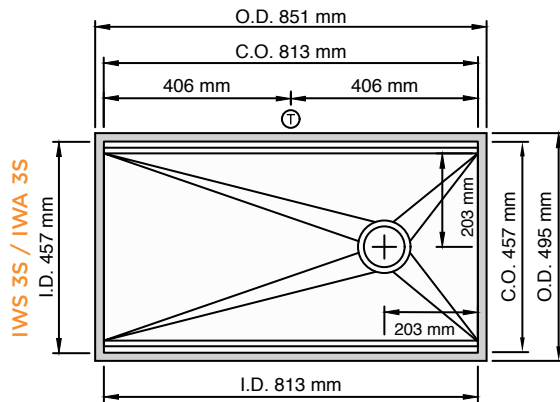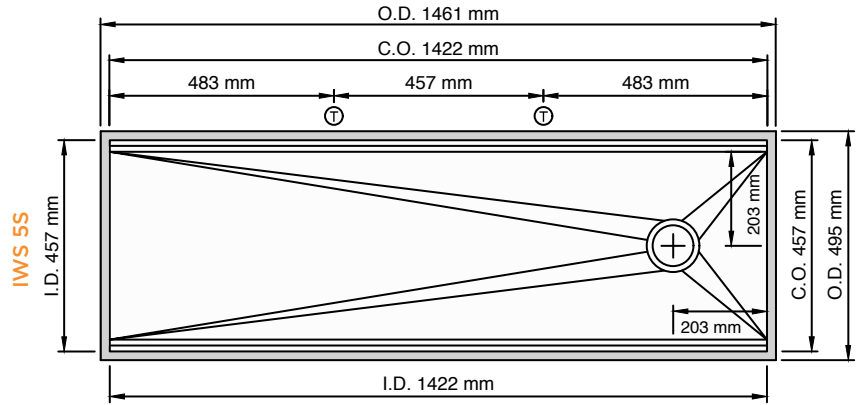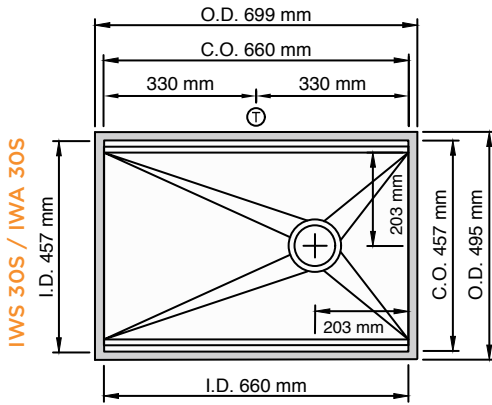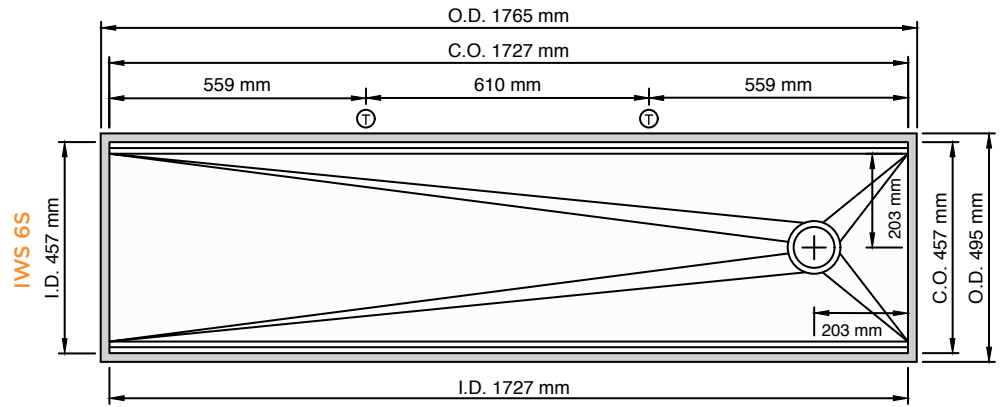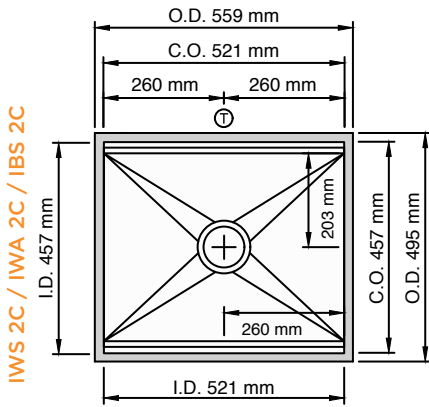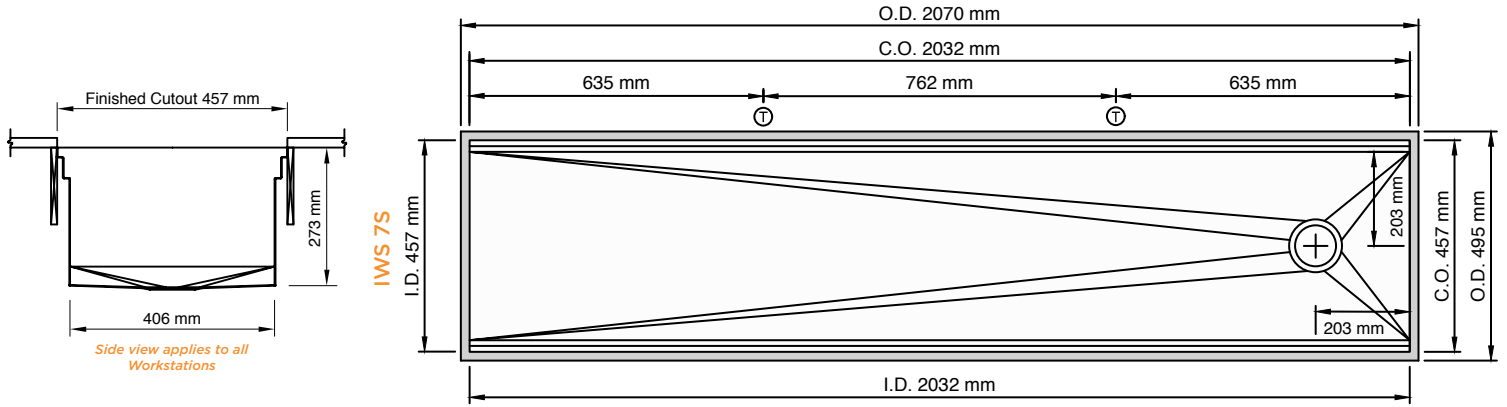


SUGGESTED GALLEY TAP PLACEMENT GUIDE
 Suggested maximum inside corner radius of countertop cutout 9.5 mm
 ① Galley Tap 35 mm minimum to 38 mm maximum hole diameter
 Center Tap hole diameters 51 mm behind cutout
Note: Tap Placements are for right hand or left hand drain orientation


Call 800.375.4255 or email customercare@thegalley.com
 for additional guidance on Tap and Tap Accessory placements

ThinTop™ Workstations


Left Hand Drain Orientation




IWS 7S

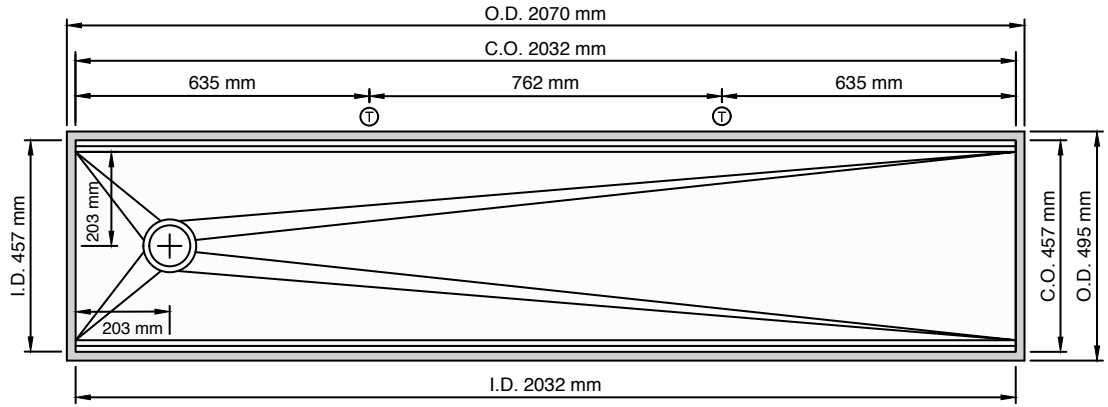


IWS 2C / IWA 2C / IBS 2C

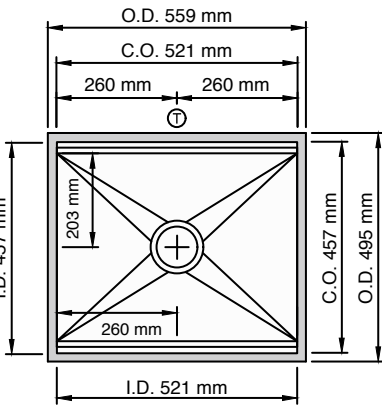


IWS 6S

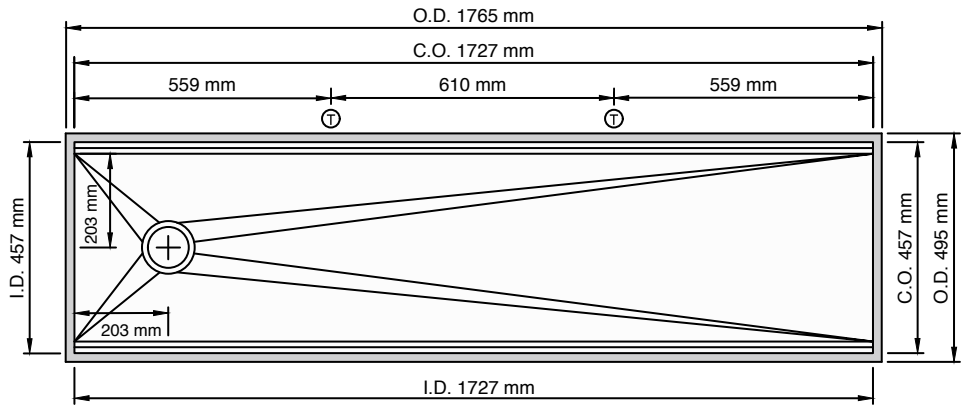


IWS 30S / IWA 30S

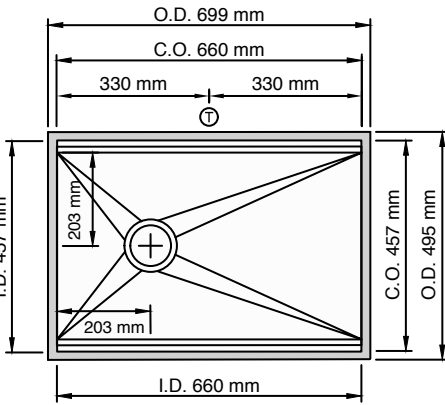


IWS 5S

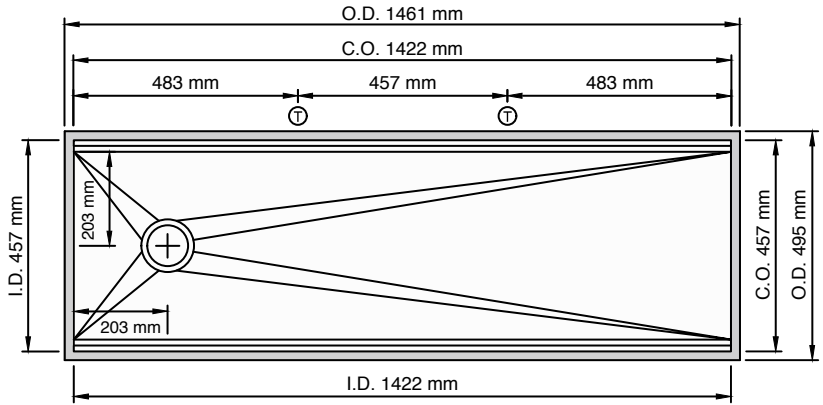

IWS 3S / IWA 3S

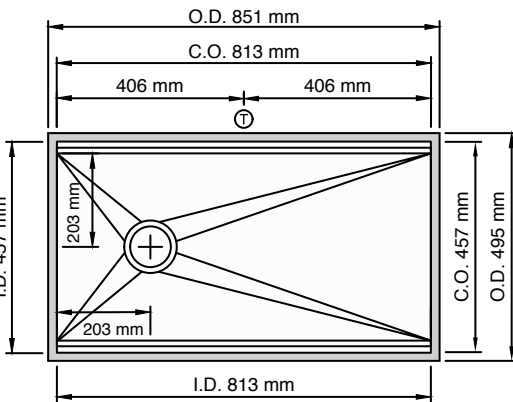


IWS 4S / IWA 4S

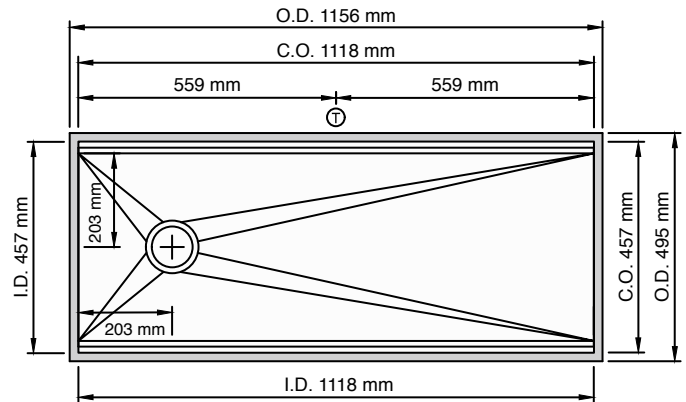

SUGGESTED GALLEY TAP PLACEMENT GUIDE
 Suggested maximum inside corner radius of countertop cutout 9.5 mm
 ① Galley Tap 35 mm minimum to 38 mm maximum hole diameter
 Center Tap hole diameters 51 mm behind cutout
Note: Tap Placements are for right hand or left hand drain orientation

ThinTop™ Work&WashStations™

Right Hand Drain Orientation

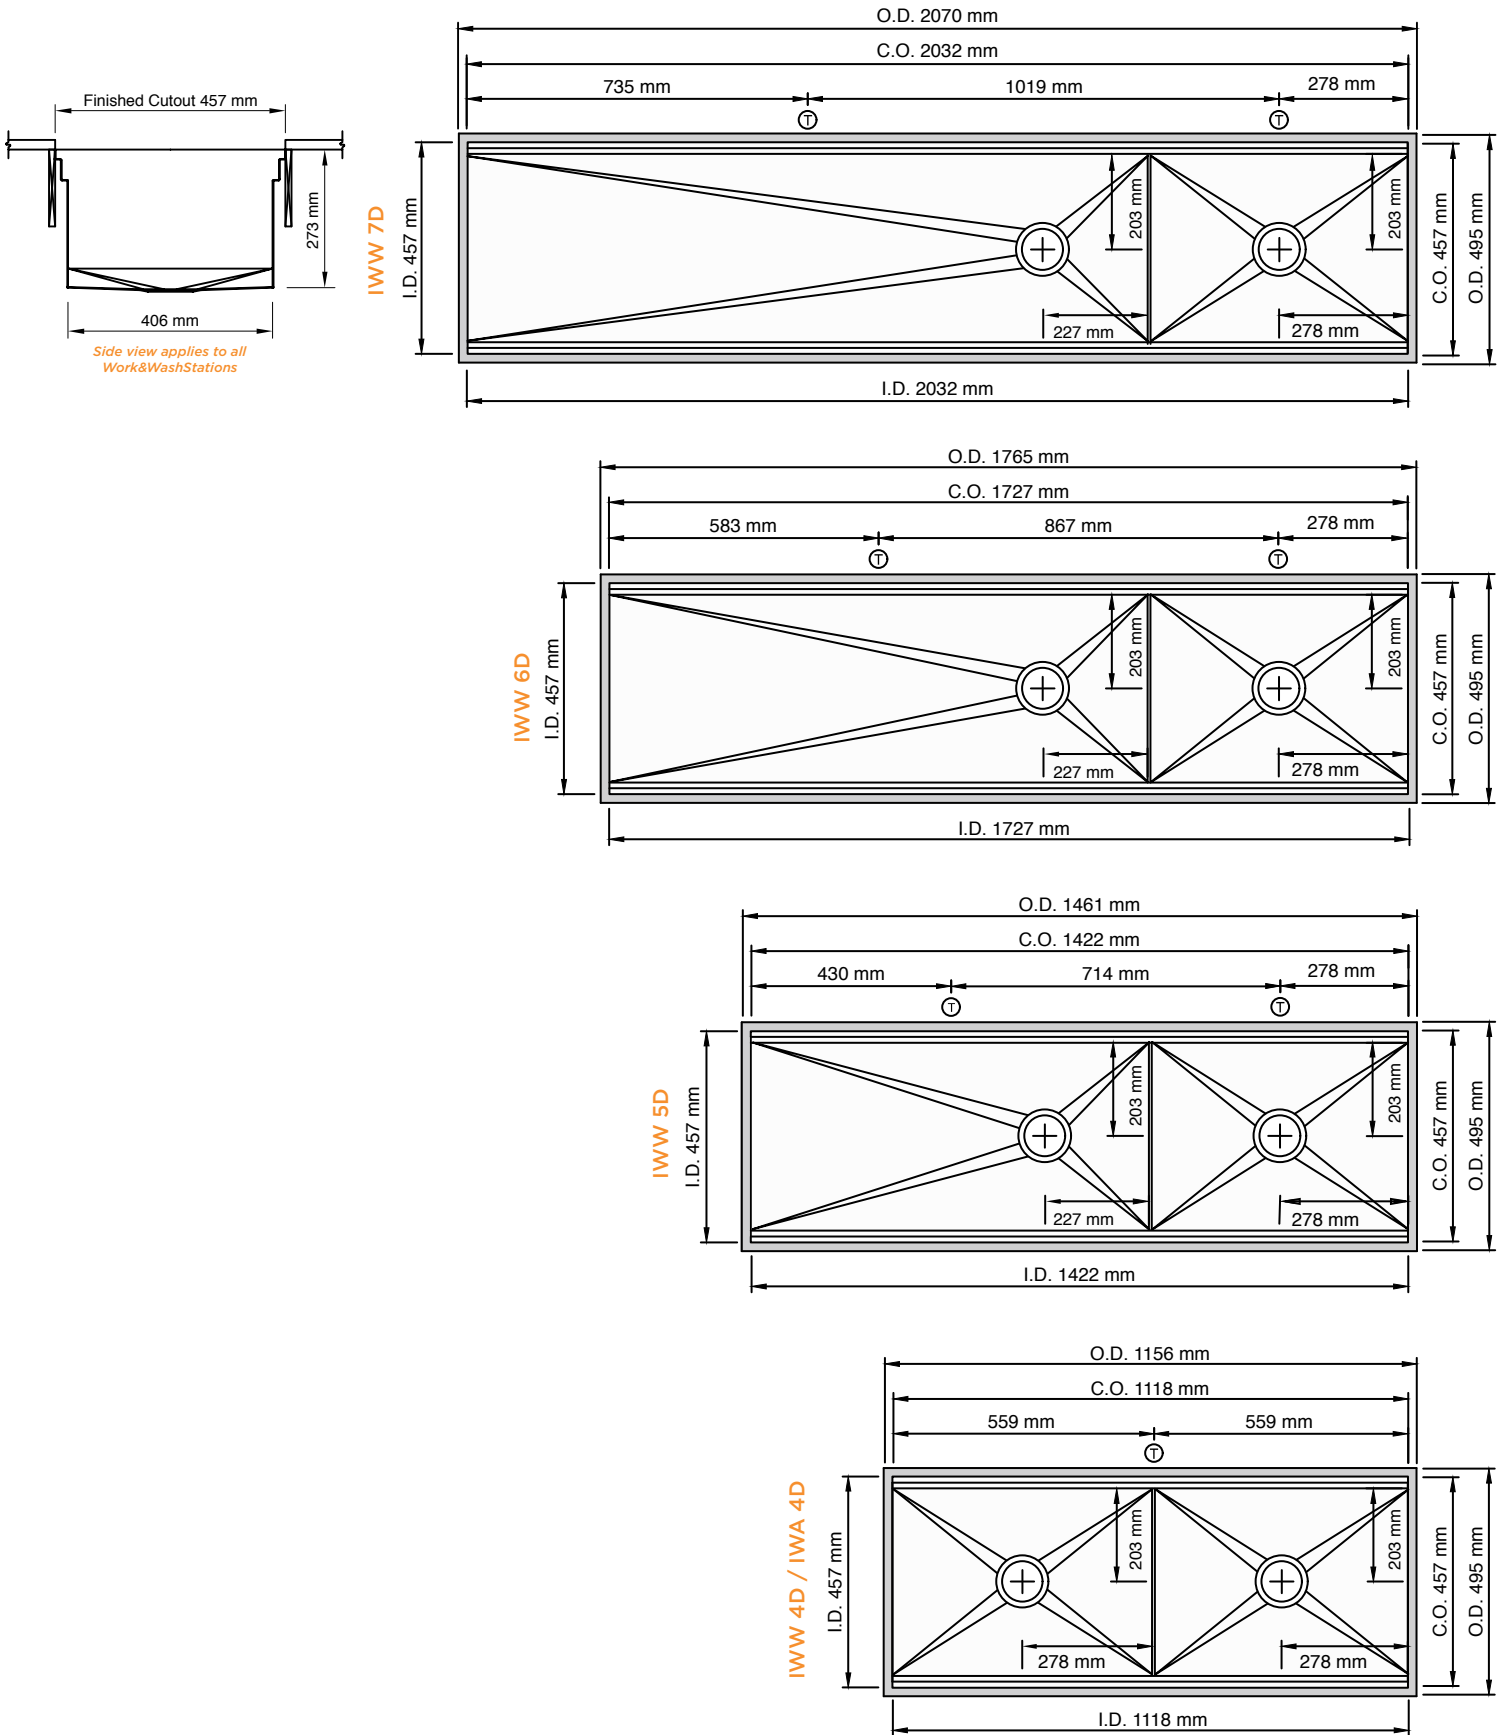


SUGGESTED GALLEY TAP PLACEMENT GUIDE
 Suggested maximum inside corner radius of countertop cutout 9.5 mm
 ① Galley Tap 35 mm minimum to 38 mm maximum hole diameter
 Center Tap hole diameters 51 mm behind cutout
Note: Tap Placements are for right hand or left hand drain orientation


Call 800.375.4255 or email customer@thegalley.com
 for additional guidance on Tap and Tap Accessory placements

ThinTop™ Work&WashStations™


Left Hand Drain Orientation




IWW 7D

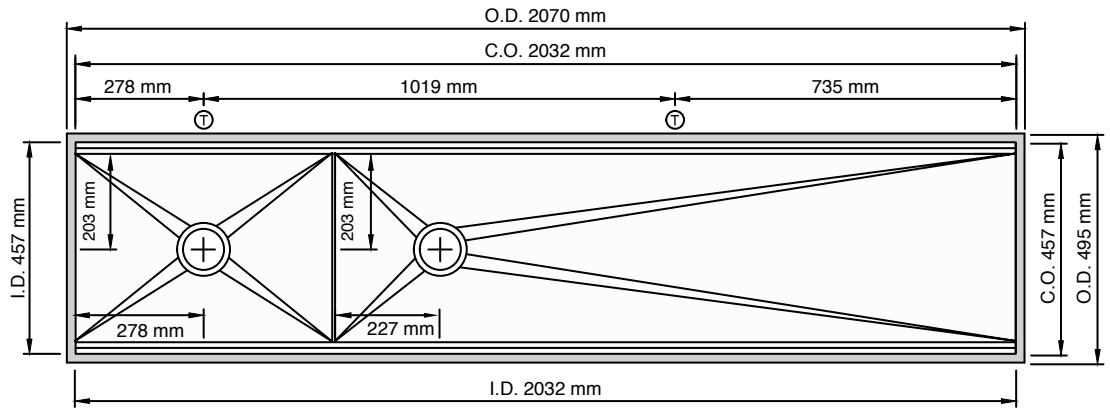


IWW 6D

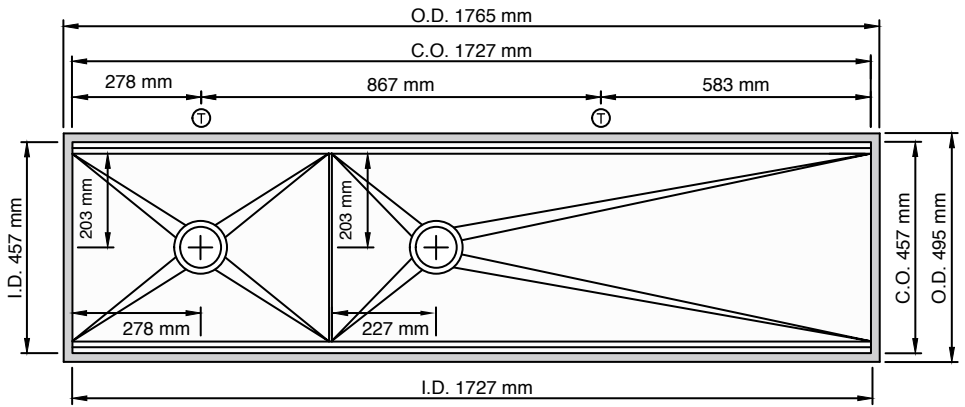

IWW 5D

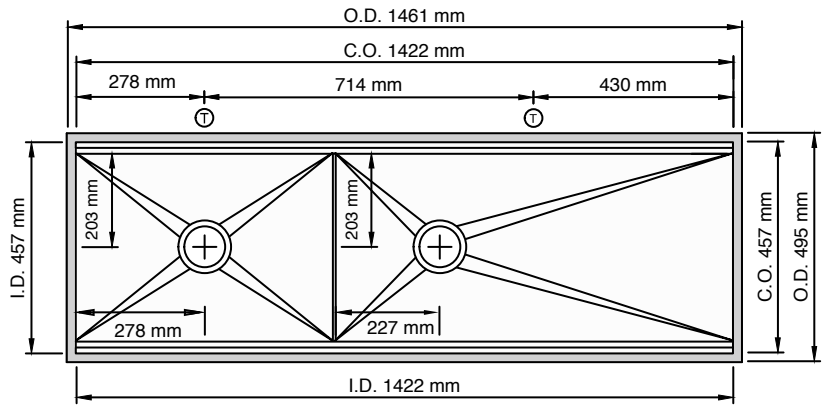


IWW 4D / IWA 4D

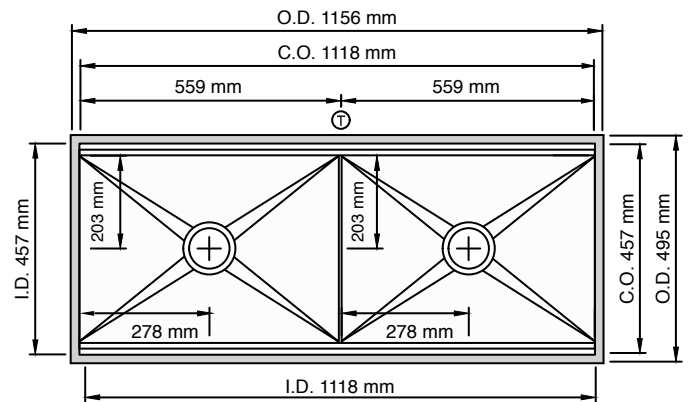


ThinTop™ BarStations® and WashStations™


Right Hand Drain Orientation




Side view applies to all BarStations and WashStations

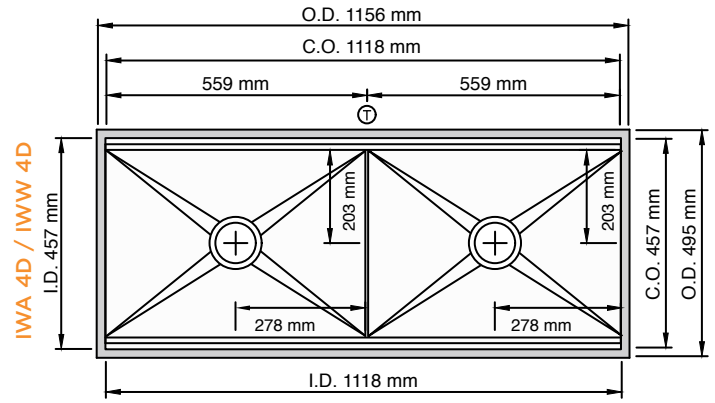


IWA 4S / IWS 4S

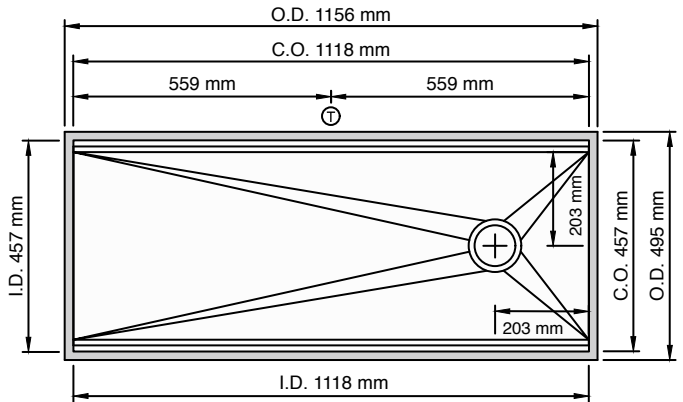


IBS 18C

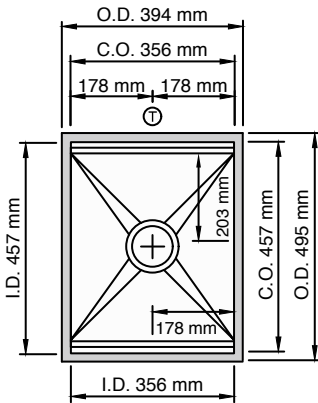


IWA 3S / IWS 3S

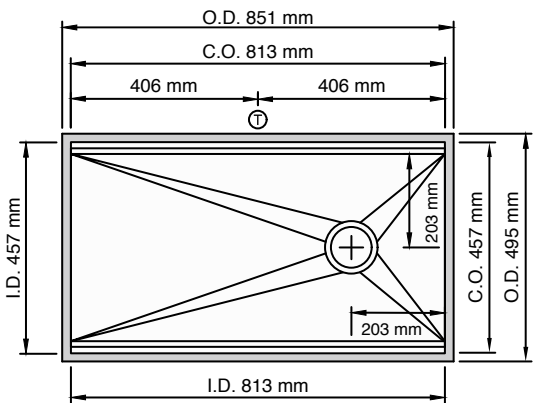

IWA 2C / IBS 2C / IWS 2C

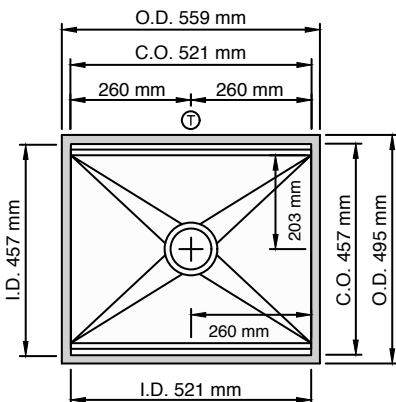


IWA 30S / IWS 30S

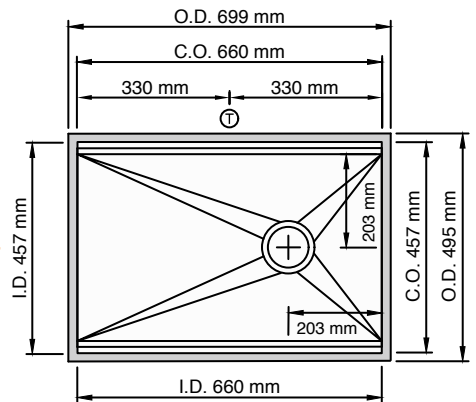







SUGGESTED GALLEY TAP PLACEMENT GUIDE
Suggested maximum inside corner radius of countertop cutout 9.5 mm
① Galley Tap 35 mm minimum to 38 mm maximum hole diameter
Center Tap hole diameters 51 mm behind cutout
Note: Tap Placements are for right hand or left hand drain orientation

ThinTop™ BarStations® and WashStations™

Left Hand Drain Orientation




Side view applies to all BarStations and WashStations

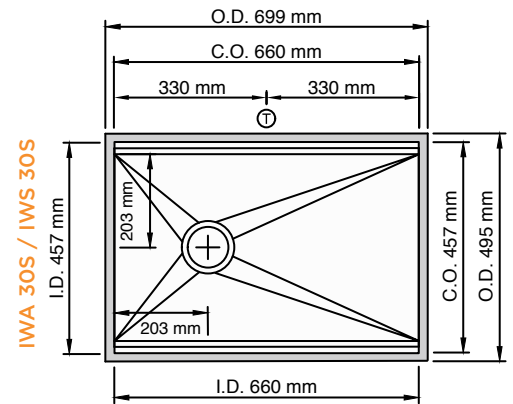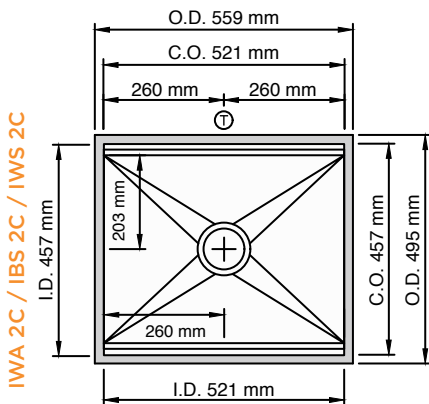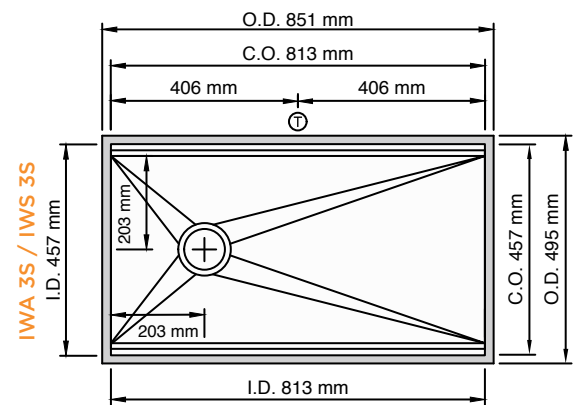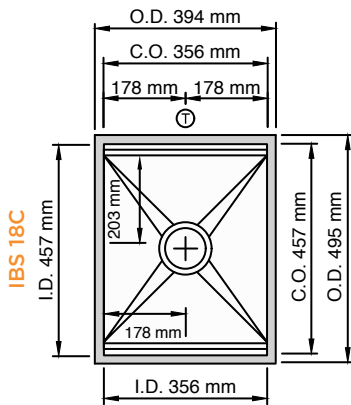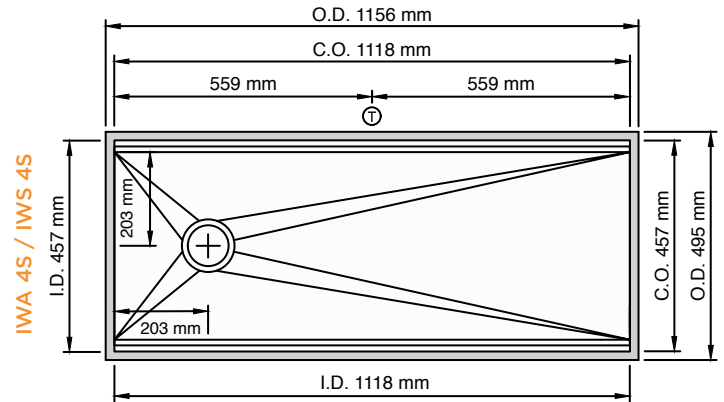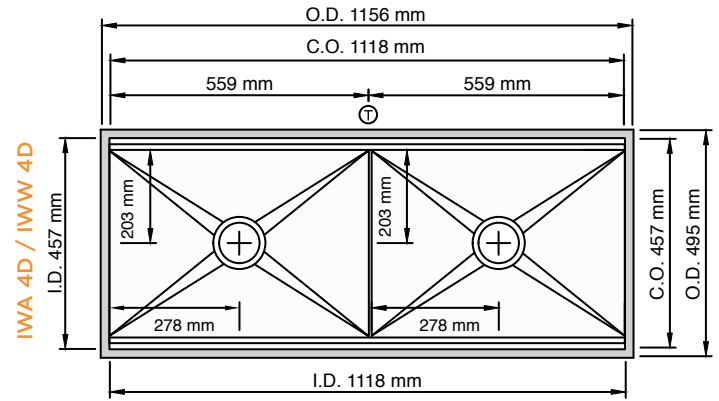

SUGGESTED GALLEY TAP PLACEMENT GUIDE
 Suggested maximum inside corner radius of countertop cutout 9.5 mm
 ① Galley Tap 35 mm minimum to 38 mm maximum hole diameter
 Center Tap hole diameters 51 mm behind cutout
Note: Tap Placements are for right hand or left hand drain orientation


In Stock ThinTop™ Workstations/WashStations™ + DryDock®

Right Hand Drain Orientation




Side view applies to all DryDock Workstations


IWS 4S + DD18
IWA 4S + DD18

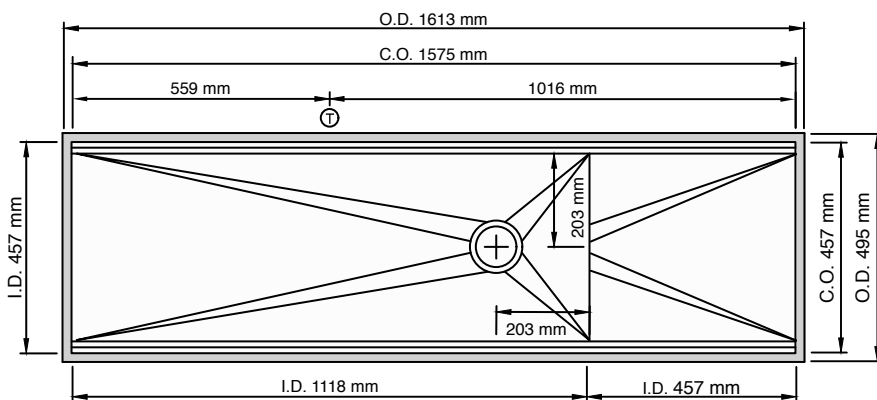


IWS 4S + DD12
IWA 4S + DD12

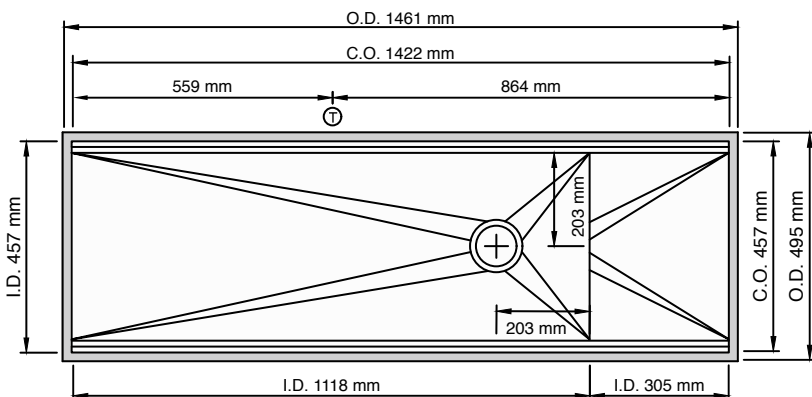


IWS 30S + DD12
IWA 30S + DD12

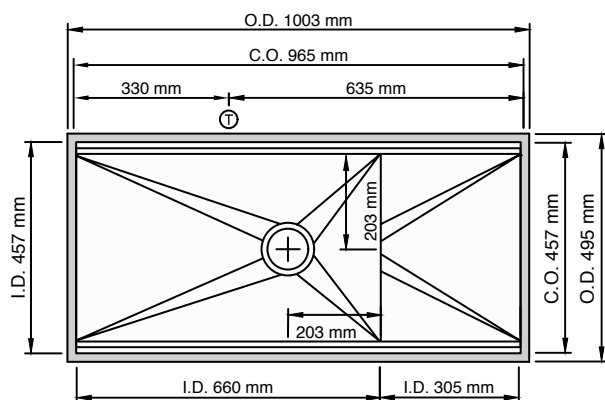


IWS 3S + DD18
IWA 3S + DD18

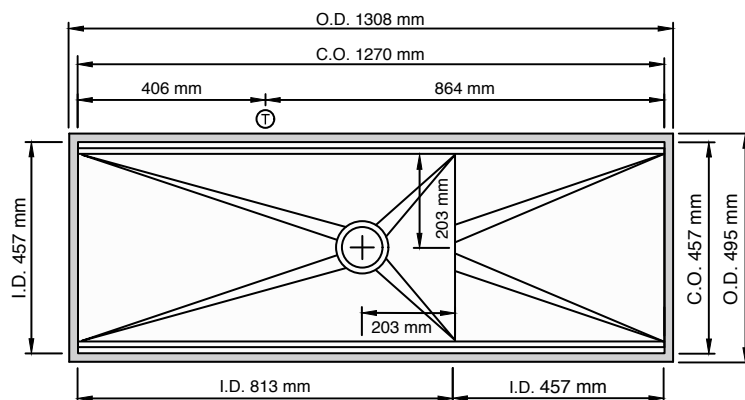

IWS 30S + DD18
IWA 30S + DD18

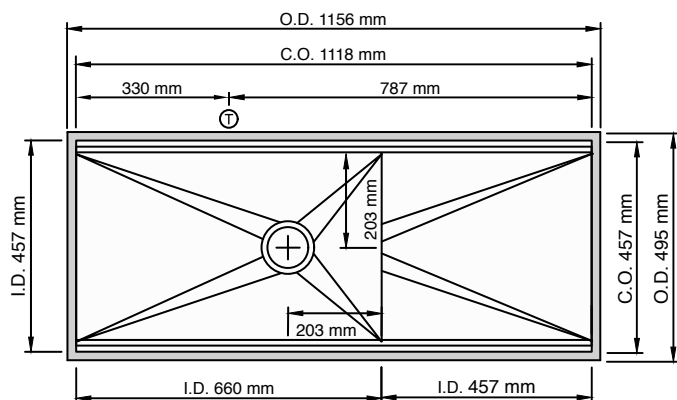

IWS 3S + DD12
IWA 3S + DD12

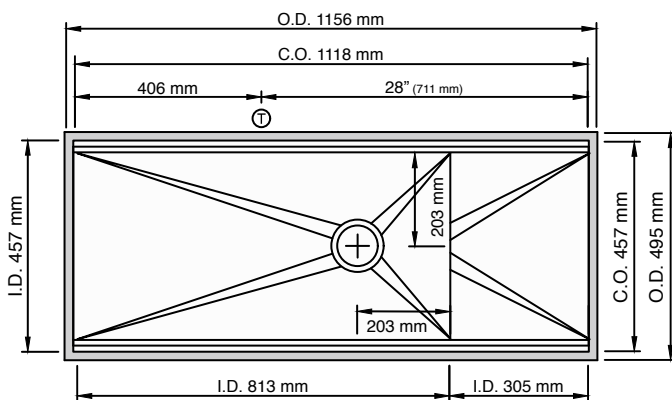

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 9.5 mm

① Galley Tap 35 mm minimum to 38 mm maximum hole diameter


Center Tap hole diameters 51 mm behind cutout

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer@thegalley.com
for additional guidance on Tap and Tap Accessory placements


In Stock ThinTop™ Workstations/WashStations™ + DryDock®

Left Hand Drain Orientation




Side view applies to all DryDock Workstations


IWS 4S + DD18
IWA 4S + DD18

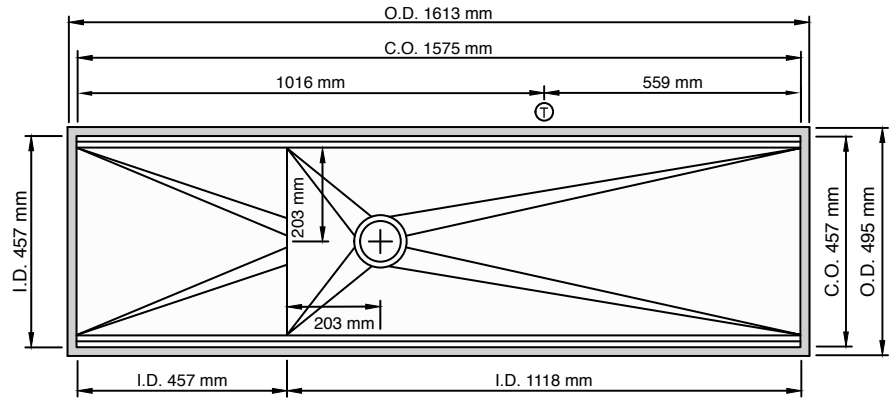


IWS 4S + DD12
IWA 4S + DD12

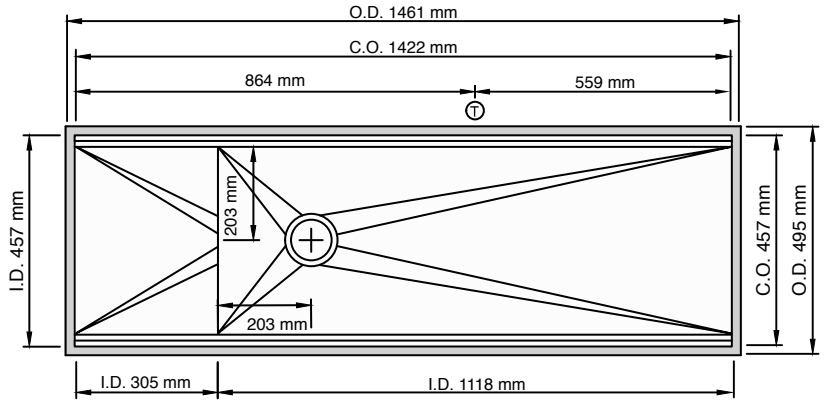


IWS 30S + DD12
IWA 30S + DD12

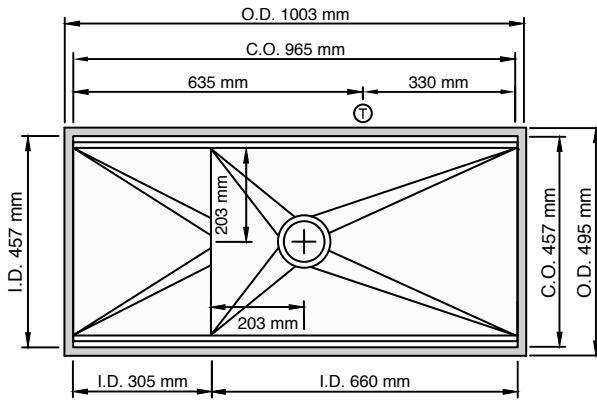


IWS 3S + DD18
IWA 3S + DD18

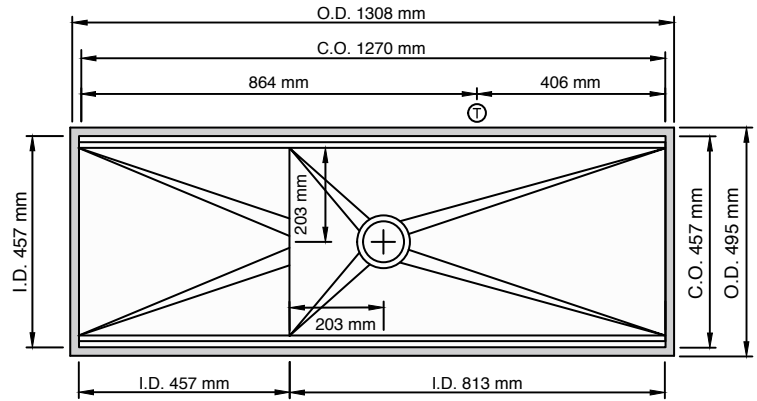

IWS 30S + DD18
IWA 30S + DD18

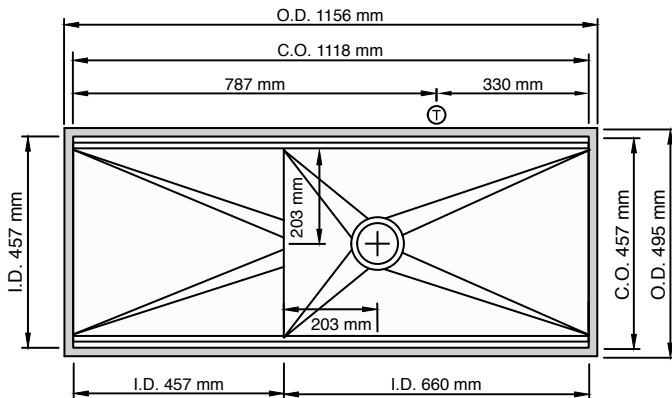

IWS 3S + DD12
IWA 3S + DD12

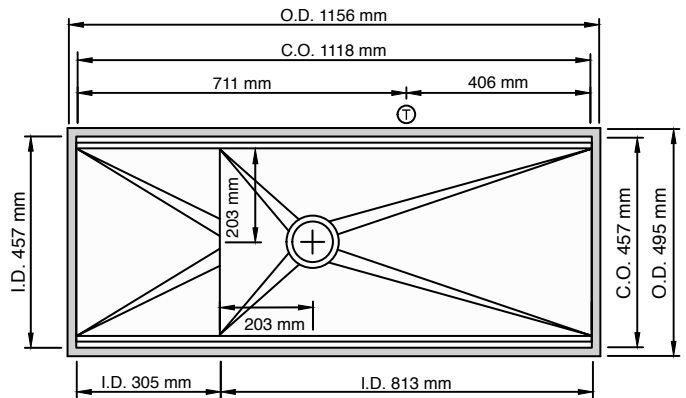

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 9.5 mm

① Galley Tap 35 mm minimum to 38 mm maximum hole diameter

Center Tap hole diameters 51 mm behind cutout

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com
for additional guidance on Tap and Tap Accessory placements

IMPORTANT

1. Please note: Unlike typical undermount kitchen sink installations, The Galley Workstation is installed in the cabinet prior to the counter being templated. **A wood support frame will need to be constructed and mounted inside the base cabinet(s) and recessed down 1.6 mm from the top of the cabinet(s).**

2. Leave the installation instructions tray affixed to The Galley Basin until the countertop has been templated, and leave the basin braces affixed to the Basin's tiers until the countertop has been installed and silicone has cured for a minimum of one hour.

3. The Workstation and Tap require a minimum of 571.5 mm inside the cabinet. For 610 mm deep inset cabinets installed against a wall, the cabinet must be pulled 25 mm away from the wall.

4. For countertops with a laminated or built-up decorative front edge, construct the wood support frame to finish 1.6 mm below the underside of the countertop cutout area.

Inspect The Galley Basin for any damage prior to installation. For any questions or concerns please contact us immediately at 800.375.4255 or customer@thegalley.com.

Please refer to all local plumbing and building codes prior to installation.

Tools



DRILL



CIRCULAR SAW



LEVEL



TAPE MEASURE



WOOD SCREWS



CLAMPS
(OPTIONAL)



(4) 19 MM X 140 MM
HARDWOOD BOARDS
(OR ANY SIZE A CARPENTER DEEMS
TO BE MOST EFFECTIVE)



CLOTH



51 MM
PAINTERS TAPE




100% CLEAR SILICONE



SPRAY BOTTLE

Before You Begin

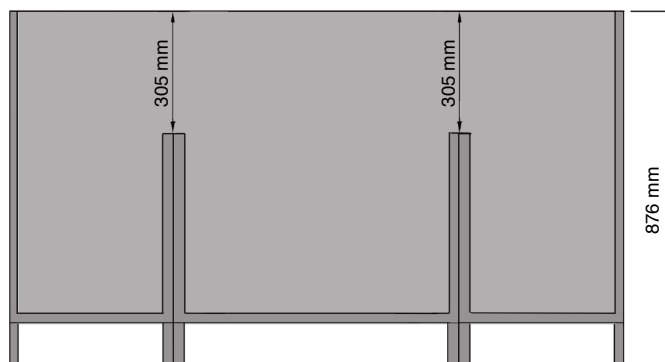

If your cabinet(s) have been built to accommodate your Galley Workstation, proceed to Step One. If you are joining two or more cabinets together to house the Galley Workstation, you will need to trim the bulkheads to create an 305 mm clearance for the Basin.

1. CONSTRUCT SUPPORT STRUCTURE

a) A wood support frame (cleat system) will need to be built and installed into the cabinet(s). This frame will support the weight of The Galley Workstation.

NOTE: Clips are NOT to be used.

b) Construct the support frame so that the inside dimensions of the frame are 6 mm larger than the Basin's inside width and length dimensions. Please refer to pages 1-8 for your Galley dimensions.

NOTE: For a Galley Workstation + DryDock., the support frame must be built with 19 mm x 44 mm boards so that there is no interference with any undercounter appliances.

2. ATTACH THE SUPPORT FRAME TO THE INTERIOR WALLS OF THE CABINET

IMPORTANT




Place the support frame into the cabinet flush with the front of the cabinet. This will ensure that there is the minimum 70 mm plumbing space from the back of the frame to the cabinet wall needed.

The support frame must be installed 1.6 mm lower than the top of the cabinet.

NOTE: Use a level to ensure that the support frame is installed level in the cabinet. Once installed, the top of the Basin Flanges will be flush with the top of the cabinet.

Attach the support frame to the interior walls of the cabinet.

EXAMPLE
IWS 5 SUPPORT FRAME
DIMENSIONS SHOWN

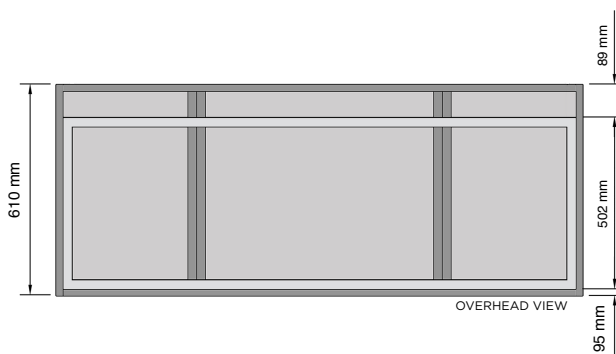
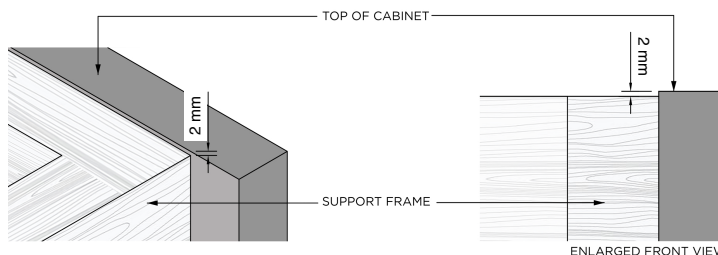
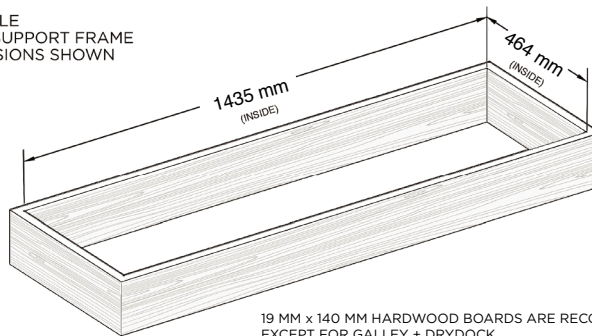


3. INSTALL THE WORKSTATION BASIN

a) Carefully place The Galley Basin into the cabinet by resting the flanges on the support frame. All four flanges should rest on the support frame.

b) Use a level to ensure that the flanges are level. The top of the flanges should be flush with the top of the cabinet.

c) Position the Basin so that it is perfectly square within the cabinet.

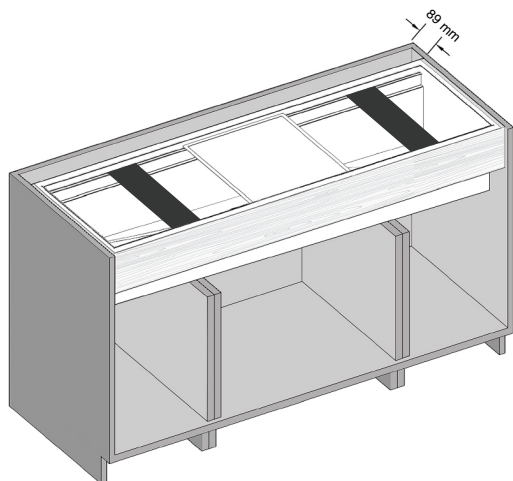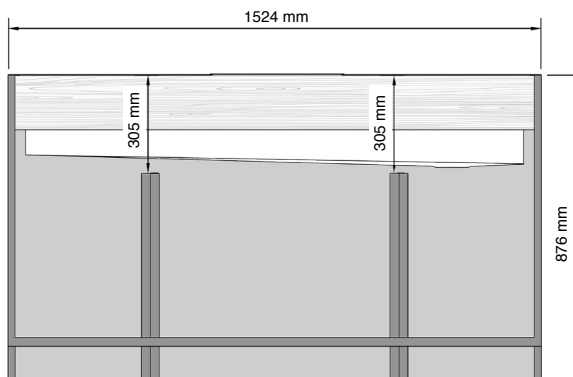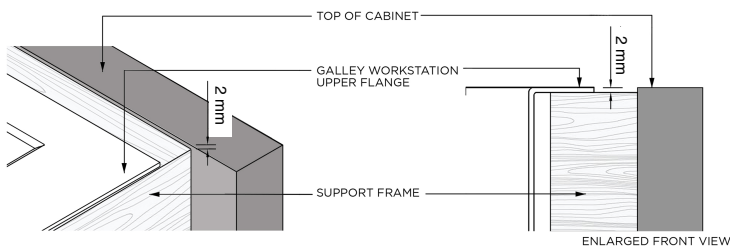

YOU ARE NOW READY FOR THE COUNTERTOP FABRICATOR

Countertop Installation

Use the white template tray affixed to The Galley Basin flanges as your guide for the front to back, and left to right cutout. Refer to pages 1-8 for your overall cutout dimensions or refer to the drawing on the template tray.

NOTE:

The suggested maximum corner radius is 9.5 mm.

Please refer to countertop manufacturer's warranted minimums

The front to back cutout dimension must always be cut exactly at 457 mm to ensure that all Culinary Tools work properly on the Basin tiers. The left to right dimension should be cut exactly to the specs outlined in pages 1-8.

STEP 1

Tape off the interior edge of the Basin along the perimeter of the flange. This tape will catch any excess caulking that is produced when the countertop is installed.

STEP 2

Apply a heavy, even bead of silicone to the Basin's exposed flange.

STEP 3


Before setting the countertop in place, make sure the Basin is perfectly square in the cabinet. Set the countertop and position it properly. The countertop cutout should be flush with all four sides of the Basin, confirmed with a zero reveal.

STEP 4

Once the countertop has been set and the zero reveal confirmed, remove the excess silicone that is on the taped flanges with a wet rag.

STEP 5

Wait approximately one hour and remove tape and Basin braces. This will leave clean and even lines of silicone along the Basin flanges.

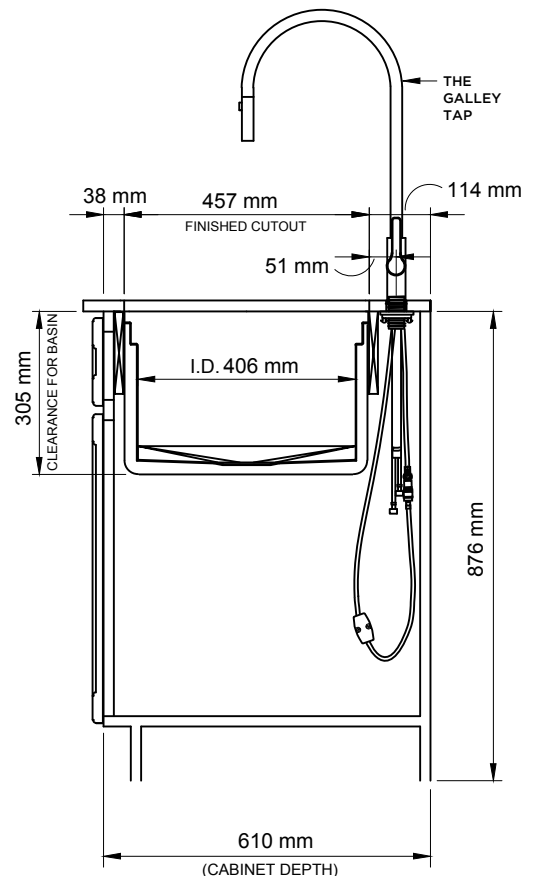

The Galley Workstation. Limited Lifetime Warranty

1. GALLEY WORKSTATION LIMITED LIFETIME WARRANTY - Seller provides a Limited Lifetime Warranty. Seller warrants its stainless steel sink, installed in a residential application, to be free from manufacturing defects in materials and workmanship under normal residential usage. This Limited Lifetime Warranty is subject to the warranty conditions and limitations as set forth below.

2. WARRANTY CONDITIONS AND LIMITATIONS - Seller's warranty is non-transferable and is strictly limited to products correctly installed using our installation instructions and used in a residential environment. This warranty is limited to defects or damages resulting from normal residential use and does not cover surface corrosion, (chemical or natural, including exposure to salt air, sea spray, acid rain, or environmental chemicals), scuffs or scratches, misuse, abnormal or abusive use, dents, deformations caused by the impact of any object, improper installation, care and/or maintenance, commercial use, environmental factors causing damage, shipping or freight damage, or common signs of normal wear and tear, (scratching, staining and alkaline etching of the finish over time due to use, cleaning practices or water or atmospheric conditions, are not manufacturing defects but are indicative of normal wear and tear however, these symptoms are easy to remedy). This limited warranty is null and void if the Product has been repaired, altered, or modified other than by Seller or under Seller's supervision. The Seller is not responsible for labor charges, installation or other incidental or consequential costs. In no event shall the liability of Seller exceed the purchase price of the product. If the product is installed outside of North America, Seller warrants product to be free from defects in material and workmanship for one (1) year from the date the product is installed, with all other terms of this warranty applying except duration. If the product has not been purchased from Seller or from an Authorized Dealer or Distributor of the Seller, this warranty is null and void.

3. CULINARY TOOLS - The Culinary Tools are not covered under warranty. If a defect is found in normal residential use, Seller will, at its election, repair, replace or make appropriate adjustment. All items made of Natural Golden Bamboo or American Black Walnut should not have prolonged exposure to direct sunlight or be stored outdoors.

4. CARE AND MAINTENANCE - For care and maintenance instructions of all Galley products, please refer to the Use and Care section on thegalley.com.

5. WARRANTY CLAIMS - For warranty service and to purchase replacement parts, please contact the Customer Service team. To arrange for service under warranty, please prepare the following information:

1. Product model
2. Installation date
3. A description of the problem

The Galley range of goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

CONTACT US

Website www.winningappliances.com.au/s/services
Email service@winning.com.au
Phone +61 2 9694 0300
Mail Winning Appliances Pty Limited ACN 002 193 688
20A Danks Street
Redfern NSW 2016

You must retain your original proof of purchase. Failure to produce proof of purchase when requested may, at The Galley, LLC's discretion, invalidate your claim.

The warrantor is:
The Galley, LLC.
Attn: Warranty Claims
12626 South Memorial Drive
Bixby, OK 74008
USA

Australian Representative:
Winning Appliances Pty Limited ACN 002 193 688
20A Danks Street
Redfern NSW 2016
+61 2 9694 0300
Winning.com.au

Please include the original receipt with a description of the problem, model number, store, date of purchase, your name, address and telephone number.



Corporate Headquarters

The Galley, LLC
12626 South Memorial Drive
Bixby, OK 74008
800.375.4255
thegalley.com