


SA911XA

smeg 90cm ceramic electric cooktop, touch control

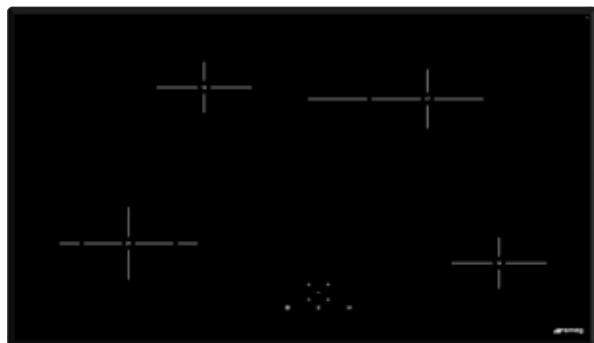

PLEASE NOTE: smeg ceramic cooktops are highly-efficient cooking surfaces. They are at their most efficient with flat-based cooking vessels. We recommend stainless steel exterior based vessels — that is, the surface be of stainless steel. This flat stainless steel surface will help preserve the unblemished look of the ceramic surface and help avoid scratching and permanent marking. High-quality cast-iron surfaces may also be suitable.

EAN	3760120861628
size	900mmW x 520mmD x 55mmH
cutout	860mmW x 490mmD
finish	black ceramic frameless surface
edge	bevelled ceramic
zones	four plus two expansion zones
controls	touch
heat levels	nine per zone
timer	1-99 minutes programmable cooking times, simultaneous and variable times, audible signal
residual heat elements	hot surface 'H' LED warning all high-speed series 8 ribbon elements, full heat 7 seconds
warranty	in-house, two years parts and labour
kitchen timer	INDEPENDENT 1-99 minute timer with audible signal

"GO AND STOP"

For improved energy and time efficiencies, when a heat setting is selected for a particular zone, full power is applied for a very brief initial phase before it returns to the preselected heat level. This pre-emptive heat aid is referred to as 'go and stop' in the cooktop's accompanying instruction booklet.

AUTOMATIC STOP

Each zone can be preset with an individual cooking duration (up to 99 minutes). This timed cooking can be selected for respective different times on different zones — that is, all zones can be operated simultaneously and at different time settings. When the individual zone's timed cooking duration elapses, the controls will flash '00' and an audible signal will emit.

KITCHEN TIMER


The cooktop's controls can also be used as an independent, variable countdown timer with audible end signal. Range is one through 99 minutes.

THERMAL OVERLOAD PROTECTION

For safety, the cooktop will default to 'OFF' in any extreme conditions, such as a continuous overflow of boiling fluids or a utensil cooking its contents dry. Cooking can only be resumed after the fault has been cleared from the electronic LED safeguards. Also for safety reasons, cooking cannot resume automatically — it must be manually restarted.

SA911XA


smeg 90cm ceramic electric cooktop, touch control

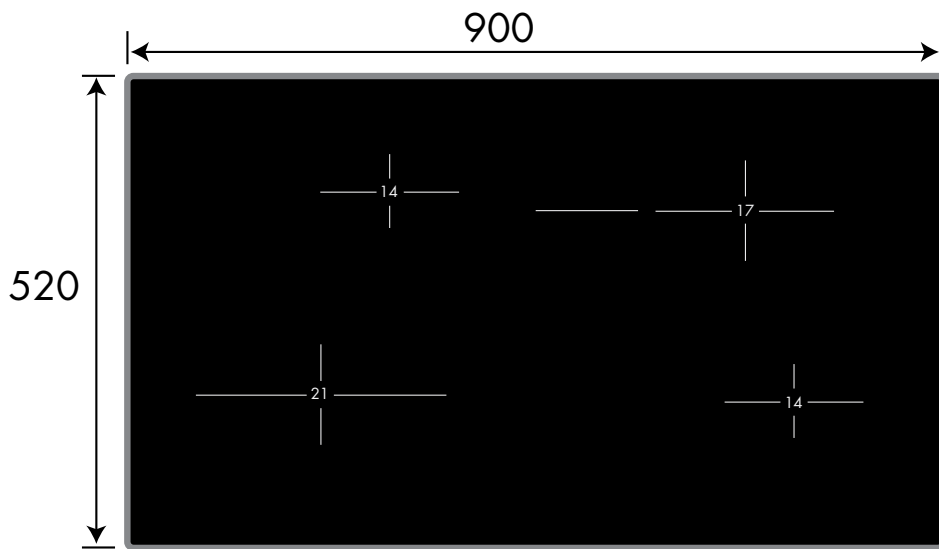



front left: 100/2200W (140/220mm)
 rear left: 1200W (155mm)
 rear right: 1500/2400W (180/270mm)
 front right: 1200W (155mm)

7000 watts total, 29.2 amps hard wired

CUTOUT: 860mmW x 490mmD

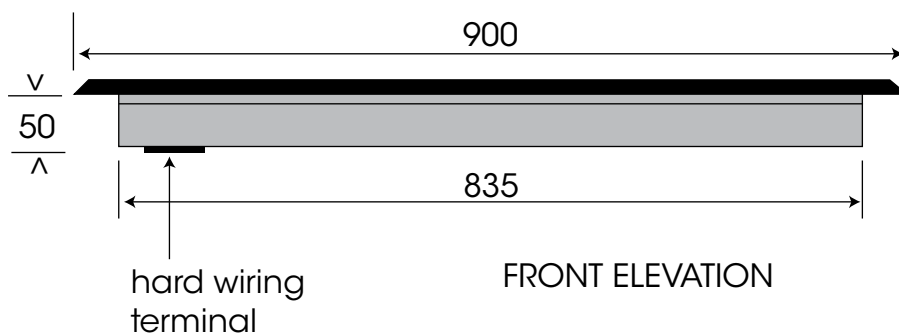

FRONT ELEVATION

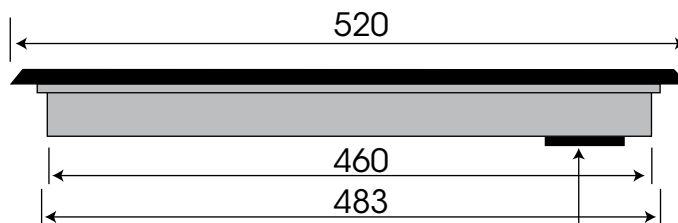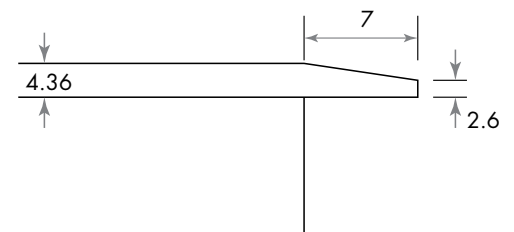

SIDE ELEVATION

hard-wiring terminal

packaged dimensions	1040mm x 605mm x 80mm = 0.051 cubic metres
gross weight	13kg
net weight	12kg

NB: THESE DRAWINGS ARE NOT TO SCALE — THEY ARE TO ASSIST ONLY.