




NOTE

See next page
for compatible
actuators

Minimum of
100mm from rear
of cistern to front
edge of finished
wall surface

Min. projection
of 10mm - Max.
projection of 80mm of
tile flange box required
prior to trimming to
accommodate actuator.

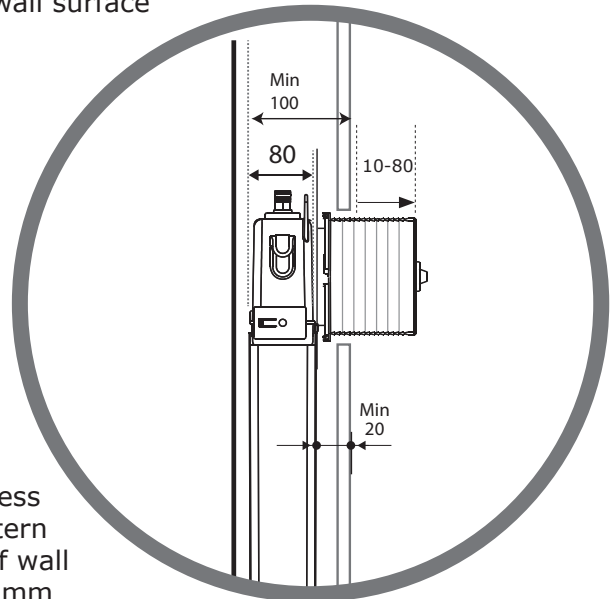

Minimum thickness
from front of cistern
to the front face of wall
to be at least 20mm

Oli-74

IN-WALL CISTERN

STYLE

In Wall Cistern

CODE

601602/MC
(if used with mechanical actuators)

601602/PN
(if used with pneumatic actuators)


WEIGHT

3.5 kg


FEATURES

- Front access only
- Dual flush in-wall cistern with 4.5/3 litre flush
- 80mm min. wall cavity requirement
- 10 Year Warranty
- Manufactured in Europe
- Mechanical actuator kit included

Front View

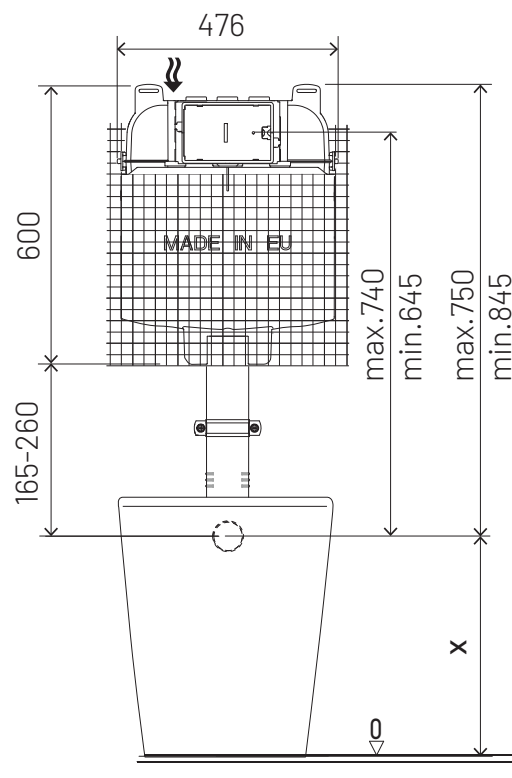

Side View

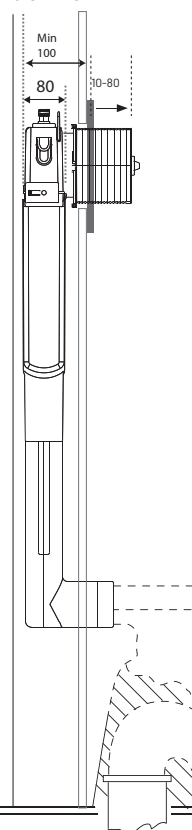

WELS RATING



COMPATIBLE ACTUATORS

Oli 74
IN-WALL CISTERN

Cistern Code by Actuator

					
GLAM	GLOBE	OCEANIA	OCEANIA MIA	PLAIN	SLIM
601602/MC	601602/MC	601602/MC	601602/MC	601602/MC	601602/MC

				
BLINK	TREND	SPHERA +	SPHERA -	KARISMA
601602/PN	601602/PN	601602/PN	601602/PN	601602/PN