



Color Variants

CM450111
Stainless steel-backed full glass door
Width 60 cm
CM450101
Full glass door in Gaggenau Anthracite
Width 60 cm

Included accessories

1 x assembly screws.
1 x scoop.
1 x test strip.
1 x milk container (insulated).
1 x connection hose for milk frother.
1 x milk pipe.

CM450111
Fully automatic espresso machine 400 series
Stainless steel-backed full glass door
Width 60 cm
Controls at the top

Handleless door / automatic door opening
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
Espresso / 2 x Espresso.
Espresso Macchiato / 2 x Espresso Macchiato.
Coffee / 2 x Coffee.
Americano / 2 x Americano.
Caffe Latte / 2 x Caffe Latte.
Latte Macchiato / 2 x Latte Macchiato.
Cappuccino / 2 x Cappuccino.
Flat White / 2 x Flat White.
Milk froth / 2 x Milk froth.
Warm milk / 2 x Warm milk.
Hot water / 2 x Hot water.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Personalisation function, option to save 8 individualised beverages.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
3 coffee temperature levels.
10 hot water temperature levels.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for single beverage order.
For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lightning with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.
Electronic water filter exchange indicator.

Characteristics
Built-in / Free-standing
Frothing nozzle
Yes
Display
Water protection system
no
Portion sizes
All cups
Dimensions of the product (mm)
455 x 590 x 444
Dimensions of the packed product (HxWxD) (mm)
540 x 478 x 670
Required niche size for installation (HxWxD)
449 x 558 x 347
Hot water spout
Yes
Adjustable programs
Standby function
Yes
Pump pressure (bar)
19
Simultaneous preparation of 2 cups
Yes

Included accessories
1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories

Consumption and connection features
Electrical connection rating (W)
1600
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50/60
Plug type
Gardy plug w/ earthing
Product group
Built-in coffee machine
Brand
Gaggenau
Product name/family
Product name / Commercial code
CM450111
Universal Product Code
Main colour of product
Stainless steel

Typology
Fully automatic
Approval certificates
Australia Standards, CCC, CE, Eurasian, UA, VDE
Length electrical supply cord (cm)
170.0
Length of electrical supply cord (in)
Recommended height for installation (in)
Recommended height for installation (mm)
449
Appliance Dimensions (h x w x d) (in)
Dimensions of the product (mm)
455 x 590 x 444
Dimensions of the packed product (in)
Dimensions of the pallet (in)
Dimensions of the packed product (HxWxD) (mm)
540 x 478 x 670
Net weight (lbs)
51
Net weight (kg)
22.95
Gross weight (lbs)
57
Gross weight (kg)
25.68
Capacity water container
2.4

2018-03-13  
Page 1

Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Cleaning


Fully automatic rinse programme when machine is turned on/off.  
Automatic steam cleaning of the milk system after every beverage.  
Automatic cleaning and descaling programme.  
Emptying programme to prepare the appliance for holiday or transportation.  
Empty-grinding function to remove coffee residues from the system when switching bean types.  
Removable brewing unit.  
Dishwasher-safe coffee residue container and drip tray.  
Dishwasher-safe beverage dispenser.

Planning notes


Ideal installation height 95 cm to 145 cm (top edge of niche bottom).  
The door panel surface of the appliance extends 47 mm from the furniture cavity.  
When installing in a corner a side clearance is required.  
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.  
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.  
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).  
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.  
Special accessories (order as spare parts):  
Part No. 17000705 Water filter  
Part No. 00311819 Descaling tablets  
Part No. 00311769 Cleaning tablets  
Part No. 00636455 Door hinge restrictor (92° opening angle)  
Part No. 11015223 Bean container with lid

Connection

Total connected load 1.6 kW.  
Connection cable 1.7 m with plug.

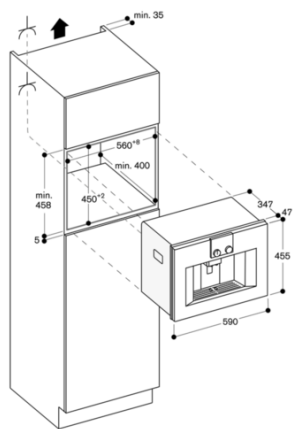

Left corner installation

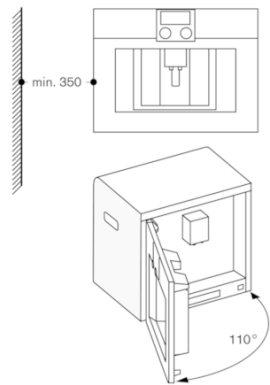

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.