



#### Color Variants

VP414111

Width 38 cm

#### Included accessories

2 x spatula.

#### Installation Accessories

VA420000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA420010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA440010

Stainless steel appliance cover with mounting strip

VP414111

Vario Teppan Yaki 400 series

Width 38 cm

Can be combined perfectly with other Vario appliances of the 400 series  
Cooking directly on the hard-chromed metal surface, without any pots or pans  
Exact temperature control up to 240 °C  
Optimum heat distribution  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting

#### Cooking zones

Usable area 31 x 44cm (WxD)

#### Handling

2 flexible installation control knobs (1m connecting cable)  
Control knobs with illuminated ring, cooking zone and temperature markings.  
Electronic temperature control from 120 °C to 240 °C.

#### Features

Stainless steel  
Two zones, each 1500 W, can be operated together as a complete surface or each half separately.  
Keep warm setting.  
Cleaning stage.  
Easy to clean, similar to a cast pan.

#### Safety

Safety shut-off.  
Pre-heat and residual heat indicator.  
Operation indicator.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
Appliance can be snapped into the worktop from above.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.  
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:

#### Characteristics

Product name/family

Vario/Domino Teppan Yaki

Built-in / Free-standing

Built-in

Energy input

Electric

Type of control

Electronic

Grill grating material

Required niche size for installation (HxWxD)

118 x 360 x 490

Width of the product (mm)

380

Dimensions of the product (mm)

118 x 380 x 520

Dimensions of the packed product (HxWxD) (mm)

400 x 460 x 600

Net weight (kg)

12.276

Gross weight (kg)

16.1

Residual heat indicator

Separate

Location of control panel

Basic surface material

Color of surface

Stainless steel, Stainless steel

Color of frame

Stainless steel

Approval certificates

Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE

Length electrical supply cord (cm)

150

EAN code

4242006280130

#### Consumption and connection features

Electrical connection rating (W)

3000

Gas connection rating (W)

Current (A)

16

Voltage (V)

220-240

Frequency (Hz)

50-60

2019-10-28

Page 1

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.


A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted. Appliance weight: approx. 12 kg.

#### Connection

Total connected load 3.0 kW.


Connecting cable 1.5 m without plug.

Installation of the control knob; flush installation

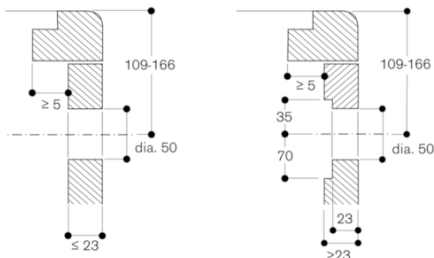


measurements in mm

Installation of the control knob; surface mounting

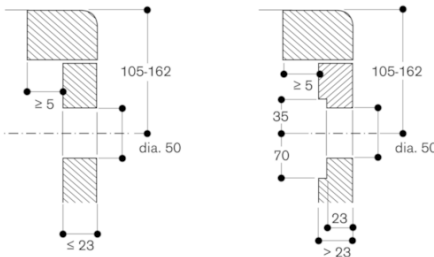


measurements in mm

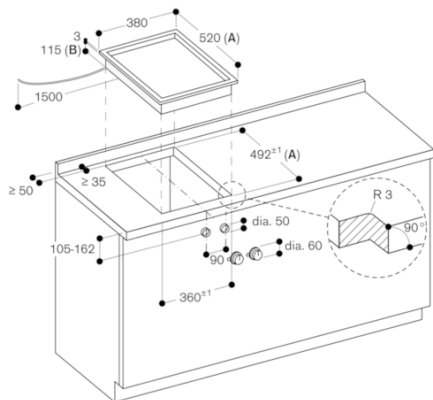

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
B: 130 mm in the area of the cable clamp (left, on the rear side)


measurements in mm

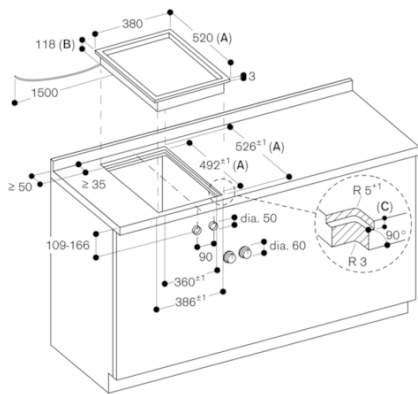

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
B: 133 mm in the area of the cable clamp (left, on the rear side)  
C: 3.5<sup>±0.5</sup>

measurements in mm


Longitudinal section

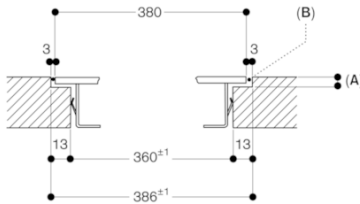

A: 3.5<sup>±0.5</sup>  
B: Fill with silicone

measurements in mm


View from above



A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Cross-section

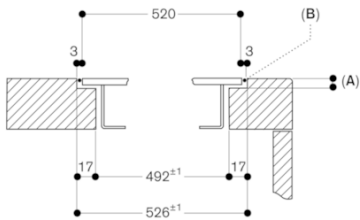


A: 3.5<sup>0.5</sup>  
B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.


measurements in mm

Installation with appliance cover, surface mounting

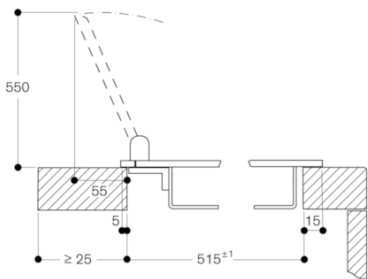


measurements in mm

Installation with appliance cover, flush mounting

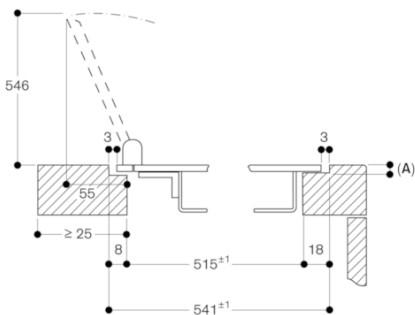


A: 3.5<sup>0.5</sup>  
measurements in mm

Installation with appliance cover, surface mounting

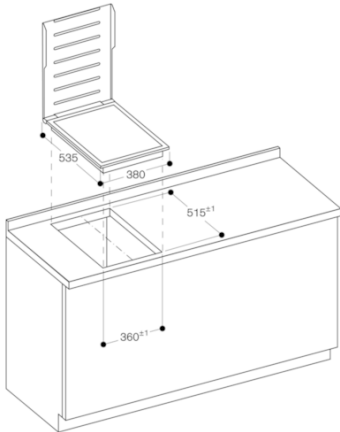

measurements in mm

Installation with appliance cover, flush mounting

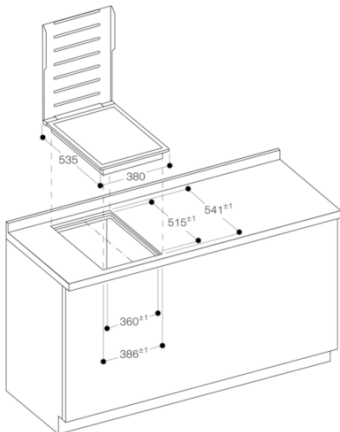

measurements in mm