


Water Filtration

Lead  FREE

All dimensions in mm

FS7005-LF

Filter Connection Kit for 3 Way Filter Tap or Satellite Filter Tap

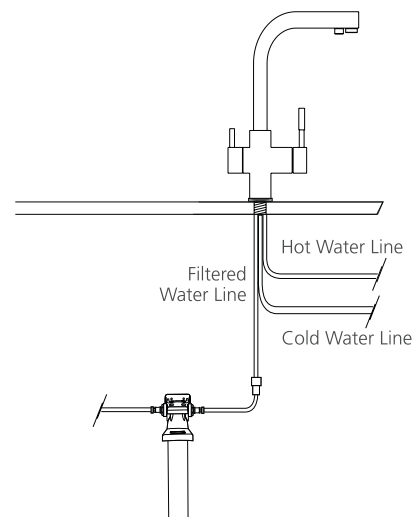

Specifications /

Micron rating	1 micron with limescale reduction
Maximum flow rate	0 - 3L per minute
Temperature rating (min / max)	2°C - 38°C
Capacity	9,450 litres or 1 year, whichever comes sooner †
System connection required	1/2" bsp
Water Pressure	70 - 500 kPa (can be installed with a pressure limiting valve)
Installation	Vertical or horizontal
Space required (allows for cartridge replacement)	Vertical installation: 460 mm height, 225 mm width Horizontal installation: 225 mm height, 460 mm width
Carton size	306 x 174 x 139 mm
Product weight	1.5 kg
Replacement cartridge model	FR7905
Warranty	6 years (refer to oliveri.com.au)
Maintenance and care instructions	Filter cartridge must be replaced after 9,450 litres and at least every 12 months.

Inclusions /


Oliveri filter cartridge (FR7905)

Dual check non-return valve
Stainless braided pex hose 750mm
Head assembly with mounting bracket
Mounting screws and plumbers tape
Installation instructions

Matching products /



FR7905
Replacement
Cartridge



VE523FCR
Goose Neck 3 Way
Filter Tap