


Arq ii by Rogerseller

Technical Overview

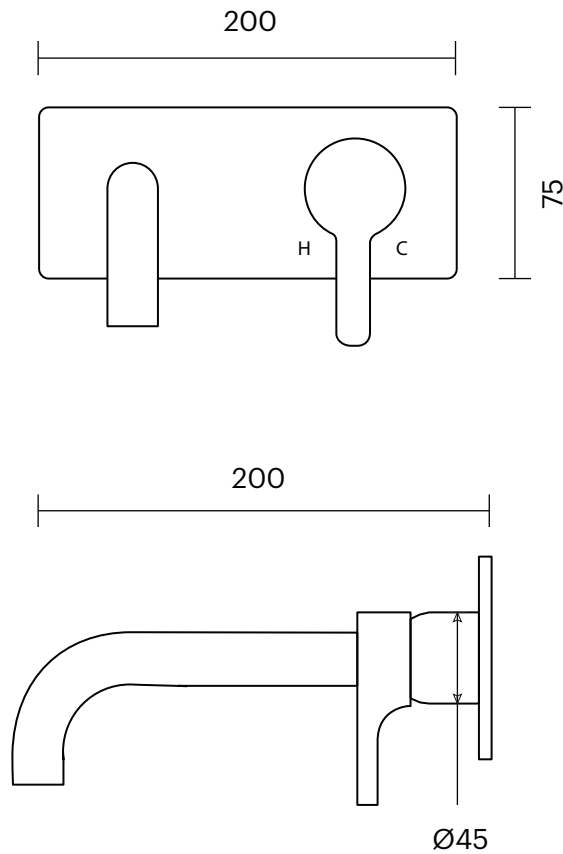

Arq ii by Rogerseller Wall Mixer
with 200mm Outlet
3646000201 — Chrome

4 finishes available

Please note

- Secure the mixer body to a suitable noggin, take note of the finished wall dimension to ensure the mixer body is positioned correctly.
- The mixer must be installed square to the finished tile face to ensure the cover-plate sits flush.
- During rough in always make sure the protective cover is left on to prevent damage to the mixer.
- Brazed connections should NOT be made directly onto the mixer as excessive heat will damage it.
- Supply pipe work must be flushed clean before installation.
- Full installation instructions come with the product.
- Please note: The Graphite and Brushed Nickel finishes used in Arq ii are not a like-for-like match with our other ranges due to the PVD manufacturing process.

Specifications

It is a requirement of State Plumbing Codes that licensed plumbers carry out all tapware installations. All installations should comply with the relevant requirements of AS/NZS 3500 and local plumbing codes.

Pressure:

[1] Maximum Hydrostatic Pressure: 1000kpa. This pressure may be exceeded only under test conditions as per AS/NZS 3500. Where hydrostatic pressure exceeds the maximum stated above, pressure-limiting valves should be installed. [2] Recommended Maximum Hydrostatic Pressure: 500kpa (AS/NZS 3500)

[3] Recommended Minimum Hydrostatic Pressure: 150kpa

Temperature:

Maximum Water Temperature: 80° C. For optimum performance, hot and cold inlet water pressure should be equal.

Care and Maintenance

[1] Product should be inspected for surface damage prior to installation. [2] Cleaning and handling of all finishes must be performed carefully. [3] Clean products using a soft cloth with warm soapy water only. [4] Never use harsh detergents or abrasive cleaners as these will damage the product. [5] Water marks and oil residue can be removed from Matt Finishes with an application of a carnauba wax based non-abrasive polish on a microfibre cloth. [6] Contact with harsh chemicals such as hair dye, hair bleach etc will result in damage to the finish. [7] Tapware should never be installed using acetone silicones. [8] Avoid the use of wax based furniture creams as this can result in a build up of deposits which will detract from the appearance. [9] Damage to finishes arising from improper installation or post installation use or failure to observe the above care and cleaning instructions will void all warranty agreements.

Warranty

Rogerseller tapware, bathroom fittings and sanitary ware are covered by a five (5) year warranty from date of purchase. For full terms and conditions please refer to rogerseller.com.au

Rogerseller Showrooms —

Melbourne

173-177 Barkly Avenue
Burnley VIC 3121
P 03 9429 8888

Sydney

18 Danks Street
Waterloo NSW 2017
P 02 8396 8700

Brisbane

74-76 McLachlan Street
Fortitude Valley QLD 4006
P 07 3251 4333

Concept Stores —

Southern Innovations

(Fishwick ACT)
P 02 6143 2666

Southern Innovations

(Mitchell ACT)
P 02 6129 7666

Southern Innovations

(Albury NSW)
P 02 6022 2777

Routleys Plumbing Innovations

(Malvern SA)
P 08 8291 3000

rogerseller

rogerseller.com.au