



GV051190

vacuuming drawer Gaggenau Expressive series
60 x 14 cm
GV051190

- Three adaptive vacuum levels for optimal food preservation and sous-vide preparation
- Hygienic stainless steel interior for an easy-to-clean and long lasting appliance
- Multiple accessories ensure food freshness and quality, extending shelf life

Highlights

Integrable in 14 cm high niche
Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm
3 vacuuming levels for vacuuming in the chamber, max. 99%
3 vacuuming levels for vacuuming outside the chamber, max. 90%
Automatic connection recognition for vacuuming outside the chamber
Cushioned closing system

Application

Vacuuming for sous-vide cooking.
Vacuuming for fast marinating and flavouring.
Vacuuming for extended storage.
Vacuuming of vacuuming containers outside the chamber.
Vacuuming of liquids in bottles outside the chamber.

Handling

Touch key operation.

Features


Net volume 7 litres.
Capacity load max. 10 kg.
Maximum size of vacuuming bags W 240 mm x L 350 mm.
3 heat-sealing levels for different strengths of bag material.
Sealing bar, non-stick coating, removable.
Safety glass cover, opens automatically after vacuuming.
Raised vacuuming platform, 44 mm, deployable.
Utility space in vacuuming chamber, W 210 mm x L 275 mm.
Membrane for avoiding reflow of liquids during vacuuming outside the chamber.
Drying program for vacuuming pump.

Planning notes

Plan the niche without back wall.
Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.
Drawers installed above a dishwasher need a specific niche.
Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.
Front weight up to 3 kg.
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
Built-in under worktop or in single niche.
The socket can be planned behind the appliance.
Special accessories (order as spare parts):
Part No. 00578813 vacuuming bags, small
Part No. 00578814 vacuuming bags, big.

Connection

Total connected load 0.32 KW.
Connection cable 1.50 m, detachable.

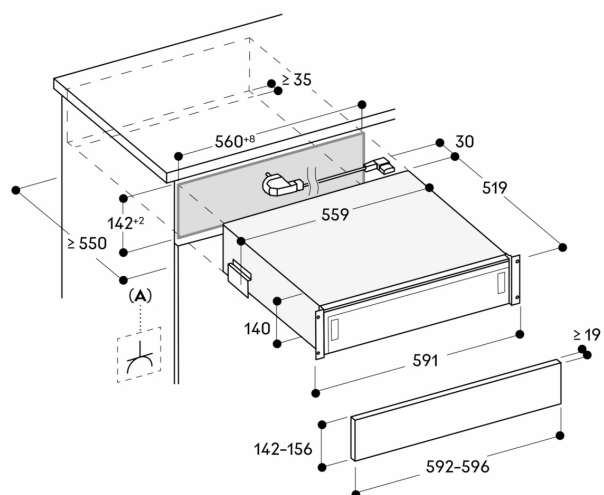

A: Accessible electrical connection

Measurements in mm