

Color Variants

DF250560
fully integrated
Height 81.5 cm

Included accessories

1 x baking tray spray head.

Installation Accessories

GH045010
Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm

DF250560

Dishwasher 200 series

fully integrated

Height 81.5 cm

15 place setting capacity.
6 programmes with aqua sensor and 2 options, Power and Intensive:
Clean and dry dishes in 80 minutes
Intensive cleaning in the lower basket while protecting glassware in the upper basket
TFT display for intuitive handling of all functions
Bright interior lighting
Aqua stop with guarantee

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indications.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Bright interior lighting.
Glass protection.
Aqua sensor.
Load sensor.
Automatic detergent function.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Child lock.
Aqua stop with guarantee.

Programmes

6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Standard Eco 45 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.
2 options:
Intensive.
Power.

Features

Flexible basket system.
Cutlery drawer.
Upper basket:
Rackmatic with 3 levels, adjustable in height up to 5 cm.
2 folding spines.
2 folding racks.
Lower basket:
4 folding spines.
2 folding racks.
15 international place settings
Maximum dish sizes (upper/lower basket)
27/25, 24.5/27.5 or 22/31 cm respectively.
Noise level 40 dB (re 1 pW).

Consumption data

4 Star energy rating, 5 Star WELS water rating
12 L water consumption per wash.
From 0.64 kwh.

Planning notes

Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 8.5 kg.
Door panel dimension dependent on plinth height of kitchen furniture.
For installation into a tall unit, ventilation openings are recommended (min. 200 cm²).

Characteristics

Water consumption (l)
12.0
Built-in / Free-standing
Built-in
Height of removable worktop (mm)
815
Required niche size for installation (HxWxD)
815-875 x 600 x 550
Depth with open door 90 degree (mm)
1150
Adjustable feet
Yes - front only
Maximum adjustability feet (mm)
60
Adjustable plinth
Net weight (kg)
41.9
Gross weight (kg)
44.0
Connection Rating (W)
2400
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50; 60
Length electrical supply cord (cm)
175
Plug type
AU plug
Length inlet hose (cm)
140
Length outlet hose (cm)
190
EAN code
4242006278847

Consumption and connection features

Number of place settings
15
Energy efficiency class (2010/30/EC)
Energy consumption annual (kWh/annum)
Energy consumption (kWh)
0.64
Power consumption in left-on mode (W) - NEW (2010/30/EC)
Power consumption in off-mode (W) - NEW (2010/30/EC)
Water consumption annual (l/annum)
Drying performance
Reference programme
Eco
Total cycle time of reference programme (min)
170
Noise level (dB)
40
Installation typology
Full-integrated

2018-05-31


Page 1

Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

GAGGENAU

Connection dimensions for a 60 cm wide dishwasher

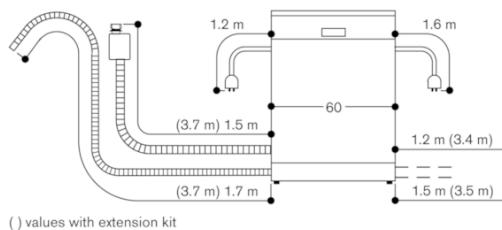

() values with extension kit

81.5 cm high dishwasher

