

iQ700, Wall-mounted canopy rangehood, 90 cm, clear glass black printed, Black LC91KLT65



- ✓ Intelligent hood automatic with sensor – Adjusts extraction based on air quality and cooktop use.
- ✓ iQdrive motor – Delivers powerful extraction, quiet operation, and long-lasting performance.
- ✓ Inclined design – More headroom, clear cooktop view, and efficient steam & odour extraction.
- ✓ emotionLight Pro – Highlight your rangehood with fully dimmable LED lights and a range of colours.
- ✓ touchControl – Simple and intuitive rangehood control at your fingertips.

Color chimney:	Black
Typology:	Wall-mounted
Length electrical supply cord:	130 cm
Height of the chimney:	420-663/457-750 mm
Height of product, without chimney:	450 mm
Minimum distance above an electric cooktop:	600 mm
Minimum distance above a gas cooktop:	650 mm
Net weight:	26.1 kg
Type of control:	Electronic
Number of power settings:	3-stages + 2 intensive settings
Max. ducted extraction:	441 m³/h
Boost position output recirculating:	944 m³/h
Max. recirculation:	437 m³/h
Number of lights:	2
Noise level:	51 dB(A) re 1pW
Diameter of air outlet:	150 / 120 mm
Grease filter material:	Washable stainless steel
EAN code:	4242003908952
Power supply:	250 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	Standard 10 Amp plug
Installation type:	Wall-mounted



LZ11BK116 Clean Air Plus recirculation kit

iQ700, Wall-mounted canopy rangehood, 90 cm, clear glass black printed, Black LC91KLT65

Design:

- Inclined design
- Wall-mounted
- Black glass design
- Suitable for ducted or recirculated extraction
- In recirculation operation use without chimney possible

Features:

- iQdrive: Efficient BLDC technology
- 2, LED, adjustable colour temperature lights
- softLight: the lighting elements switch on and off smoothly.
- Dimming function: the brightness of the lighting elements can be adjusted.
- Colour Temperature: 3500 K
- Light Intensity: 422 lux
- emotionLight Pro
- Powerboost position: Rangehood can be set to a defined extraction boost position in order to increase the catch rate of particularly strong cooking smells and large amounts of steam.
- 2 capture areas: front and bottom
- 3 metal grease filter(s)

Comfort Features:

- climateControl sensor: Automatic Sensor-based performance control for best results
- Backlit touchControl
- 3 power levels + 2 intensive levels
- Automatic reset from intensive to normal setting after 6 min
- Saturation display for filters
- after run automatic: 10 minutes

Digital Features:

- Home Connect: operate, monitor and set preferences of your rangehood via smartphone or tablet.
- cooktop-based rangehood control: automatically activates the rangehood when cooking, thanks to the WiFi connection of the rangehood and a suitable cooktop.
- Voice Control enabled via popular voice assistants
- Customisable Performance Profiles: choose between standard, performance or silence profiles to increase the extraction rate or reduce the fan noise via Home Connect App
- Favourite Button: directly access favourite functions with a configurable button (available with connected Home Connect account).
- Smart home trigger, via Favourite button (available with connected Home Connect account): open up the smart universe from your rangehood (partner service required).
- LED light with adjustable light temperature: Allows you to adapt the light temperature to your personal needs via Home Connect App
- emotionLight Pro with more than 16 million colour options for inspiring illumination via Home Connect App

- Interval function: available via Home Connect App
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Updateable appliance (available with connected Home Connect account): keep appliance always up to date with latest status of software.

Cleaning Comfort:

- Extremely large opening angle for an easy filter accessibility and easy cleaning.
- Easy to clean smooth surfaces and materials
- Easy to clean Innerframe
- Metal grease filter dishwasher-safe

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 228 m3/h ; noise level 35 dB (A) re1pW Speed 2: extraction rate 325 m3/h ; noise level 43 dB (A) re1pW Speed 3: extraction rate 441 m3/h ; noise level 51 dB (A) re1pW Intensive 1: extraction rate 753 m3/h ; noise level 65 dB (A) re1pW Intensive 2: extraction rate 1007 m3/h ; noise level 70 dB (A) re1pW

Performance Recirculation:

- For recirculation operation Clean Air Plus recirculation kit (not included with appliance) needed.
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air plus recirculation kit, for installation with chimney (available as optional accessory): Speed 1: extraction rate 211 m3/h ; noise level 42 dB (A) re1pW Speed 2: extraction rate 315 m3/h ; noise level 51 dB (A) re1pW Speed 3: extraction rate 435 m3/h ; noise level 59 dB (A) re1pW Intensive Speed 1: extraction rate 752 m3/h ; noise level 72 dB (A) re1pW Intensive Speed 2: extraction rate 964 m3/h ; noise level 78 dB (A) re1pW
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air plus recirculation kit, for chimneyless installation (available as optional accessory): Speed 1: extraction rate 214 m3/h ; noise level 42 dB (A) re1pW Speed 2: extraction rate 312 m3/h ; noise level 51 dB (A) re1pW Speed 3: extraction rate 437 m3/h ; noise level 60 dB (A) re1pW Intensive Speed 1: extraction rate 751 m3/h ; noise level 74 dB (A) re1pW Intensive Speed 2: extraction rate 944 m3/h ; noise level 80 dB (A) re1pW

Technical Information:

- Consumption data:
- Power rating: 250 W
- Voltage: 220 - 240 V
- Made in Germany: produced at a CO2 neutral production site
- Expanded plastic free packaging


Planning and Installation Information:

- Dimensions exhaust air (HxWxD): 855-1098 x 890 x 447 mm


- Dimensions recirculating (HxWxD): 892-1185 x 890 x 447 mm
- Dimensions recirculating installation, without chimney (HxWxD): 471 mm x 890 mm x 447 mm
- Simple and weight-reduced mounting thanks to the new easy installation system
- Diameter pipe Ø 150 mm
- Electrical cable length 1.3 m

iQ700, Wall-mounted canopy
rangehood, 90 cm, clear glass
black printed, Black
LC91KLT65


Measurements in mm
Appliance in exhaust air mode

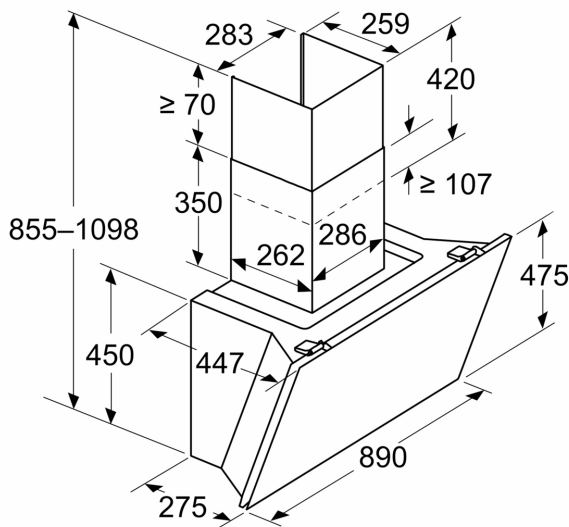

Measurements in mm
Appliance in circulated air mode

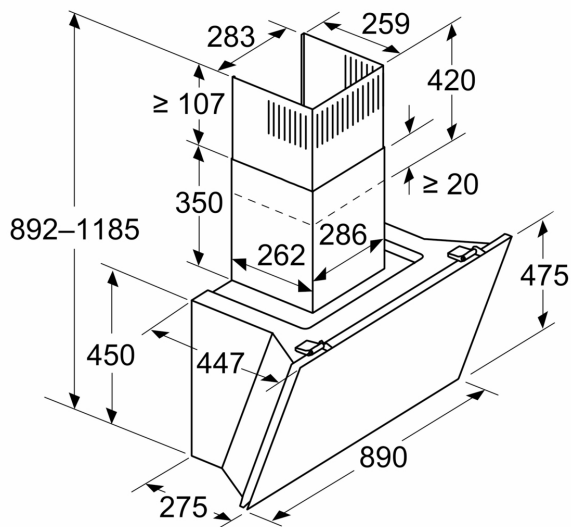


Measurements in mm
Appliance in circulated air mode without duct



Socket can be fitted to the side of or above the appliance

A: Socket only outside the marked area

Measurements in mm

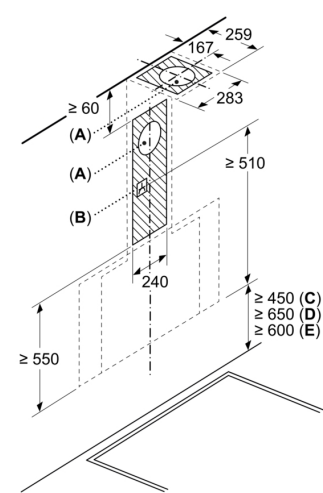

- A: Exhaust-air outlet
- B: Socket
- C: Electric
- D: Gas - from upper edge of pan support
- E: Electric - for Australia and New Zealand

