


iQ300
LB75564P
73 cm Fully integrated rangehood

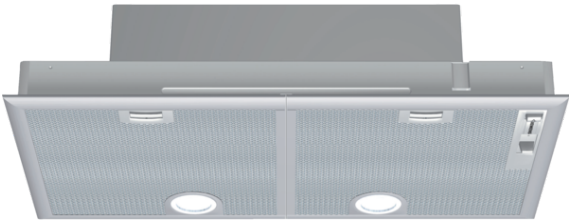

Features

Technical Data

Typology : Traditional
Approval certificates : Australia Standards, CE, VDE
Length electrical supply cord (cm) : 130
Required niche size for installation (HxWxD) : 255mm x 700mm x 350mm
Minimum distance above an electric hob : 650
Minimum distance above a gas hob : 650
Net weight (kg) : 8.970
Type of control : mechanical
Maximum output air extraction (m3/h) : 390
Boost position output recirculating (m3/h) : 430
Maximum output recirculating air (m3/h) : 320
Boost position air extraction (m3/h) : 640
Number of lights : 2
Noise level (dB) : 59
Diameter of air outlet (mm) : 150 / 120
Grease filter material : Washable aluminium
EAN code : 4242003618875
Connection Rating (W) : 240
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : GARDY plug w/ earthing
Installation typology : Built-in

Optional accessories

LZ73050 Charcoal odour filter



iQ300**LB75564P****73 cm Fully integrated rangehood****Features****Power and Mode of Operation**

- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 390 m³/h
- Intensive 640 m³/h
- Suitable for ducted and re-circulating operation

Convenience

- Powerful twin motor
- 3 power levels plus intensive setting
- Sliding switch control controls for power and light
- 2 x halogen lights
- For installation in a modified cupboard, above a hob

Safety and Quality

- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use: 59 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
- Intensive: 69 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- 2 dishwasher-safe metal grease filters

Dimensions (HxWxD)


- Power rating: 240 W
- 120 or 150 mm tube connection diameter

iQ300


LB75564P

73 cm Fully integrated rangehood


Dimensioned drawings

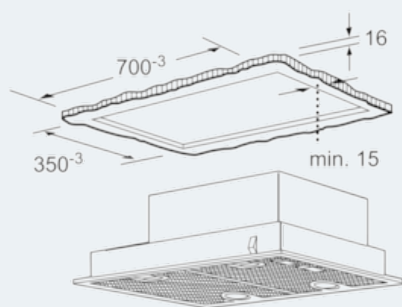

measurements in mm

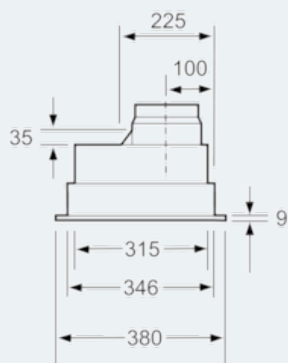

measurements in mm

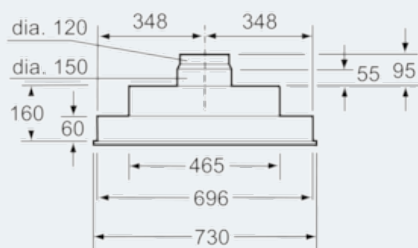

measurements in mm