

RainSelect

Thermostat for concealed installation for 3 functions

Finish: **Matt White** Article Number: **15381700**



Description

product features

- 3 functions
- simultaneous use of several outlets
- Select push-button on/off control for 3 functions
- depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 1 bar: 7,8 l/min
- maximum flow rate at 3 bar: 38 l/min
- flow rate per function: 26 l/min
- flow rate by simultaneous use of all outlets: 38 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- connection type: basic set
- Thermostat is delivered with buttons handshower, PowderRain, shoulder shower

Technology



Certificates / Sustainability




WaterMark

Product image



Scale drawing

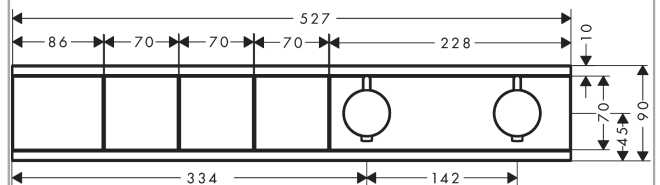

RainSelect
Thermostat for concealed installation for 3 functions
 Finish: **Matt White** Article Number: **15381700**



Installation examples

RainSelect
 1531118X / 15381XXX

