



UM1390-6S, UM1390-9S, UM1390-12S // 60cm, 90cm & 120cm // SILENT



PRODUCT DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 5 Year Warranty on Canopy

TECHNICAL DATA

UM1390-6S

- dimensions: (W x D)
598 x 390mm
- 2 x mesh filters

UM1390-9S

- dimensions: (W x D)
898 x 390 mm
- 3 x mesh filters

UM1390-12S*

- dimensions: (W x D)
1198 x 390 mm
- 4 x mesh filters

ISODRIVE® OPTIONS

- **ST** single external motor
 - 900 m³/h airflow
 - 200mm SteelFlex™ ducting (4m)
 - install roof/wall
 - rated power: 57W
- **SP** single external motor
 - 1600 m³/h airflow
 - 200mm SteelFlex™ ducting (6m)
 - install roof/wall
 - rated power: 155W
- **SE** single external motor
 - 3200 m³/h airflow
 - 250mm SteelFlex™ ducting (4m)
 - 200mm SteelFlex™ ducting (2m)
 - SE accessory kit required
 - install roof/wall
 - rated power: 137W

***Note:** The SE is used only by the UM1390-12S.




Simply discreet and concealed, this most recent addition to Schween's classic range is specially designed for the ultimate extraction of unwanted odours and cooking vapours.

The UM1390 fits deeper into cabinetry than most other undermount rangehoods. Due to its larger extraction zone, this model is simply exceptional in the removal of fats, oils and grease, leaving your kitchen fresher for longer.



UM1390-6S, UM1390-6BS // 60cm // SILENT

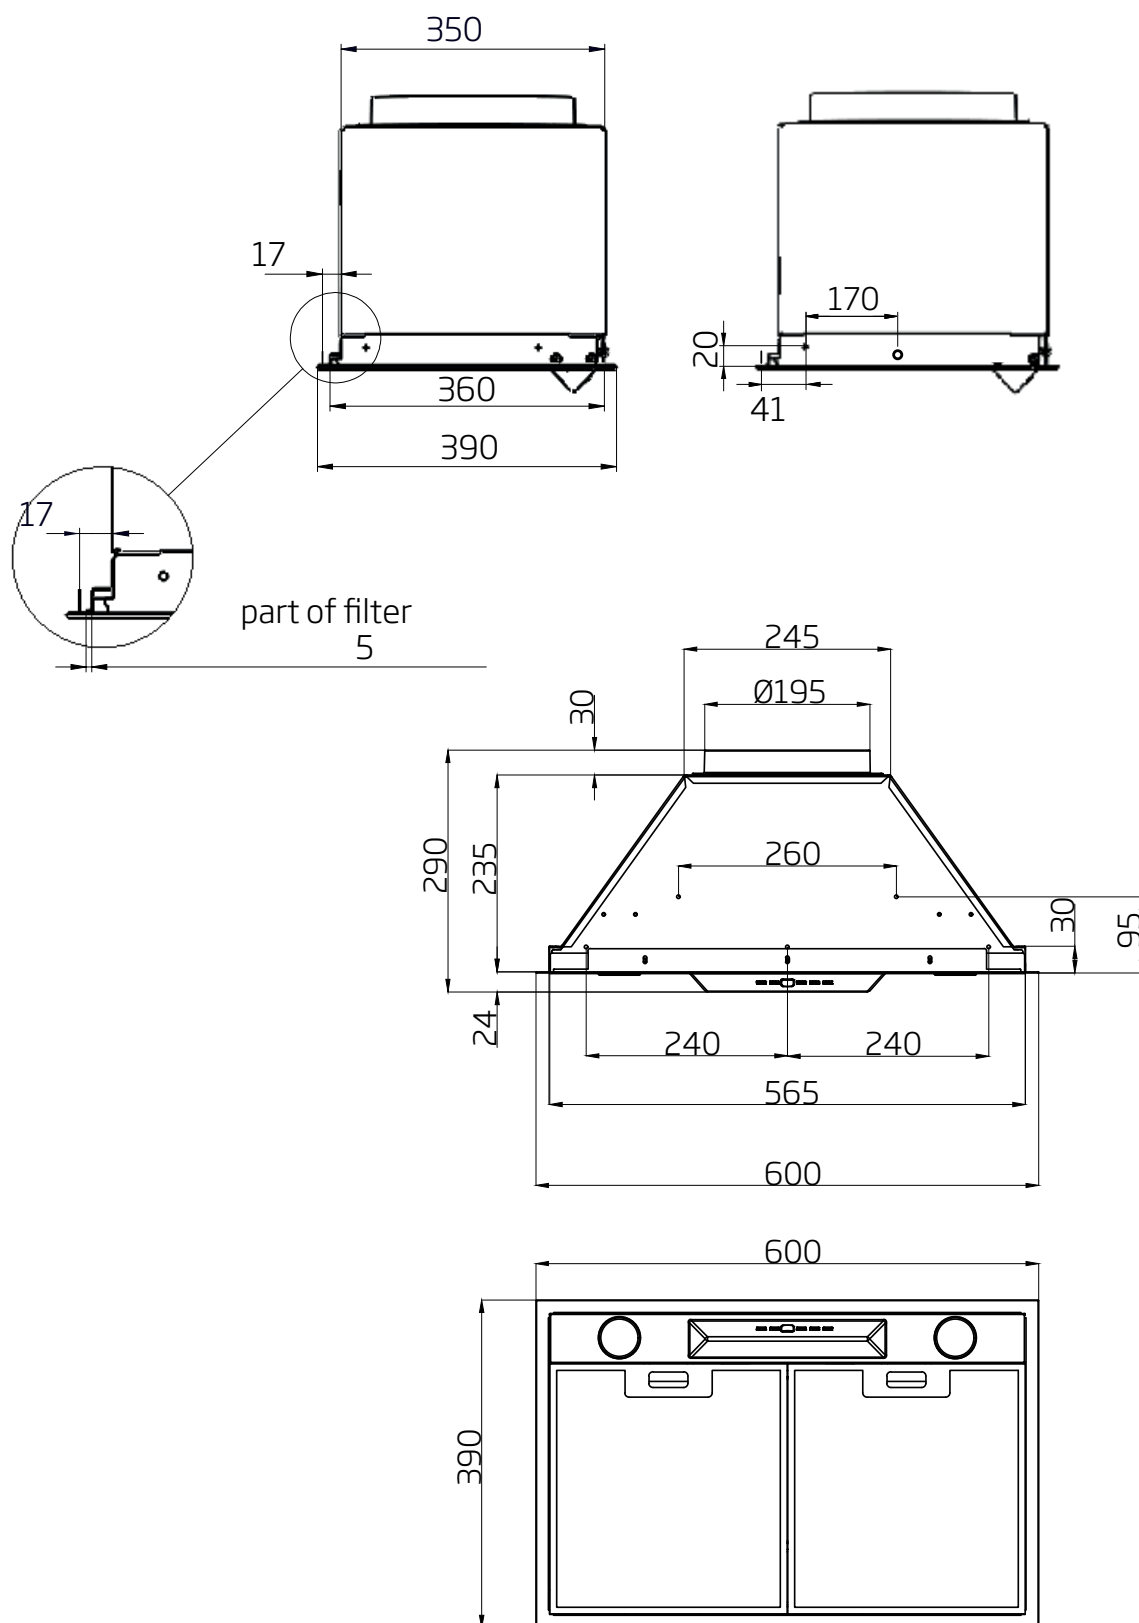


Model: UM1390-6S, UM1390-6BS

Feeding Voltage: 220-240V 50Hz

Max Lamp Power: 2 x 3W



UM1390-9S, UM1390-9BS // 90cm // SILENT

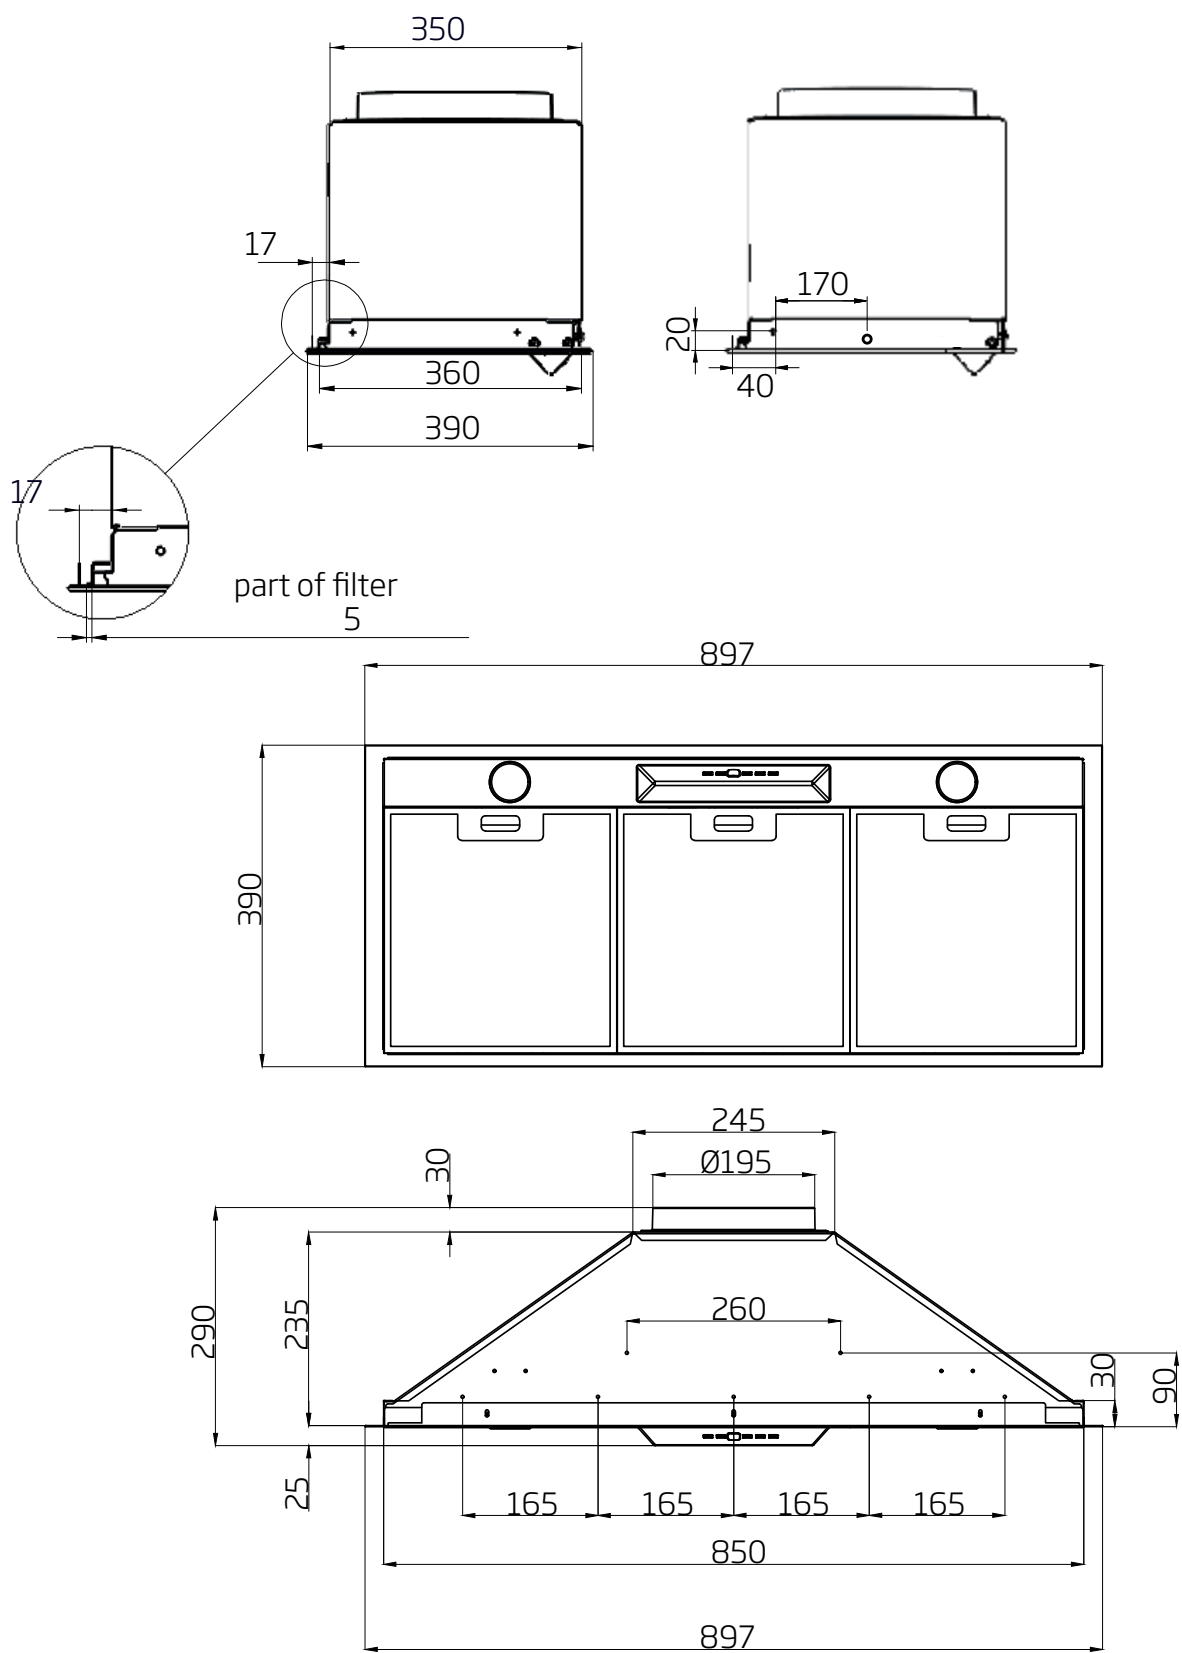




Model: UM1390-9S, UM1390-9BS

Feeding Voltage: 220-240V 50Hz

Max Lamp Power: 2 x 3W



UM1390-12S, UM1390-12BS // 90cm // SILENT

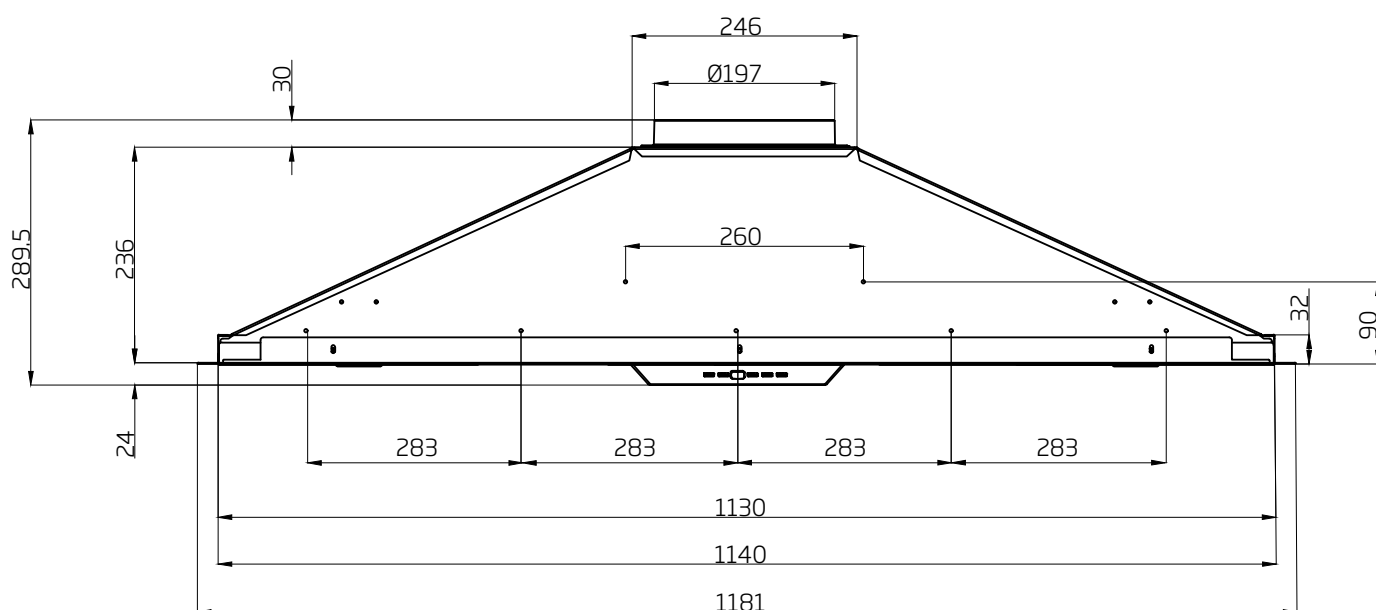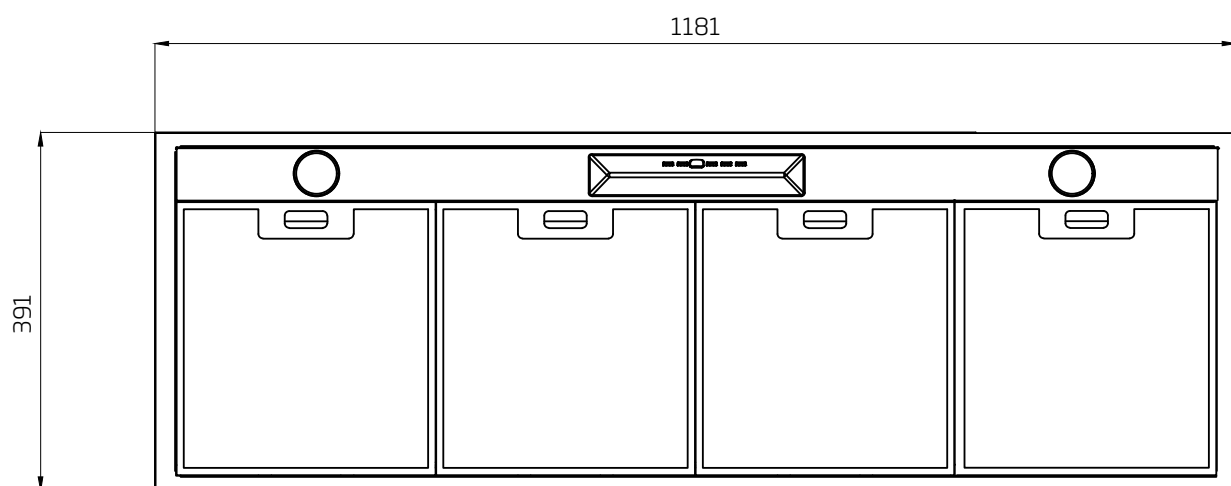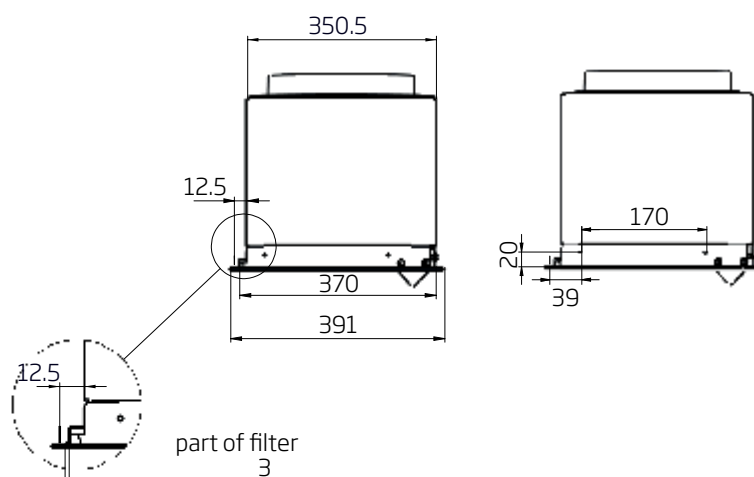

Model: UM1390-9S, UM1390-9BS

Feeding Voltage: 220-240V 50Hz

Max Lamp Power: 2 x 3W