



BX480112

GN340230:

Gastronorm roaster GN 2/3

BA018105:

1 telescopic shelf rail, 76cm/90cm oven

BA028115:

Baking tray, for 76cm/90cm oven

BA038105:

Wire shelf, for 76cm/90cm oven

BA058115:

Heating elem. 230 V, for 76cm/90cm oven

BA058133:

Baking stone for 76cm/90cm oven

BS020002:

Set of 2 pizza paddles

Double oven 400 series

BX480112

- The 3-point core temperature sensor measures precisely the temperature and revises the cooking times as the dish is cooking.
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Pyrolytic cleaning programme heats up to 485 °C
- Pyrolytic system
17 heating methods, with core temperature probe, rotisserie spit and baking stone function
TFT touch display
Electronic temperature control from 30 °C to 300 °C
2 x 110 litres net volume

Heating methods

Hot air.

Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat. Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proving. Defrosting. Keeping warm.

Handling

Rotary knob and TFT touch display operation.

Information key with use indicators.

Side-opening door opens up to 180° angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Rotisserie spit (lower oven).

Baking stone socket.

Actual temperature display.

Rapid heating.

60 W halogen light on the top.

10 W halogen light on the side.

Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

Safety

Thermally insulated door with quadruple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Pyrolytic system.

Gaggenau enamel.

Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.

The door panel surface of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 90° door opening angle.


To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.

The mains socket needs to be planned outside the built-in niche.

Connection

Total connected load 9.2 KW.

Plan a connection cable.

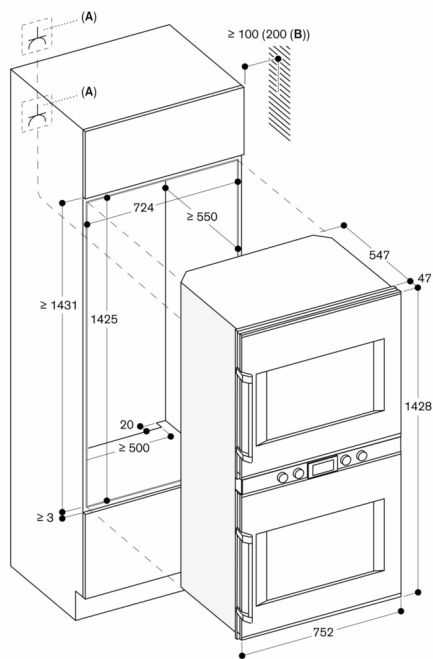

A: Electrical connection
B: 200 mm in conjunction with BA 018
Measurements in mm