


## SHR900X

## smeg 90cm undermount rangehood

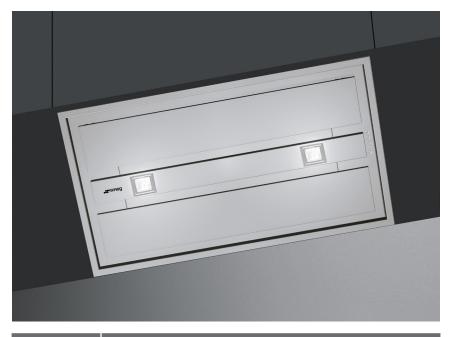

## EAN 9345025000910

finish stainless steel

dimensions  $900 \text{mmW} \times 500 \text{mmD} \times 300 \text{mmH}$ 

installation concealed undermount

motor  $1 \times 250$ W

air extraction duct direct to atmosphere — 150mm diameter ducting

required

**capacity** 830m³/hr (IEC 61591: p=0)

780m<sup>3</sup>/hr (IEC 61591: p=1)

930m<sup>3</sup>/hr intensive

noise rating 46–70 dBA (IEC 607048) illumination 2 X 20W halogen globes

speeds 3 + intensive\*, progressive button

maximum 0.17 amps

current

power supply 220-240V, 50Hz

3-pin plug, 2.1m power cord

supplied 4 x mesh grease filterweight 23.5kg gross, 17kg net


 $p = 0 \rightarrow airflow direct out of motor housing$  $<math>p = 1 \rightarrow airflow after 1m & 90^{\circ} bend + 1m$ 

\*INTENSIVE: the Intensive Speed function activates maximum air extraction for 10 minutes to meet the needs heavy-duty cooking, such as stir-fry.



SHR900X

smeg 90cm undermount rangehood

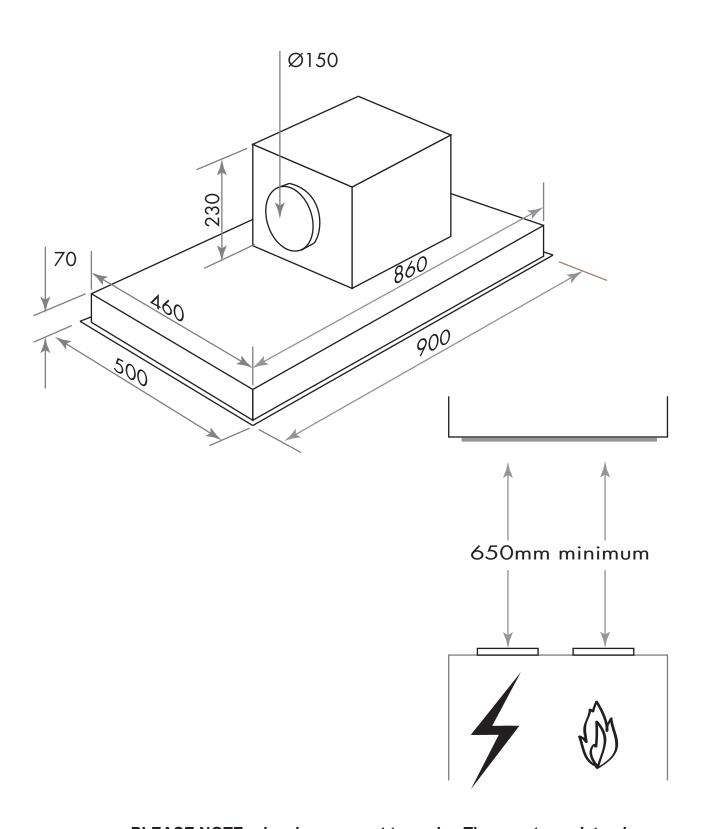

PLEASE NOTE: drawings are not to scale. They are to assist only.