

N 50, integrated rangehood, 52 cm
D55MH56N0A



COOKING PASSION SINCE 1877



Optional accessories

Z5135X3 Standard recirculation kit

- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.

Features

Technical Data

Typology : Built-in/Built-under
Length electrical supply cord : 150.0 cm
Min. required niche size for installation (HxWxD) : 418mm x 496.0mm x 264mm mm
Minimum distance above an electric cooktop : 600 mm
Minimum distance above a gas cooktop : 650 mm
Net weight : 10.7 kg
Type of control : Electronic
Number of power settings : 3-stages + intensive setting
Maximum output air extraction : 575 m³/h
Boost position output recirculating : 606 m³/h
Maximum output recirculating air : 541 m³/h
Boost position air extraction : 650 m³/h
Number of lights : 2
Noise level : 67 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable aluminium
EAN code : 4242004273554
Connection Rating : 277 W
Fuse protection : 3 A
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : AU plug
Installation typology : Built-in



4 242004 273554

N 50, integrated rangehood, 52 cm
D55MH56N0A



COOKING PASSION SINCE 1877

Features

Design & Innovation

- For installation in a kitchen cabinet
- Appliance colour: brushed steel
- Rim ventilation
- metal grease filters with stainless steel cover
- Suitable for ducted extraction and recirculation
- Accessories required for recirculated extraction: Recirculating kit

Features

- Push button controls (3 power levels plus intensive setting) with Electronic display
- Automatic intensive revert setting - 6 min
- Dishwasher safe metal grease filters
- 2 x 1 Watt LED lights
- Light Intensity: 244 lux
- Colour Temperature: 4000 K

Heating Functions


- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use: 575 m³/h
Intensive: 650 m³/h
- Noise level according to EN 60704-3 exhaust air:
Max. normal use: 67 dB(A) re 1 pW
Intensive: 70 dB(A) re 1 pW
- Noise min./max. Normal Level: 53/67 dB
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
Extraction rate in recirculation mode: Max. normal use: 541 m³/h
Intensive: 606 m³/h
Noise level in recirculation mode: Max. normal use: 71 dB(A) re 1 pW
Intensive: 74 dB(A) re 1 pW

Technical Information


- Appliance dimensions (HxWxD): 418 x 520 x 300 mm
- Built-in dimensions: width: 50 cm, depth: 26 cm
- 120 or 150 mm tube connection diameter
- Electrical cable length 1.5 m

N 50, integrated rangehood, 52 cm
D55MH56N0A


Dimensioned drawings



measurements in mm

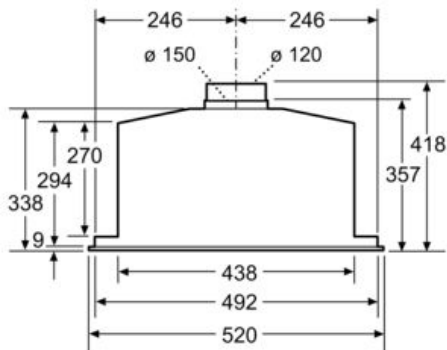

measurements in mm

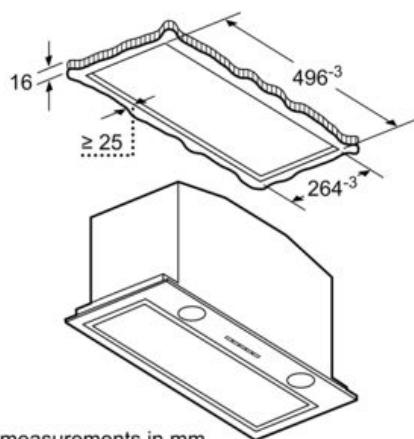

measurements in mm