IWS 3S ThinTop™ + DryDock, 12 THE

SPECIFICATIONS

IWS-3-S-DD-12-S-TT-WA



IWS-3-S-DD-12-S-TT-GT



IWS-3-S-DD-12-S-TT-BA



IWS-3-S-DD-12-S-TT-GR



Exclusive Gray Resin*

IWS-3-S-DD-12-S-TT-WH



Designer White Resin*

Culinary Tools included (CKT-12)







Drying Rack 311 x 457 mm DR-12-U-xx









Mixing Bowl 279 mm 7.2-qt B1-11-0-ST

Specifications

Single bowl Users: 1

Culinary Tools included: Five DryDock Tool included: One Galley Tap recommended: One

Outside dimensions: 1156 x 495 x 73 mm Interior dimensions: 1118 x 457 x 70 mm Countertop cutout: 1118 x 457 mm Minimum cabinet size: 1219 mm

Minimum clearance required for DryDock below countertop: 76 mm

DryDock location: Drain side (S)

Basin (KSO-3-S-DS-12-S-TT-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish

Three tier design

Star™ groove pattern Reversible side drain Drain cover included

Limited Lifetime Warranty Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified

Customize Your Galley

Recommended Basin Accessories & citrine

Disposal Strainer G-DRN-MSS

DryDock Tool included (DR-12)

Bottom Grate set BG-3-S-1-SS Stainless Steel



(1) Lower Tier Drying Rack 311 x 432 mm DR-12-L-xx

800 mm















Upper Deck.

Cover set UD-3-12-3P-WA/GT/BA/GR/WH Walnut, Graphite, Bamboo, Gray or White Resin







(1) 305 mm Included in CKT

Sections Walnut, Graphite, Bamboo, Gray or White Resin



















Strainer M-DRN-MSS



Auto Strainer Angel Finish 304 Stainless Steel with Polished or Matte knob



CIT-09-WD-C



CIT-04-WD-B





IWS 3S ThinTop™ + DryDock 12 THE

SPECIFICATIONS | Right Hand Drain Orientation



Tap Hole Specifications

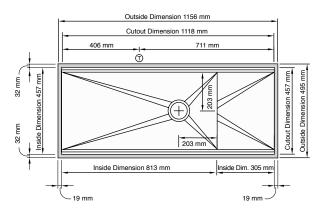




SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 9.5 mm

① Galley Tap 35 mm min to 38 mm max hole diameter
Center Tap hole diameters 51 mm behind cutout
Note: Galley Hot & Cold Tap requires a minimum 203 mm clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email **customercare@thegalley.com** for additional guidance on Tap and Tap Accessory placements

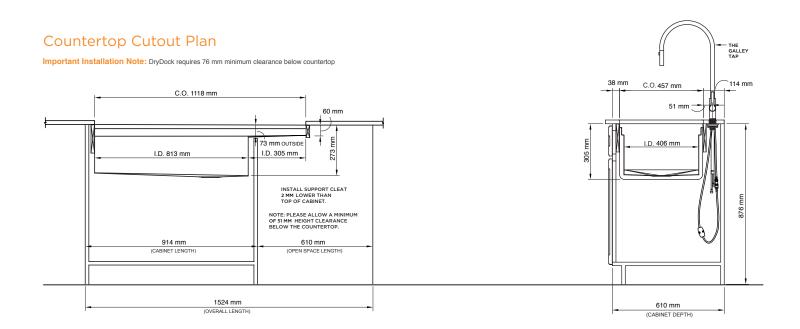

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library


Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255


IWS 3S ThinTop™ + DryDock 12 THE

SPECIFICATIONS | Left Hand Drain Orientation



Tap Hole Specifications

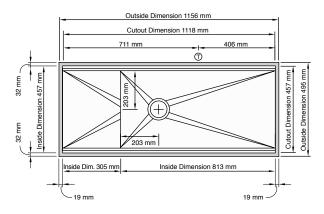




SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 9.5 mm

① Galley Tap 35 mm min to 38 mm max hole diameter
Center Tap hole diameters 51 mm behind cutout
Note: Galley Hot & Cold Tap requires a minimum 203 mm clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

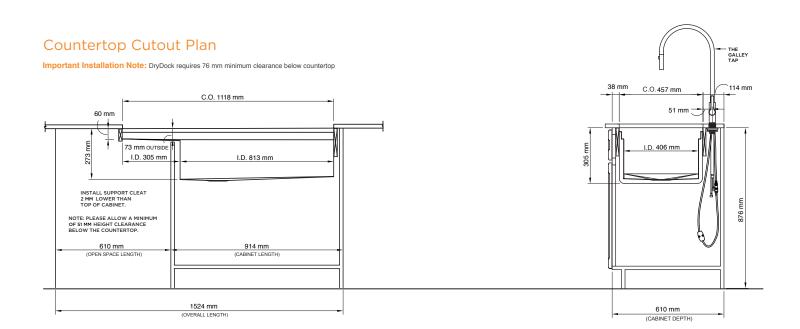

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255