

iQ700, Integrated Design Hood,
90 cm, , Matt black
LJ99BET65



- ✓ climateControl Sensor with cookConnect system – Detects steam and odours and automatically adjusts the extraction level for optimal performance.
- ✓ iQdrive motor – Delivers powerful extraction, quiet operation, and long-lasting performance.
- ✓ Seamless integration – Flush-mounted design for an almost invisible installation within the upper kitchen cabinet.
- ✓ Maximum flexibility – Makes different kitchen cabinet layouts possible.
- ✓ Maximum storage space – T-shaped rangehood design supports up to 10 kg of storage weight on each side.

LZ11IBJ16	Long-life Clean Air recirculation kit
LZ11IBK62	Chimney extension 450-854 mm
LZ11IBN62	Chimney extension 187-360 mm

Typology: Built-in/Built-under
Length electrical supply cord: 130 cm
Required niche size for installation (HxWxD): 340mm x 860.0mm x 300mm mm
Height of product, without chimney: 60 mm
Minimum distance above an electric cooktop: 600 mm
Minimum distance above a gas cooktop: 650 mm
Net weight: 11.1 kg
Type of control: Electronic
Number of power settings: 3-stages + 2 intensive settings
Max. ducted extraction: 426 m³/h
Boost position output recirculating: 705.0 m³/h
Max. recirculation: 423 m³/h
Boost position air extraction: 898 m³/h
Number of lights: 2
Noise level: 57 dB(A) re 1pW
Diameter of air outlet: 120 / 150 mm
Grease filter material: Washable stainless steel
EAN code: 4242003976555
Power supply: 240 W
Voltage: 220-240 V
Frequency: 50; 60 Hz
Plug type: GARDY plug w/ earthing
Installation type: Built-in



4 242003 976555

iQ700, Integrated Design Hood, 90 cm, , Matt black LJ99BET65

Design:

- Installation in a upper kitchen cabinet
- Flush-fitted installation for a seamless integration in upper kitchen cabinets
- Glass panel: grey glass black printed
- Clever Storage Solution: rangehood can hold up to 10 kg on each side
- Suitable for ducted or recirculated extraction

Features:

- iQdrive: Efficient BLDC technology
- 2 x LED 3W with adjustable colour temperature lights
- softLight: the lighting elements switch on and off smoothly.
- Dimming function: the brightness of the lighting elements can be adjusted.
- Colour Temperature: 3500 K
- Light Intensity: 437 lux
- 2 metal grease filter(s)

Comfort Features:

- climateControl sensor: Automatic Sensor-based performance control for best results
- Glass panel with touch control for an easy operation and enhanced steam and vapour capture.
- Kitchen cabinet protection: additional side and rear protection against steam and vapour
- The fan and light are automatically turned on and off by opening and closing the glass panel.
- The light can also be independently turned on and off when the glass panel is closed by quick hand touch on control area.
- touchControl Plus backlit
- 3 power levels + 2 intensive levels
- Saturation display for filters
- Automatic reset from intensive to normal setting after 6 min
- Automatic after running (10 minutes)

Digital Features:

- Home Connect: operate, monitor and set preferences of your rangehood via smartphone or tablet.
- cooktop-based rangehood control: automatically activates the rangehood when cooking, thanks to the WiFi connection of the rangehood and a suitable cooktop.
- Voice Control enabled via popular voice assistants
- Customisable Performance Profiles: choose between standard, performance or silence profiles to increase the extraction rate or reduce the fan noise via Home Connect App
- Favourite Button: directly access favourite functions with a configurable button (available with connected Home Connect account).
- Smart home trigger, via Favourite button (available with connected Home Connect account): open up the smart universe from your rangehood (partner service required).
- LED light with adjustable light temperature: Allows you to adapt the

light temperature to your personal needs via Home Connect App

- Saturation indicator, set and reset function for grease filter and odour filter available via Home Connect app.
- After run function: available via Home Connect App
- Interval function: available via Home Connect App
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Updateable appliance (available with connected Home Connect account): keep appliance always up to date with latest status of software.

Cleaning Comfort:

- Easy to clean smooth surfaces and materials
- Metal grease filter dishwasher-safe
- Coated surfaces to reduce fingerprints

Exhaust/Ducted Mode:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 239 m3/h ; noise level 42 dB (A) re1pW Speed 2: extraction rate 333 m3/h ; noise level 50 dB (A) re1pW Speed 3: extraction rate 426 m3/h ; noise level 57 dB (A) re1pW Intensive 1: extraction rate 744 m3/h ; noise level 71 dB (A) re1pW Intensive 2: extraction rate 898 m3/h; noise level 74 dB (A) re1pW

Recirculation Mode:

- For recirculation operation Long-life Clean Air recirculation kit (accessory) needed
- The Long-life Clean Air odour filter absorbs intense odours, such as fish, as well as pollen. The lifetime can be extended up to 4 times by refreshing the filter in the oven
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Long-life Clean Air recirculation kit (available as optional accessory):
- Speed 1: extraction rate 233 m3/h; noise level 53 dB(A) re1pW
- Speed 2: extraction rate 333 m3/h; noise level 61 dB(A) re1pW
- Speed 3: extraction rate 423 m3/h; noise level 66 dB(A) re1pW
- Intensive Speed 1: extraction rate 634 m3/h; noise level 75 dB(A) re1pW
- Intensive Speed 2: extraction rate 705 m3/h; noise level 77 dB (A) re1pW

Technical Information:


- Consumption data:
- Power rating: 240 W
- Voltage: 220 - 240 V
- Made in Germany: produced at a CO2 neutral production site
- Expanded plastic free packaging
- Available Long-life Clean Air odour filter with extended lifetime up to 4 times
- climateControl sensor: Sensor-based performance control for best results with minimum energy consumption.

Planning and Installation Information:

- Install into a 90cm wide upper kitchen cabinet
- Integrated Design Rangehood comfort installation: easy one -person installation system
- Appliance dimensions (HxWxD): 340 x 898 x 298 mm
- Built-in dimensions (HxWxD): min. 340 mm x 860 mm x min. 300 mm
- Enclosed spacers for installation in upper kitchen cabinets with maximum depth of up to 360 mm
- For installation in higher kitchen cabinets chimney extensions are available as optional accessories
- Diameter pipe Ø 150 mm
- Electrical cable length 1.3 m


iQ700, Integrated Design Hood,
90 cm, , Matt black
LJ99BET65

Measurements in mm
View from above

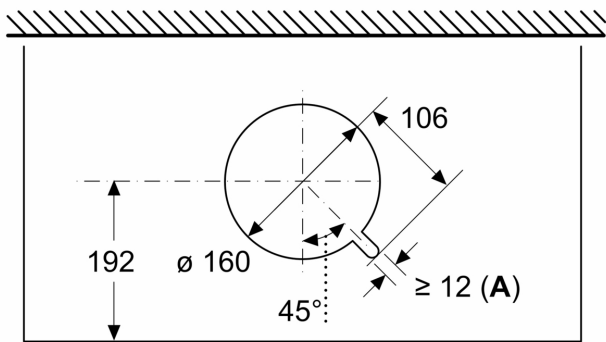

A: Cable bushing


Measurements in mm
Installation example with spice rack

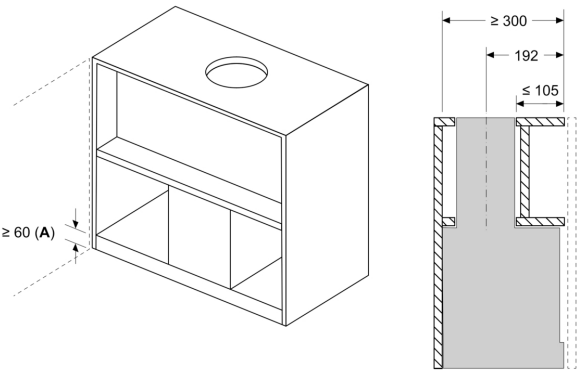

A: Area without hinges

Installation example in cupboards with crossbar, if
installation with chimney extension (other accessories)
not possible

Measurements in mm

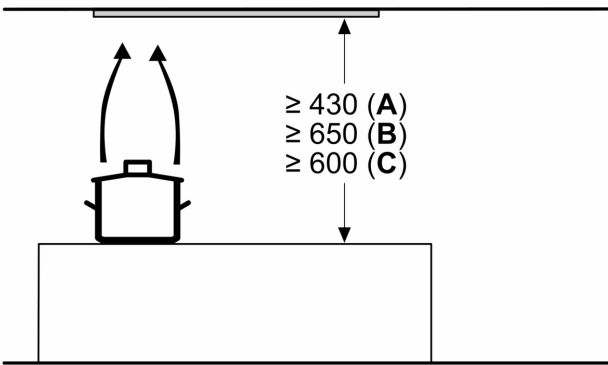


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand


Measurements in mm
Installation requirements for replacement
business




A: Area without hinges

Installation requirements for replacing existing
built-in hood solutions with integrated design
hood without replacing the cupboard


Measurements in mm
Front view

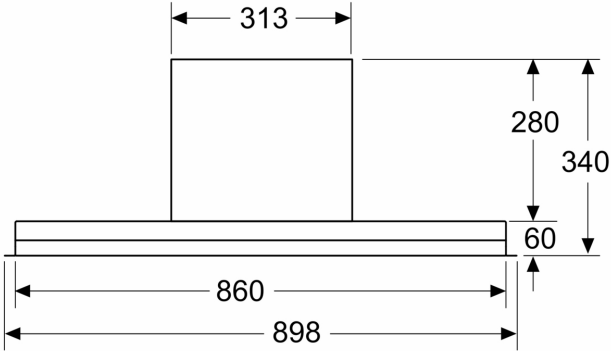

Measurements in mm
Side view

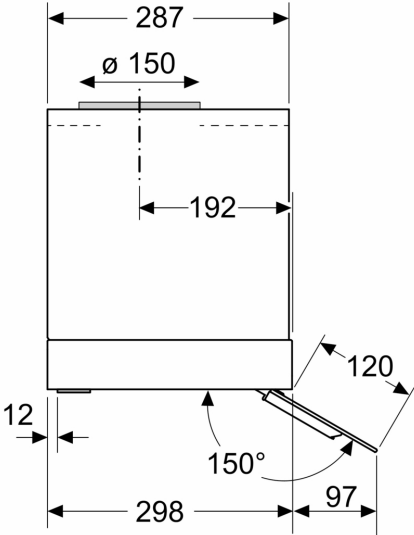


Measurements in mm
Installation example

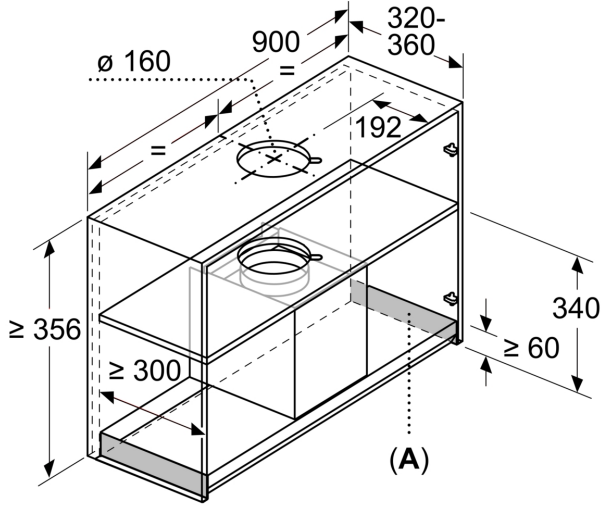

A: Area without hinges

Measurements in mm
Installation example in furniture cut-out

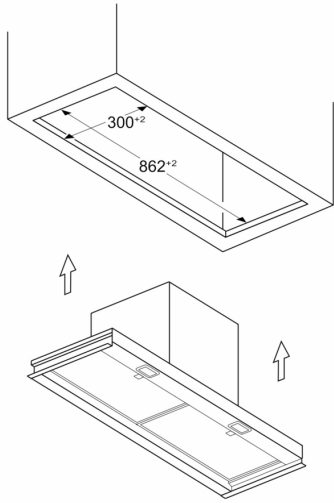

Measurements in mm

