



BMP224100

HEZG9AS00S:
Adapter

Microwave oven 200 series
Door hinge: Right, Gaggenau Anthracite
BMP224100

– Sequential operation of up to 5 modes
including programming of combined
operation and rest time

– Flush installation

Handleless door / automatic door opening

Single operation and combination of microwave
and grill

Sequential operation of up to 5 modes incl.
programming of combined operation and rest time

TFT touch display

Electronic temperature control

Interior volume 21 litres

Programs

Microwave operation with 5 output levels: 900,
600, 360, 180, 90 W.

Full surface grill with 3 levels of intensity,
maximum output 1300 W.

Full surface grill with microwave output levels
360, 180 and 90 W combinable.

10 automatic programs with weight indication:

3 defrosting programs 4 cooking programs 3
combination programs

Option to save individual recipes.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Actual temperature display.

25 W interior light.

Hygienic stainless steel interior with glass
ceramic base.

Safety

Thermally insulated door with double glazing.

Triple door lock.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Planning notes

Door hinge not reversible.

Minimum installation height 85 cm (top edge of
niche bottom).

Height-adjustable feet.

Installation of BMP above BOP with
intermediate shelf.

Necessary lateral gap between appliance door
and furniture panel of min. 5 mm.

The door panel surface of the appliance extends
21 mm from the furniture cavity.


When planning a corner solution, pay attention
to the 90° door opening angle.

Connection

Total connected load 2.0 KW.


Connection cable 1.7 m, detachable.

Installation in an upper cabinet

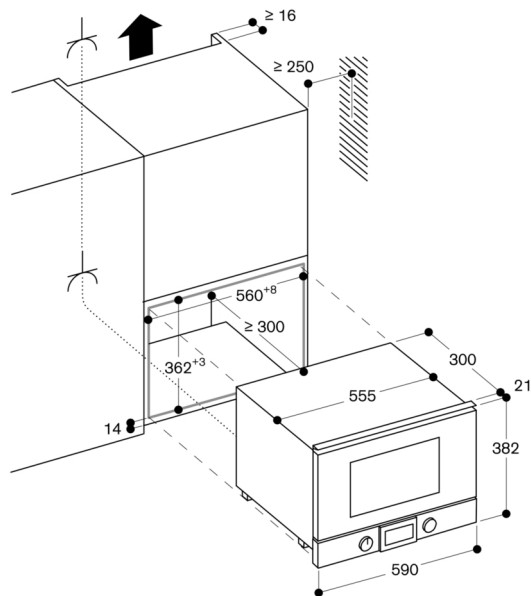

Socket
measurements in mm

Installation in a tall cupboard

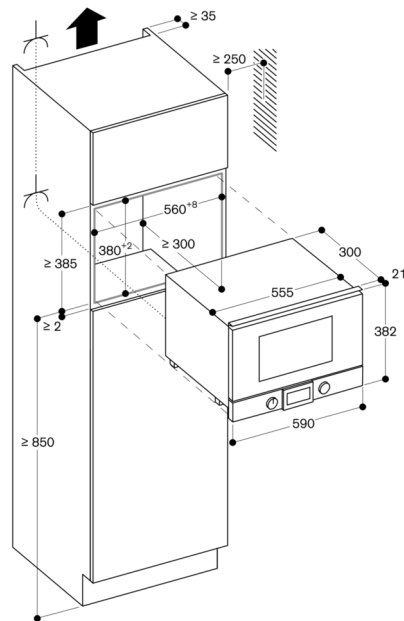

Socket
measurements in mm

Side view of BMP 224/225 over BOP

