



EB333111

**BA018105:**

1 telescopic shelf rail, 76cm/90cm oven

**BA028115:**

Baking tray, for 76cm/90cm oven

**BA038105:**

Wire shelf, for 76cm/90cm oven

**BA058115:**

Heating elem. 230 V, for 76cm/90cm oven

**BA058133:**

Baking stone for 76cm/90cm oven

**BA090100:**

Black rotary knobs for oven

**BS020002:**

Set of 2 pizza paddles

**GN340230:**

Gastronorm roaster GN 2/3

**oven**

90 x 48 cm, stainless Steel

EB333111

- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Automatic programmes
- Pyrolytic cleaning programme heats up to 485 °C

- One-piece front-hinged door with 3 mm precision crafted stainless steel front door panel

Cushioned door opening and closing system

Pyrolytic system

17 heating methods, with core temperature probe, rotisserie spit and baking stone function

Automatic programs

TFT touch display

Panel-free appliance with control module behind glass

Electronic temperature control from 30 °C to 300 °C

Net volume 83 litres

**Heating methods**

Hot air.

Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat.

Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proving. Defrosting. Keeping warm.

**Handling**

Rotary knob and TFT touch display operation.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programs.

Information key with use indicators.

Front-hinged door with 90° door opening angle.

**Features**

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Hot air fan rotates in both directions for ideal heat distribution

Automatic programs.

Rotisserie spit.

Baking stone socket.

Actual temperature display.

Rapid heating.

60 W halogen light on the top.

2 x 10 W halogen light on the side.

Diagonally positioned light sources for optimal interior lighting

Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

**Safety**

Thermally insulated door with quintuple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

**Cleaning**

Pyrolytic system.

Gaggenau enamel.

Heated catalyser to clean the oven air.

**Planning notes**

The door panel surface of the appliance extends 40 mm from the furniture cavity.

The outer edge of the door handle extends 90 mm from the furniture cavity.

For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the upper left side.


**Connection**

Total connected load 5.4 KW.

Plan a connection cable.

Plan a LAN cable.

Please check the user manual for how to switch off the WiFi module.

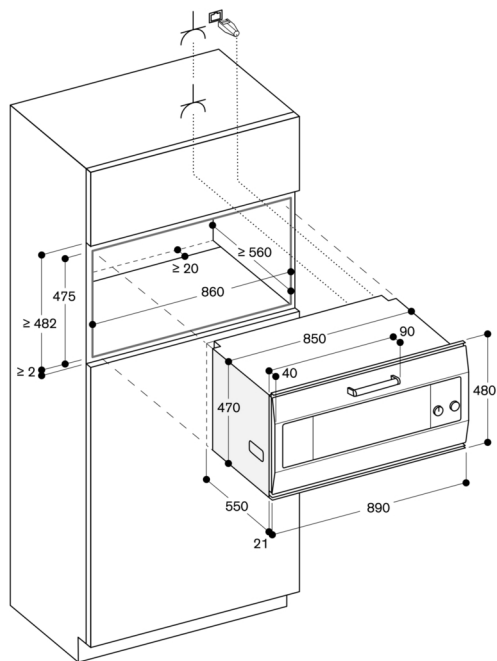

⌘ Socket

measurements in mm