

Art. K052
Multi-function showerhead

- Water functions:
- 1st function: 125 anti - limestone nozzles water flow concentrated in the middle
 - h. 2 mm
 - 30x30 cm
 - check valve
 - flow restrictor 12 l/min at 3 bar
 - ceiling-moun: surface mounted

NOTE: conditions necessary for the correct functioning:
Min. Flow Rate: 9 l/min


NB: to choose the mixer please refer to the pages with shower compositions for each collection

Finishes:

- | | | |
|--------------------------|---------------------------|------------|
| ☐ | Brilliant Stainless Steel | 79 38 K052 |
| ☐ | Matt Black | 79 13 K052 |
| ☐ | Matt White | 79 29 K052 |
| ☐ | Nickel PVD | 79 95 K052 |
| ☐ | Matt Gun Metal PVD | 79 P5 K052 |
| ☐ | Matt British Gold PVD | 79 P6 K052 |
| ☐ | Matt Copper PVD | 79 P9 K052 |
| ☐ | Deep Black PVD | 79 S1 K052 |
| ☐ | Gold Plus | 79 01 K052 |
| ☐ | Brushed Stainless Steel | 79 93 K052 |

12 l/min restrictor

Pressure (bar)	flow rate (l/min)
0,5	6,19
1	12,22
2	11,69
3	11,71
4	12,06

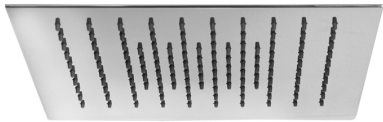

Project:

Room:

Date:

Comments:

