Series 2, Induction cooktop, 60 cm, surface mount without frame
PUG611AA5H



The induction cooktop: fast, safe and energy-efficient cooking that’s easy to clean.

- **Plug-and-play installation**: Fast and easy connection, just plug in into your existing 10-amp socket.
- **Induction technology**: Generates heat directly in the cookware for faster, efficient and safer cooking.
- **TouchSelect Basic**: Easy selection of the desired cooking zone and setting of the power level.
- **Child lock**: Disables the control panel to prevent accidental or unauthorized use.
- **Ceramic glass**: Offers a slim, durable surface that’s stylish and easy to clean.

HEZ32WA00	Wireless food thermometer
HEZ9SE030	Set of 2 pots and 1 pan
HEZ9SE060	6 pieces Set

Product name/family: ..... Cooking zone ceramic
Built-in / Free-standing: ..... Built-in
Energy input: .....Electric
Total number of positions that can be used at the same time: 4
Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
Width of the appliance: .....592 mm
Dimensions (HxWxD): ..... 51x592x522 mm
Dimensions of the packed product (HxWxD): ..... 126x753x608 mm
Net weight: .....9.8 kg
Gross weight: ..... 11.6 kg
Residual heat indicator: .....Yes
Location of control panel: ..... Front
Basic surface material: .....Ceramic glass
Color of surface: .....Black
Length electrical supply cord: .....110 cm
EAN code: 4242005582457
Voltage: ..... 220-240 V
Frequency: ..... 50; 60 Hz

4 242005 582457

Series 2, Induction cooktop, 60 cm, surface mount without frame PUG611AA5H

The induction cooktop: fast, safe and energy-efficient cooking that’s easy to clean.

- 60 cm cooktop: space for 4 pots or pans

Flexibility of cooking zones

- Cooking zone front left: 145 mm, 1.4 KW
- Cooking zone rear left: 180 mm, 1.8 KW (max. power 2.3 KW)
- Cooking zone rear right: 145 mm , 1.4 KW
- Cooking zone front right: 180 mm, 1.8 KW

Comfort & Convenience

- TouchSelect Basic: control the power with imprinted +/- touch buttons.
- 9-stage variable power setting for each cooking zone: precisely adapt the heat with 9 power levels.

Time saving & efficiency

- PowerBoost function in the front left zone: boil water faster with up to 50% more power than at the highest standard level.
- Quick Stop: quickly switch off a cooking zone with one longer touch.

Design

- Frameless: slightly raised installation without metal trim.

Safety


- Childproof lock: prevent unintended activation of the cooktop.
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.

Installation


- Connected load: 2.3 KW
- Dimensions of the product (HxWxD mm): 51 x 592 x 522
- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Power cord 1.1 m cable with plug.

Series 2, Induction cooktop, 60 cm, surface mount without frame
PUG611AA5H

Measurements in mm

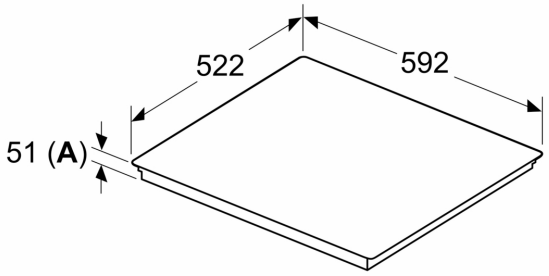

Measurements in mm



C	D	E
585–600	50	≥ 35
> 600	≥ 50	≥ 50


A: Min. distance from the hob cut-out to the wall

B: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm

See space requirements for the oven


The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required

A: Recessed depth

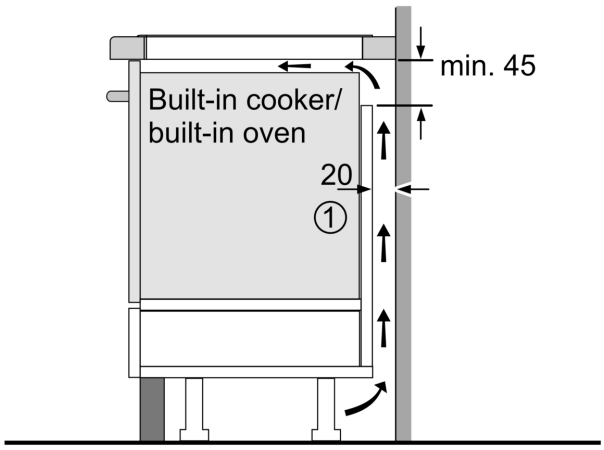


①
Ventilation gap must be present

All measurements in mm

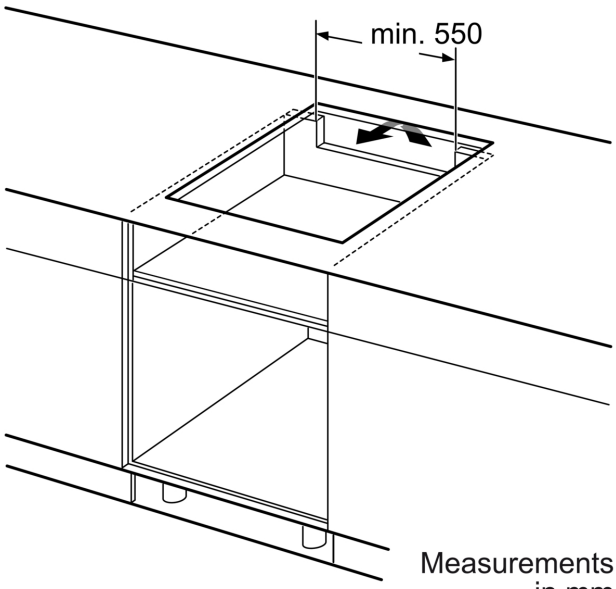

Measurements in mm

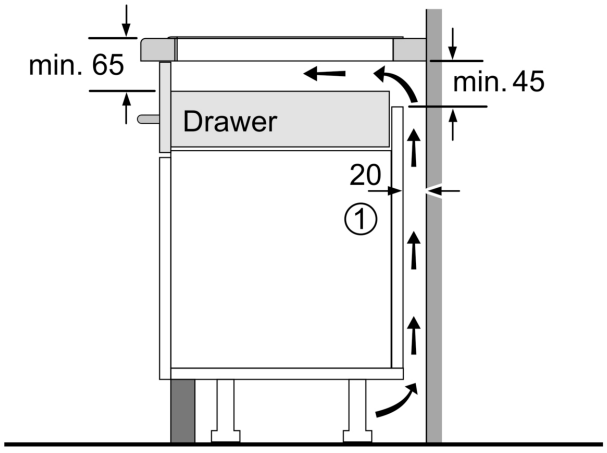

① Ventilation gap must be present.

Measurements in mm