

iQ300
LI67SA530A
60 cm Slideout Rangehood
Metallic silver



Optional accessories

LZ46810	CleanAir active carbon filter
LZ46800	CleanAir Recirculation Kit

The powerful slideout rangehood practically disappears into the upper cabinet.

- ✓ The energy saving LED lighting with dimmer function ensures ambient lighting and optimal visibility when cooking.
- ✓ The highly efficient 740 m3/h extraction rate provides ideal air quality in the kitchen.
- ✓ The intensive setting temporarily increases the extraction rate when kitchen vapour is especially intense, with automatic revert to previous setting after 6 min.
- ✓ 50 dB (330 m3/h) - 150mm ducted.

Features

Technical Data

Typology : Pull-out
Approval certificates : Australia Standards, VDE
Length electrical supply cord (cm) : 175
Required niche size for installation (HxWxD) : 385mm x 524mm x 290mm
Minimum distance above an electric hob : 430
Minimum distance above a gas hob : 650
Net weight (kg) : 11.0
Type of control : Electronic
Maximum output air extraction (m3/h) : 400
Boost position output recirculating (m3/h) : 490
Maximum output recirculating air (m3/h) : 300
Boost position air extraction (m³/h) : 740
Number of lights : 2
Noise level (dB) : 55
Diameter of air outlet (mm) : 150 / 120
Grease filter material : Washable aluminium
EAN code : 4242003769744
Connection Rating (W) : 146
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50-60
Plug type : AU plug
Installation typology : Built-in



iQ300
LI67SA530A
60 cm Slideout Rangehood
Metallic silver

Features

Design & Innovation

- Telescopic comfort installation
- Stainless steel profile handle included
- 2 x 3 Watt LED Lights

Comfort & Convenience

- For installation into a 60 cm cupboard
- 3 power levels plus intensive setting
- low-lift push buttons (3 power levels plus intensive setting) with Electronic display

Power and Mode of Operation

- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 400 m³/h
Intensive 740 m³/h
- Suitable for ducted and re-circulating operation
- Accessories required for recirculation mode: CleanAir Module
- 2 single inlet vertical fans, Efficient BLDC technology
- Intensive operation automatic revert - 6min
- Automatic run on - 10 min

Cleaning

- Dishwasher safe metal grease filters
- Cassette with alu frame

Safety and Quality

- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
Intensive: 68 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- 5 year warranty

Dimensions (HxWxD)

- Power rating: 146 W
- Appliance dimensions (HxWxD): 426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)


iQ300

LI67SA530A

60 cm Slideout Rangehood

Metallic silver

Dimensioned drawings

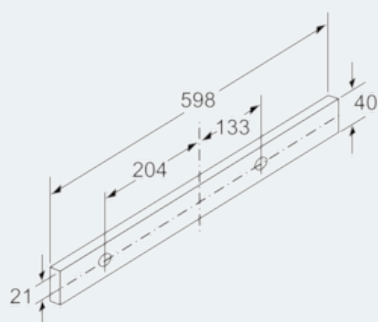

measurements in mm