Series 2, 90 cm, Stainless steel
DWP95BC51A



- **Three power levels**: Flexible extraction to suit everyday cooking.
- **LED lighting**: Energy-efficient, bright, even cooktop illumination.
- **Metal grease filters**: Easy to clean, dishwasher safe design for fresher kitchen air.

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130 cm
Height of the chimney:	553-730/573-730 mm
Height of product, without chimney:	246 mm
Minimum distance above an electric cooktop:	600 mm
Minimum distance above a gas cooktop:	650 mm
Net weight:	9.9 kg
Type of control:	mechanical
Number of power settings:	3
Max. air extraction:	588 m^3/h
Max. air recirculation:	395 m^3/h
Number of lights:	2
Noise level:	67 dB(A) re 1 pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable aluminium
EAN code:	4242005582440
Connection rating:	206 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	Standard 10 Amp plug
Installation type:	Wall-mounted

DHZ5275 Standard recirculation kit

4 242005 582440

Series 2, 90 cm, Stainless steel
DWP95BC51A

Design:
- Pyramid design
- Wall-mounted
- Suitable for ducted or recirculated extraction

Features:
- Efficient capacitor motor
- 2 x LED 2.5W
- Colour Temperature: 3500 K
- Light Intensity: 282 lux
- 3 metal grease filter(s)

Comfort Features:
- Push button controls for power and light
- 3 power settings

Cleaning Comfort:
- Easy to clean smooth surfaces and materials
- Metal grease filter dishwasher-safe


Exhaust/Ducted Mode:
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 257 m3/h; noise level 49 dB(A) re1pW
- Speed 2: extraction rate 464 m3/h; noise level 63 dB(A) re1pW
- Speed 3: extraction rate 588 m3/h; noise level 67 dB (A) re1pW

Recirculation Mode:
- Accessory required for recirculated extraction: Recirculating kit
- According to EN 61591 and EN/ IEC 60704 -2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 196 m3/h; noise level 60 dB(A) re1pW
- Speed 2: extraction rate 364 m3/h; noise level 72 dB(A) re1pW)
- Speed 3: extraction rate 395 m3/h; noise level 73 dB(A) re1pW)

Technical Information:
- Consumption data:
- Power rating: 206 W
- Voltage: 220 - 240 V
- Sustainability:
- Made in Germany: produced at a CO2 neutral production site

Planning and Installation Information:
- Dimensions exhaust air (HxWxD): 799-975 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 900 x 500 mm
- Diameter pipe Ø 150 mm
- Electrical cable length 1.3 m


Series 2, 90 cm, Stainless steel
DWP95BC51A

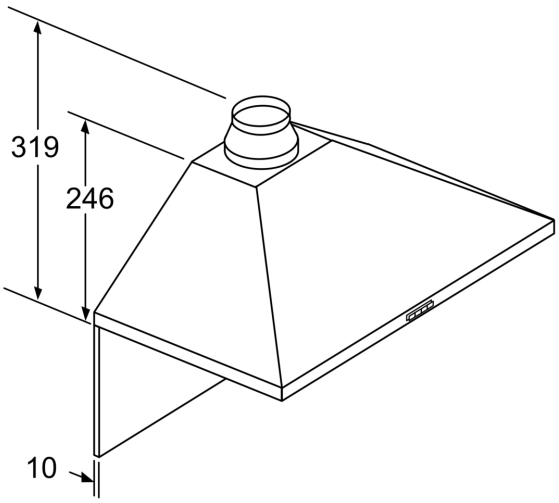

If a back panel is used,
the design of the appliance
must be considered.

measurements in mm

Measurements in mm

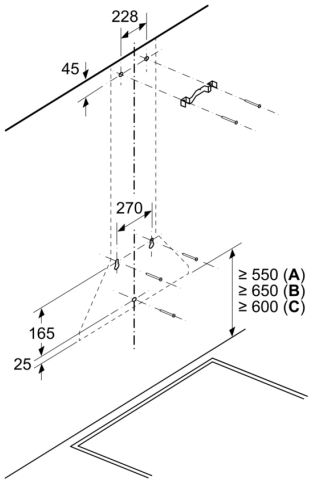


A: Electric

B: Gas - from upper edge of pan support


C: Electric - for Australia and New Zealand

Measurements in mm

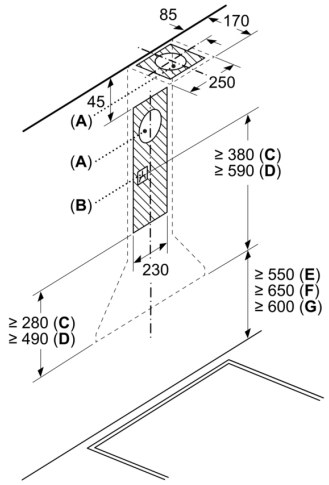

A: Exhaust-air outlet
B: Socket
C: Exhaust air
D: Circulated air
E: Electric
F: Gas - from upper edge of pan support

G: Electric - for Australia and New Zealand

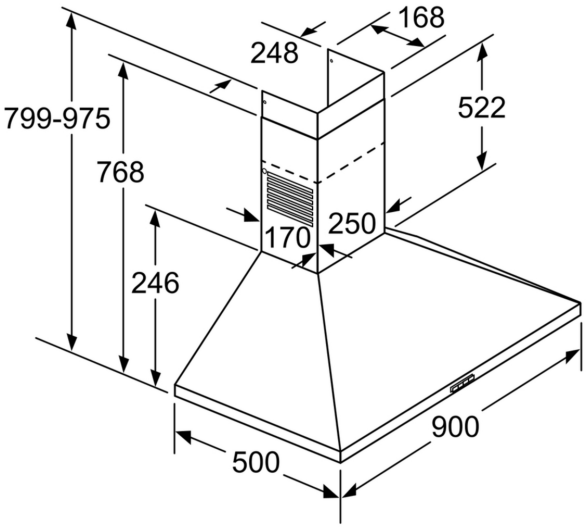

measurements in mm