




PROUDLY AUSTRALIAN OWNED  
DESIGNED & ASSEMBLED IN MELBOURNE



PREMIUM GERMAN MADE  
MOTOR SYSTEMS

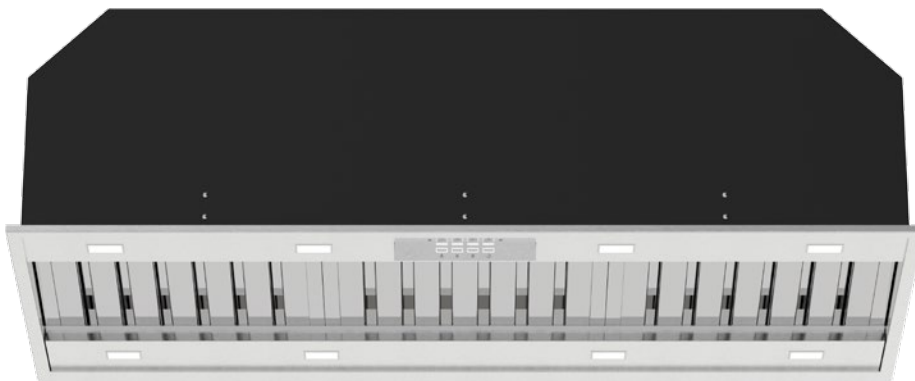

<b>Model Number</b>	X3MM12S
<b>Hood Mounting</b>	Built In (Undermount) - Flush or Proud Install
<b>Cooking Coverage</b>	Suits 100cm - 120cm Cooking Surfaces
<b>Filtration</b>	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
<b>Lighting</b>	LED 8x (Warm White 1.0W) - Front & Rear Panel
<b>Finish</b>	<b>AISI316 1.2mm</b> Marine Grade Stainless Steel
<b>Controls</b>	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
<b>Speed Settings</b>	3 Speed + Boost Mode
<b>Timer Function</b>	Programmable Timer (10min Increments) Auto fan shut off after 2-hours of inactivity
<b>Outlet</b>	Top or Back Duct Outlet
<b>Ducting (Remote)</b>	Dia. 200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied)
<b>Ducting (On Board)</b>	Optional On Board Motor Ducting Kits Available Ultra Motor - Dia. 200mm (Recommended)
<b>Hood Width</b>	1160mm
<b>Hood Depth</b>	<b>480mm</b>
<b>Hood Height</b>	330mm (Top Duct Outlet - Plus 25mm)
<b>Installation Height</b>	700 - 750mm* (Recommended) 600mm* (Minimum)

\* Clearance above the highest point of the cooktop to the underside of hood



## Whispair Endurance Warranty




**5 YEAR WARRANTY**  
COMPONENTS PARTS & LABOUR

**10 YEAR WARRANTY**  
REPLACEMENT PARTS LABOUR

**LIFETIME**  
REPLACEMENT PARTS WARRANTY

## Filtration Zone

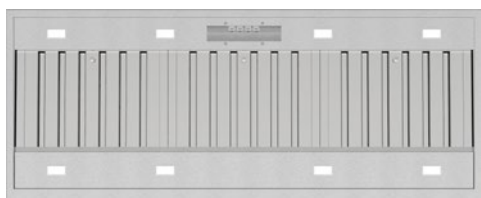

## Your Hood. Your Colour. Your Way.

Available Finishes (Stainless Steel Finish Standard)




## Dimensioned Drawing

Ultra On-Board Motor  
Rectangular Outlet

Top & Rear Outlet Available

Remote Motor Systems  
Ø 200mm Outlet

Top & Rear Outlet Available

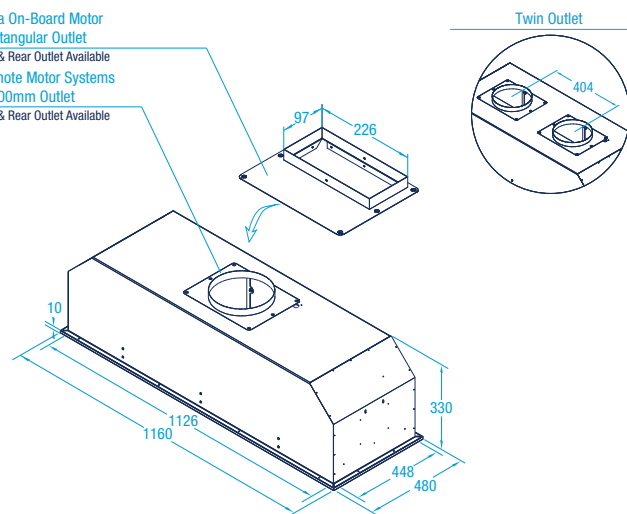

## Available Models - Select Your Motor Solution & Optional Finish

### On Board

X3MM12S6.0U (/T or /B) Ultra 1,680m³/hr (Top or Back Ducted) SPL: 56.5dB(A) In  
X3MM12S6.20U (/T or /B) "Twin" Ultra 1,680m³/hr (Top or Back Ducted)

### Remote External (Roof or Wall Mounted)

X3MM12S5.EP	Pro 1,140m³/hr	SPL: 49.6dB(A) In / 58.5dB(A) Out
X3MM12S5.EPP	Pro Plus 2,010m³/hr	SPL: 56.6dB(A) In / 62.8dB(A) Out
X3MM12S5.2EP	"Twin" Pro 1,140m³/hr	SPL: 49.6dB(A) In / 58.5dB(A) Out
X3MM12S5.2EPP	"Twin" Pro Plus 2,010m³/h	SPL: 56.6dB(A) In / 62.8dB(A) Out

### Remote Inline (Through Wall or Eave)

X3MM12S5.IP	Pro 1,140m³/hr	SPL: 49.6dB(A) In / 58.5dB(A) Out
X3MM12S5.2IP	"Twin" Pro 1,140m³/hr	SPL: 49.6dB(A) In / 58.5dB(A) Out

### Your Hood. Your Colour. Your Way. (Optional Undermount Finish)\*

X1P3.BL	Paint Finish - Satin Black
X1P3.WH	Paint Finish - Satin White
X1P3.CUS	Paint Finish - Custom Colour

\*Additional charges apply