SDD2 L EMTC 1180 1180MM FLUSH DOWNDRAFT HOOD






SDD2 L EMTC 1180

Features and Benefits:

DOWN DRAFT WITH FLUSH FIT DESIGN	Perfect for island installation offering an alternative to bulky island hoods, Modern aesthetic, retractable for unrestricted vision, installed in bench making it versatile for impeded installa-
HIDDEN ALIMINIUM FILTERS	Aesthetically pleasing, Dishwasher safe, Easy to remove, Effective in the removal of odours, Designed to trap grease, Long lasting
INDUCTION COUNTDOWN CONTROL	10 minute auto function used at the end of cooking to reduce condensation build up com-
FULL ELECTRONIC TOUCH CONTROL	Sleek, easy to clean touch controls in toughened glass
SAFTETY SHUTDOWN	Stops unit being damaged due to miss installed filters from obstructing closing mechanism
WARRANTY	3 Years Warranty + 3 Years when Sirius ducting is used. Sirius strongly recommend to use the correct ducting as to not void warranty and to achieve the ideal result
ADJUSTABLE EXTRACTION HEIGHT	Extraction height is adjustable from 150mm to 300mm to suit height of pots used
MULTIPLE VENT OUTLETS	There are several outlet points located on the unit (see above arrows on diagram) for ease and flexibility of install options

SDD2 L EMTC 1180 1180MM FLUSH DOWNDRAFT HOOD



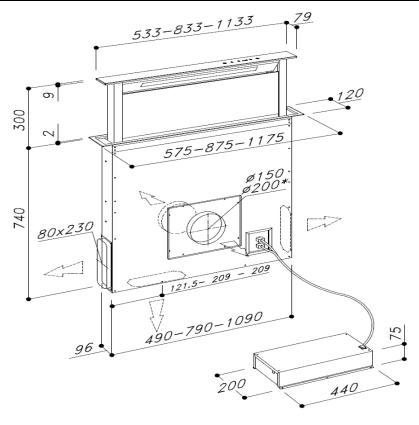

WARNING!

Do not install be-low overhead cup-boards as access if required in the case of a service call. The unit must be accessible to

Technical S	pecifications:
-------------	----------------

MODEL	SDD2 L EMTC 1180
CONTROL PANEL	TOUCH CONTROL
MOTOR	SEM7 SEM8
EXTRACTION	2300m/3h 1650m/3h
DUCTING DIAMETER	200mm 200mm
LIGHTS	1 x FLOURESCENT
FILTER	ALIMINIUM MESH
ELECTRICAL REQUIREMENT	10A
PRODUCT DIMENSIONS	1175 x 120 x 742 + 309
WARRANTY	3 YEARS + 3 YEARS WHEN SIRIUS DUCTING IS USED

WARNING: technical specifications and product sizes can be varied by the manufacturer, without notice. Cut outs for appliances should only be by physical product measurements. The above information is indicative only.