RW464361AU
Vario wine climate cabinet 400 series
fully integrated, with glass door
Niche width 61 cm, Niche height 213.4 cm

- Two independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Stainless steel interior
- Fully extendable bottle trays in beech and aluminium
- Presentation light option
- Low-vibration operation
- Capacity 98 bottles

Color Variants
RW464361AU
fully integrated, with glass door
Niche width 61 cm, Niche height 213.4 cm

Optional accessories
RA093630
Presenters in aluminium for single bottle display (set of 3) for RW 464.
RA492630
Fully extendable shelves in aluminium

Required installation accessories
RA460011
Additional side heating element. Required if appliances are installed handle to hinge or hinge to hinge. Not required if appliances are installed more than 160 mm apart from each other.

Installation Accessories
RA420010
Door lock for RW 414 and RW 464.
RA421611
Stainless steel door panel frame with handle
RA421612
Stainless steel door panel frame with handle
RA425110
Handle bar, stainless steel, long

Handling
Electronic temperature control with digital display.

Technical Features
Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Activated charcoal air filter.
UV-protection.
Rest mode certified by Star-K.
Open-door and malfunction alarm.

Features
Net volume 390 litres.
Capacity 98 bottles (based on 0.75/l standard bottles).
10 fully extendable bottle trays, up to 4 of which for storage of magnum bottles.
Space for max. 13 bottle trays or shelves in aluminium.
Interior lighting with 2 ceiling spots in each climate zone, can be used as presentation light.

Consumption data
Energy consumption 1.02 kwh/24 h.
Noise level 42 dB (re 1 pW).

Planning notes
Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 72 kg.
No transport/operation above 1.500 m sea level.

Connection
Total connected load 0.131 kW.
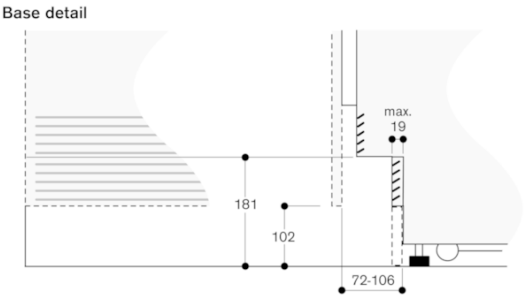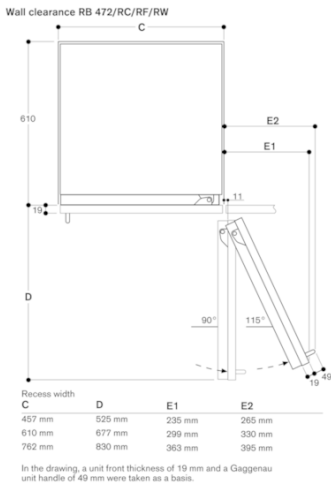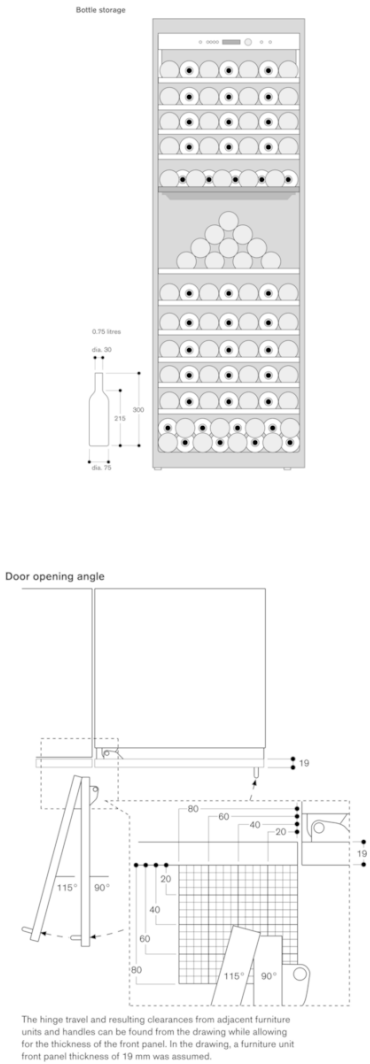Connecting cable 3.0 m with plug.

Characteristics

Built-in / Free-standing
Built-in

Door panel options
Not possible

Height (mm)
2125

Width of the product (mm)
603

Depth of the product
608

Required niche size for installation (HxWxD)
2134.0 x 610 x 610

Net weight (kg)
141.0

Connection Rating (W)
131

Current (A)
10

Interior ventilator
Yes

Voltage (V)
220-240

Frequency (Hz)
50

Approval certificates
CE, KEMA

Length electrical supply cord (cm)
300

Plug type
AU plug

Energy consumption (kWh/d) winecooler
1.02

Energy consumption per Year (kWh/a) winecooler
372.3

Total unit gross capacity (l)
445

Number of compressors
1

Number of independent cooling systems
1

Reversible Door Hinge
Yes

Interior light switch
No

EAN code
4242006219888

Consumption and connection features
Brand
Gaggenau

Product name / Commercial code
RW464361AU

Product category
Winestorage

Energy efficiency class (2010/30/EC)

Energy consumption annual (kWh/annum)

Capacity in 0.75l (bordeaux bottles)
98

Climate class
SN-T

Noise level (dB)
42

GAGGENAU

RW464361AU
Vario wine climate cabinet 400 series
fully integrated, with glass door
Niche width 61 cm, Niche height 213.4 cm

2018-08-23
Page 2

Bottle storage

Base detail

max.
19
181
102
72-106

Based on the standard height of the appliance, the height of the plinth is 102 mm. Maximum thickness of the plinth is 19 mm.

Door opening angle

19
80
60
40
20
19
20
40
115°   90°
60
80
115°   90°

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

Bottle storage

0.75 litres
dia. 30
300
215
dia. 75

Wall clearance RB 472/RC/RF/RW

C
610
E2
E1
11
19
D
90°   115°
19   49

Recess width

C	D	E1	E2
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	363 mm	395 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

GAGGENAU