



## Tumble dryer

T108HW.AU

### Classic

### Series 1

**Capacity: 8 kg**

**Condenser with heat pump**

**Number of programmes: 10**

**Installation: Freestanding**

**Energy stars: 8**

### Construction and performance

- Inner drum: Stainless Steel
- Motor: Asynchronous motor
- Heating system: Heat pump
- Drying types: Sensor or time controlled
- Drum size: 117 l
- Shortest program time: 30 min
- Easy to use lint filter: Yes, Asko double lint filter

### Use and flexibility

- Water tank volume: 6.5 l
- Automatic programs: Yes
- Door opening diameter: 340 mm
- Door maximum opening angle: 180 °
- Sensors: Moisture sensor
- Auto condenser filter cleaning: No
- Load Light™ - Illumination of the drum: No

### Interaction and control

- Remaining time indication: Yes
- Type of display: LCD
- Indication when program is ready: Yes
- Language settings: Chinese simplified, Chinese traditional, Swedish, Slovenian, Slovak, Russian, Polish, Norwegian, Dutch, Latvian, Lithuanian, Japanese, Italian, Croatian, French, Finnish, Estonian, Spanish, English, German, Danish, Czech, US English, Ukrainian, Serbian, Portuguese, AU English

### Programs and options

- Number of programmes: 10
- Drying programs: Auto normal dry, Wool, Time program, Bedding, AirRefresh, Cotton storage, Cotton iron, Sensitive, Synthetics, Mixed laundry
- Settings: Low temperature option, Load level setting, Delayed start, Setting of dryness level, Timed drying, Anti-crease function, Pause, Half load, Beep indicating that program is ended

### Design and integration

- Door hinge placement: Right/Left
- Adjustable feet: 15 mm
- Easy mounting of ASKO dryer on top of the washers: Yes
- Loading type: Front load

### Safety and maintenance

- Child lock on display: Yes
- Overheat protection: For motor and electronics

### Technical data

- Noise level drying dB(A): 63
- Energy stars: 8
- Power consumption in standby mode: 0.39 W
- Consumption in off mode: 0.22 W
- Plug type: AU plug


- Connected load: 700 W
- Voltage (V): 220-240 V
- Number of phases: 1
- Fuse: 10 A
- Frequency: 50 Hz
- Net weight: 52.9 kg
- ISO 14001 certified manufacturing: Yes

#### Dimensions

- Width: 595 mm
- Height: 850 mm
- Depth: 630 mm
- Depth with door open: 1080 mm
- Length of electrical cord: 2100 mm

#### Logistic information

- Packaging width: 636 mm
- Packaging height: 920 mm
- Packaging depth: 743 mm
- Gross weight: 57.4 kg
- Product code: 745833
- EAN code: 3838782957413

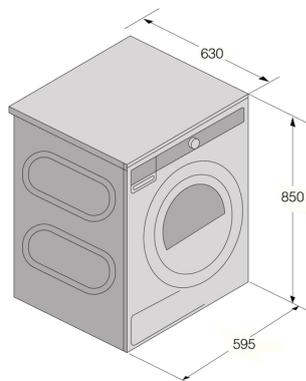

TD76/Sea/Heat pump

