

Serie | 6 Hoods**DFR097E50A**
90 cm Slideout Rangehood

The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

- **Extraction rate:** at 730 m³/h, it quickly ensures optimal kitchen air quality.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting with reset:** automatically resets the hood to regular speed setting after 6 min.
- **Especially quiet:** just 48 dB (320 m³/h / level 2) - 150 mm ducted.

Technical Data

Typology :	Pull-out
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	175
Required niche size for installation (HxWxD) :	385mm x 524mm x 290mm
Minimum distance above an electric hob :	430
Minimum distance above a gas hob :	650
Net weight (kg) :	13.0
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m ³ /h) :	400
Boost position output recirculating (m ³ /h) :	510
Maximum output recirculating air (m ³ /h) :	310
Boost position air extraction (m ³ /h) :	730
Number of lights :	2
Noise level (dB) :	54
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242002965741
Connection Rating (W) :	146
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Half-integrated



Serie | 6 Hoods

DFR097E50A

90 cm Slideout Rangehood

The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

Power and Mode of Operation

- Maximum extraction 730 m³/h
- 3 power levels + 2 intensive levels
- Ducted and recirculated-air operation

Design & Innovation

- Appliance colour: Stainless steel
- Electronic controls with red LED display
- 2 x 3 Watt LED Lights

Convenience

- Intensive operation automatic revert - 6min
- Automatic run on - 10 min
- Additional sound insulation mats for optimised sound absorption
- Noise min./max. Normal Level: 40/54 dB
Noise max. Intensive setting: 65 dB
- SoftLight with dimming function
- Saturation display for filters
- Easy installation system

Cleaning

- Dishwasher safe metal grease filters

Safety and Quality

- EcoSilence BLDC brushless motor
- 2 year warranty

Dimensions (HxWxD)

- Appliance dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm


Technical Information

- Power rating: 146 W
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Accessories required for recirculation mode: CleanAir Module
- Install into a 60cm or 90cm cupboard
- Drawer without handle, furniture lighting pelmet or profile panel (optional accessory) required

Serie | 6 Hoods


DFR097E50A

90 cm Slideout Rangehood

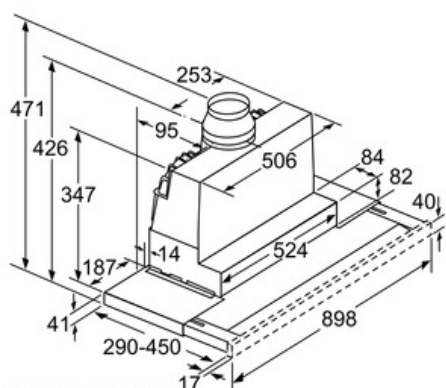


Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

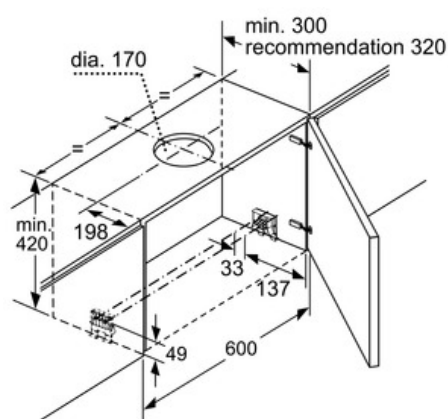


measurements in mm

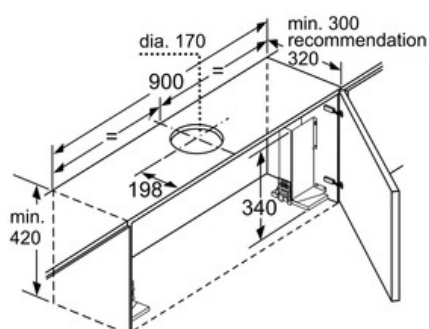


When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.


measurements in mm

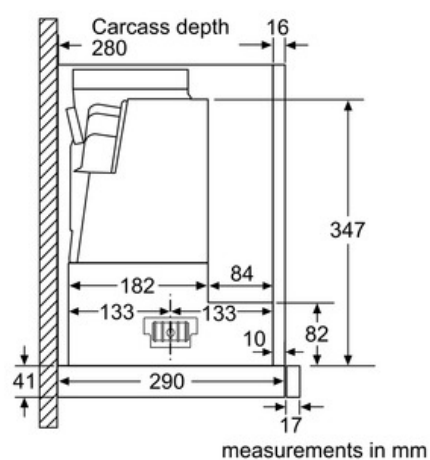

measurements in mm

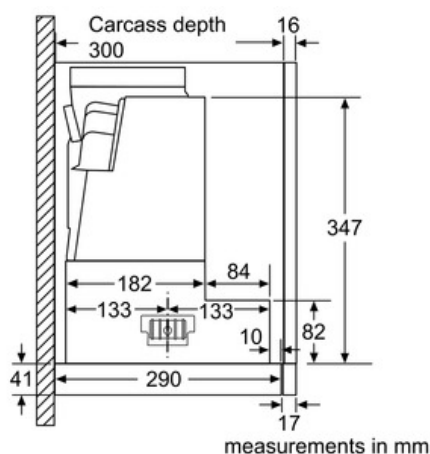

measurements in mm


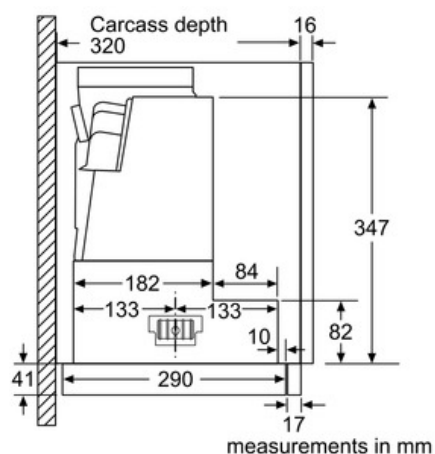


measurements in mm

Serie | 6 Hoods

DFR097E50A

90 cm Slideout Rangehood

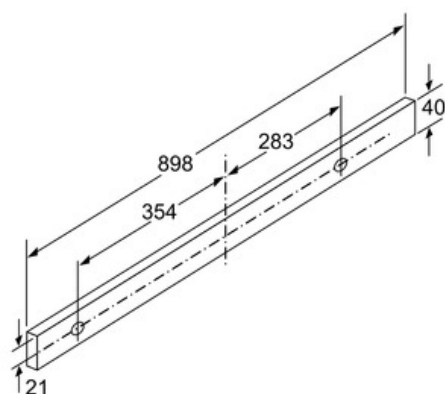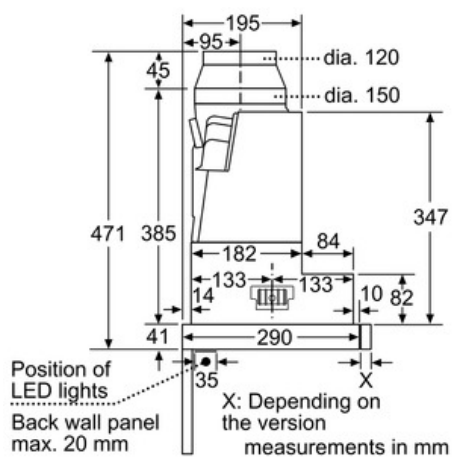

measurements in mm