


EN Assembly instructions

DE Montageanleitung




Logis 110 Fine 2 Tick

71251009

Logis 110 Fine

71253003

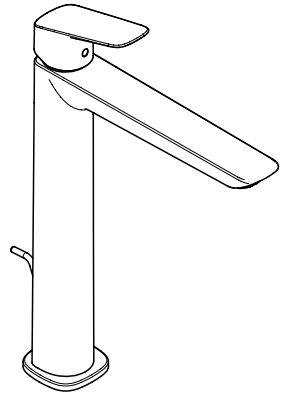

Logis 240 Fine 2 Tick

71257009

Logis 240 Fine

71258003




EN 1717 | EN 806 | DIN 1988



P

max.
1 MPa
(10 bar)

0,1 - 0,5 MPa
(1 - 5 bar)



T

max.
60 °C

< 50 °C



V

71251009 / 71257009




0,1 MPa (1 bar) ≈ 2,4 l/min







0,3 MPa (3 bar) ≈ 3,5 l/min


71253003 / 71258003

0,1 MPa (1 bar) ≈ 3 l/min


0,3 MPa (3 bar) ≈ 5 l/min

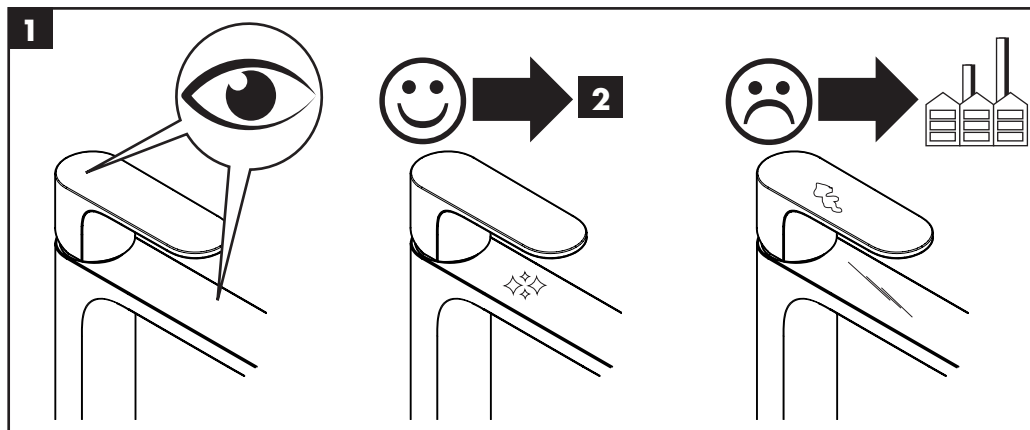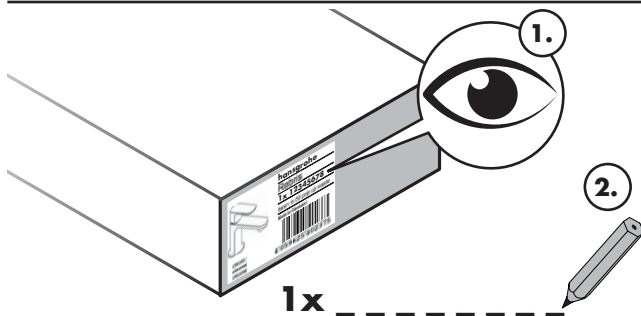

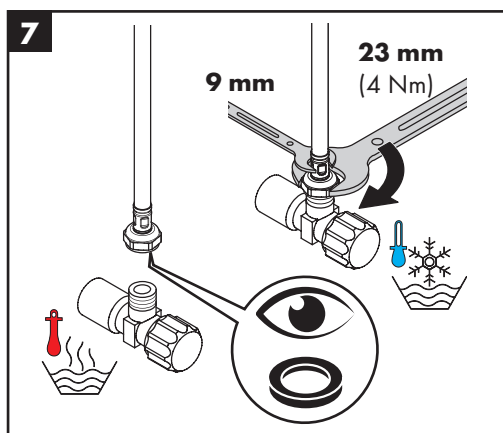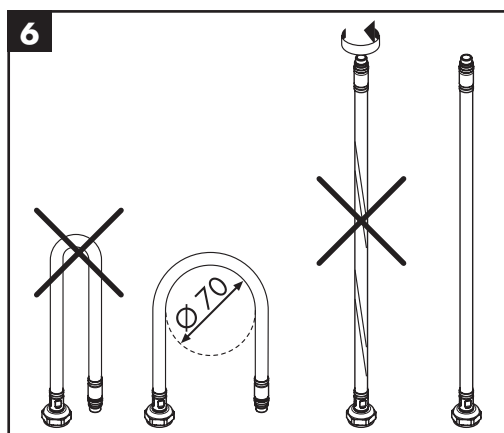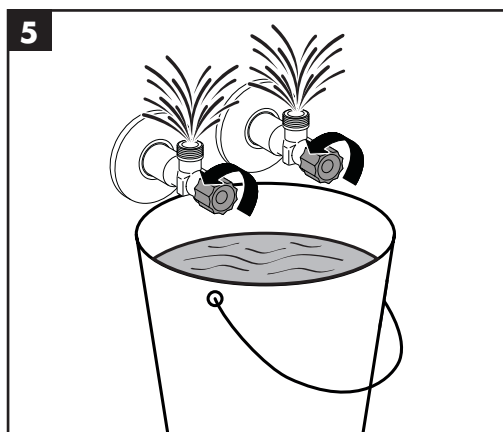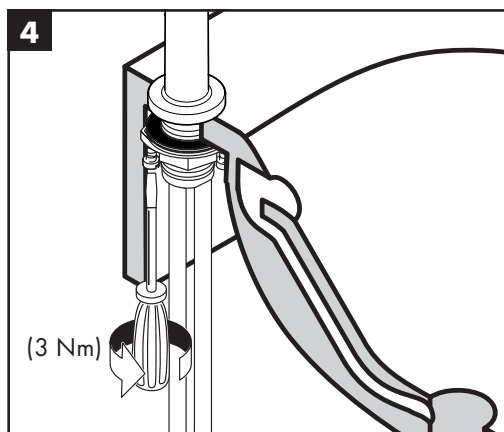
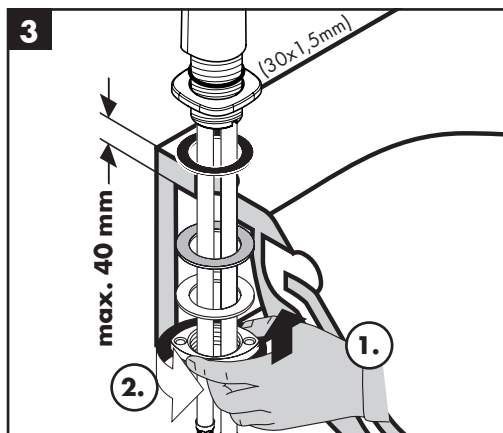
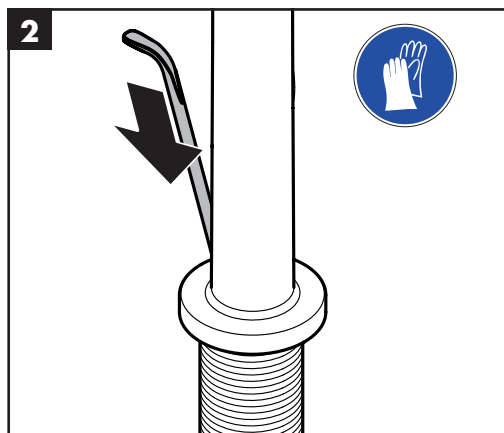


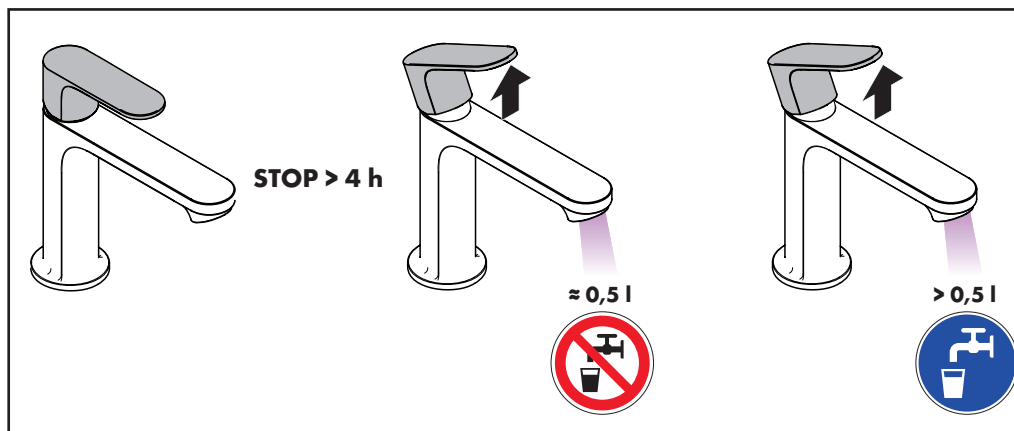

www.hansgrohe.com/search



*www.hansgrohe.com/warranty



hansgrohe

Hansgrohe · Austraße 5 · 9 · D-77761 Schiltach · Telefon +49 (0) 78 36/51-1282 · Telefax +49 (0) 7836/511440
E-Mail: info@hansgrohe.com · Internet: www.hansgrohe.com

08/2025
9,07995,61