



Color Variants

RF463301AU
fully integrated
Niche width 61 cm, Niche height 213.4 cm

Required installation accessories

RA460011
Additional side heating element.
Required if appliances are installed handle to hinge or hinge to hinge. Not required if appliances are installed more than 160 mm apart from each other.

Installation Accessories

RA422610
Stainless steel door panel with handle
RA425110
Handle bar, stainless steel, long

RF463301AU
Vario freezer 400 series
fully integrated
Niche width 61 cm, Niche height 213.4 cm
Left-hinged

Stainless steel interior
Generous lighting concept
Integrated ice maker with fixed inlet water connection
Illuminated dispenser for ice cubes, crushed ice and chilled water
Solid aluminium door racks
Net volume 299 litres

Handling

Electronic temperature control with digital display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Rest mode certified by Star-K.
Open-door and malfunction alarm.

Freezing

No-frost technology with fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 14 kg/24 h.
Storage time after a malfunction 14 h.
4 solid metal shelves, 2 of which are manually adjustable.
2 fully extendable drawers with transparent front, 1 of which large, 1 regular.
Bright interior lighting with light pillars.
1 extra deep door rack.
1 door rack with transparent front flap.

Ice and water dispenser

Illuminated.
Integrated, with fixed inlet water connection.
Can be switched off.
Ice cube production approx. 1.9 kg/24 h.
Ice cubes and crushed ice.
Removable ice storage container with approx. 3 kg capacity.
Ice water supply approx. 1.5 litres.

Consumption data

2.5 Energy Stars
Noise level 38 dB (re 1 pW).

Planning notes

Flat hinge.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 57 kg.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Connection

Total connected load 0.592 kW.
Connecting cable 3.0 m with plug.
Water inlet.
Water pressure 2 to 8 bar.

Characteristics


Thermometer freeze section
Digital
Light
Yes
Product category
Upright freezer
Built-in / Free-standing
Built-in
Door panel options
Not possible
Frost free system
Fridge and freezer
Height of the product (mm)
2125
Width of the product (mm)
603
Depth of the product
608
Required niche size for installation (HxWxD)
2134.0 x 610 x 610
Dimensions of the packed product (HxWxD) (mm)
2260 x 750 x 700
Net weight (kg)
156.0
Gross weight (kg)
171.0
Connection Rating (W)
592
Current (A)
10
Frequency (Hz)
50
Approval certificates
CE, KEMA
Length electrical supply cord (cm)
300
Energy efficiency class
X
Energy consumption (kWh)
Total annual energy consumption (kWh)
Freezing capacity (kg)
14
Door hinge
Left
Storage Period in Event of Power Failure (h)
14
Color / Material body
Defrost process
Warning signal / malfunction
No signal
Lockable door
No
Number of drawers/baskets (Stck)
2
Number of freezing flaps (Stck)
0
EAN code
4242006219833

Consumption and connection features


Brand
Gaggenau
Product name / Commercial code
RF463301AU
Product category
Upright freezer
Energy efficiency class (2010/30/EC)
Energy consumption annual (kWh/annum)
459
Freezer Net capacity (l)
0
Frost free system
Fridge and freezer
Temperature rise time (h)
14
Freezing capacity (kg/24h)
0
Climate class
SN-T
Noise level (dB)
38
Installation typology
N/A

2018-05-31
Page 1



GAGGENAU

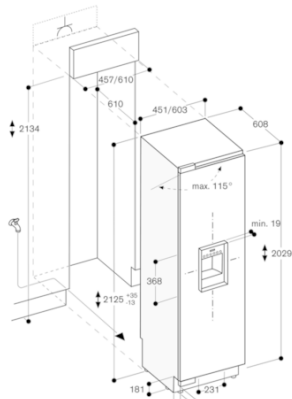


The maximum door panel dimensions are based on a clearance of 3 mm.

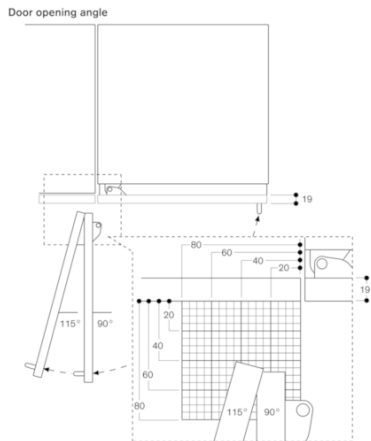

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

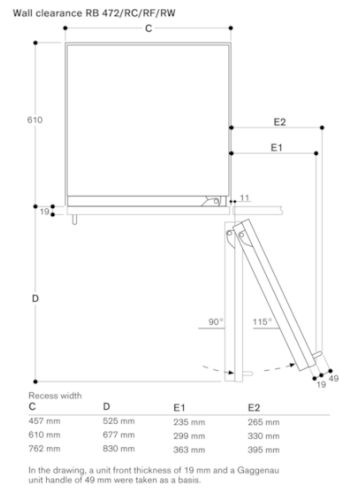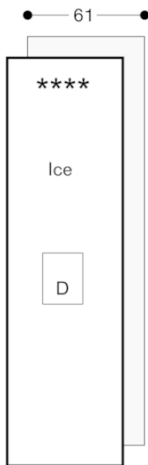

Base detail

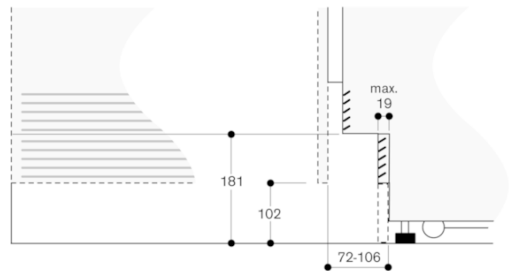

Based on the standard height of the appliance, the height of the plinth is 102 mm. Maximum thickness of the plinth is 19 mm.