


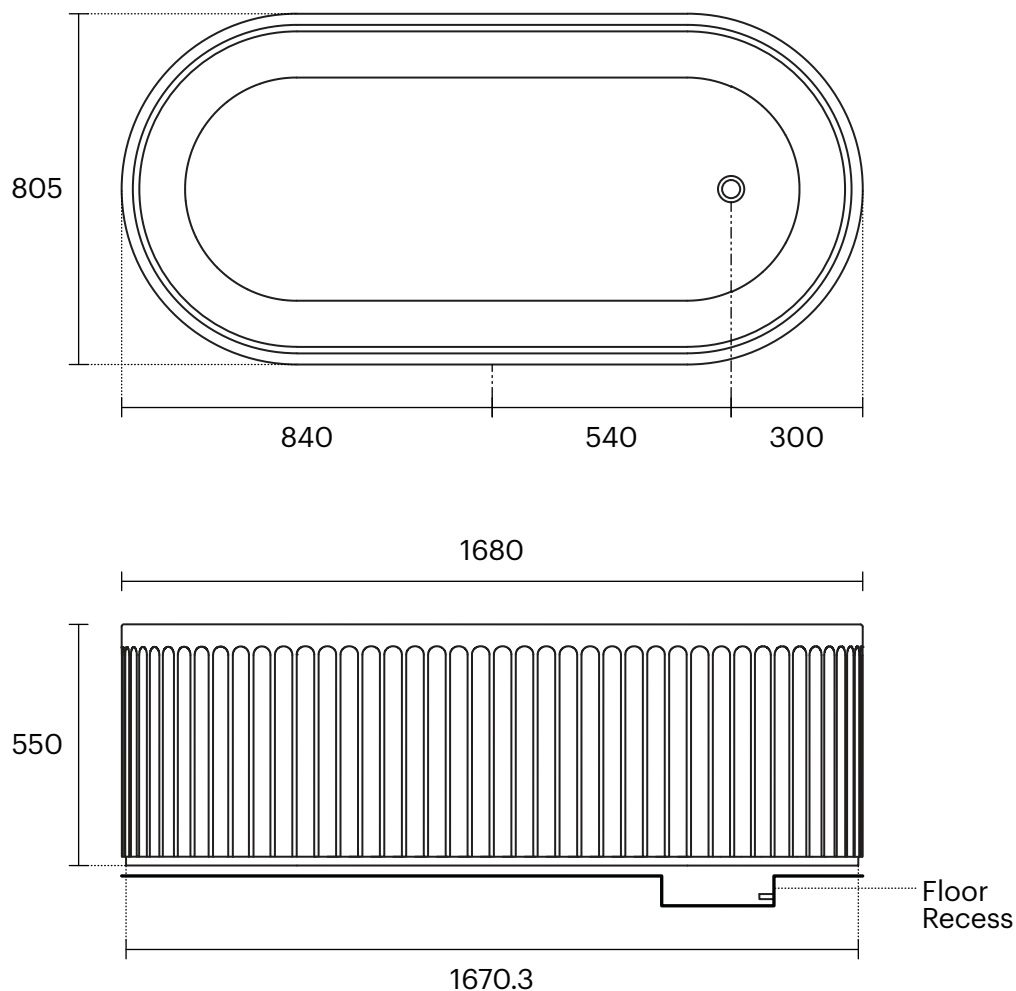

MEEK Doric
1700 Concrete Pill Bath
3368000155 — Off White

Other finishes available.

Please note

- If there is no access to connect a trap to the bath waste, a 40mm PVC expansion joint with a 40mm PVC cap and lining is recommended to be used to connect the bath at final fit-off.
- The bath must be installed on an adequately supported level subfloor.
- The installation must be carried out by two people.
- This bath weighs approximately 295kgs and holds approximately 570lts.
- This is only an installation guide. Rogerseller recommends having the product on-site before commencing rough in.

Please note —
 Dimensions are approximate. Information provided in this technical overview is representative of the actual products available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your product expert prior to purchase. Each product is covered by a limited warranty. Full terms and conditions are available from your product expert.

Specifications

It is a requirement of State Plumbing Codes that licensed plumbers carry out all sanitaryware installations. All installations should comply with the relevant requirements of AS/NZS 3500 and local plumbing codes.

Care and Maintenance

– Concrete

General cleaning: Use a soft cloth such as a microfibre towel with warm soapy water for general routine cleaning. Avoid scours and abrasive cleaners.

Dried and stubborn stains: Dried stains such as toothpaste can be removed with a wet soft cloth. For stubborn stains, a mild non-abrasive, non-acidic cleaner such as Cerapol is recommended. Use such cleaner with a soft cloth without excessively scrubbing the area. It is recommended that any spills from cosmetic and cleaning products are wiped away immediately and not left to dry on the concrete.

Patina through use: With the proper care and maintenance, the concrete will develop a beautiful patina. The surface texture and character makings will become more pronounced giving the concrete a natural worn in look and feel.

– Timber

Avoid placing timber in direct sunlight or close to strong heat sources. Also avoid placing hot or wet items directly on the wood for extended periods of time.

General cleaning: Wipe the wood with a clean, dry cloth. For cleaning, use a soft cloth with water and a general mild detergent.

Stains: For dried stains, a specialty cleaner for painted or 'stained' timber may be used in combination with a soft non-abrasive cloth. Remove soap residue immediately, using a clean, soft cloth. It is recommended that all spills & stains be removed immediately from the surface of the wood.

Warranty

Meek bathroom fittings and sanitaryware are covered by a one (1) year warranty from date of purchase. For full terms and conditions please refer to rogerseller.com.au

Rogerseller Showrooms —

Melbourne

173-177 Barkly Avenue
Burnley VIC 3121
P 03 9429 8888

Sydney

18 Danks Street
Waterloo NSW 2017
P 02 8396 8700

Brisbane

74-76 McLachlan Street
Fortitude Valley QLD 4006
P 07 3251 4333

