

iQ500
ET475FYB1E
40 cm Teppanyaki Plate



Included accessories

2 x spatula

Optional accessories

HZ394301 Connecting strip

The Domino teppanyaki cooktop for preparing light, low-fat dishes the typical Japanese way.

- ✓ The 40 cm wide teppanyaki is ideal for combining with other Domino or faceted design cooktops.
- ✓ touchSlider control allows to control the temperature by entering it directly or by moving the slider with a single finger.
- ✓ Depending on the requirements and quantities the two cooking zones can be heated together or separately.
- ✓ Tastefully integrated into the Domino unit when not in use, thanks to the high-quality glass ceramic cover.
- ✓ Heats to 40°C so that grease deposits can be removed more easily.
- ✓ Easily keeps all dishes at a warm 70°C.

Features

Technical Data

Product name/family : Vario/Domino Teppan Yaki
Built-in / Free-standing : Built-in
Energy input : Electric
Type of control : Electronic
Grill grating material : N/A
Required niche size for installation (HxWxD) : 90 x x
Width of the product (mm) : 392
Dimensions of the product (mm) : 90 x 392 x 520
Dimensions of the packed product (HxWxD) (mm) : 240 x 480 x 610
Net weight (kg) : 10.2
Gross weight (kg) : 12.0
Residual heat indicator : Separate
Basic surface material : N/A
Color of surface : Alu, brushed, Stainless steel
Color of frame : Alu, brushed
Approval certificates : Australia Standards, CE, Eurasian, Ukraine, VDE
Length electrical supply cord (cm) : 100
EAN code : 4242003689127
Electrical connection rating (W) : 1900
Current (A) : 13
Voltage (V) : 220-240
Frequency (Hz) : 60; 50



iQ500
ET475FYB1E
40 cm Teppanyaki Plate

Features

Cooktop Type and Special Features

- Stainless steel frying area
- Dual grill element for full or half size heating
- Controlled temperature range from 160°C to 240°C in steps of 10°

Design

- Black ceramic glass with stainless steel side profiles and beveled front
- Can be combined with Domino cooktops
- Removable black glass lid

Comfort & Convenience

- touchSlider control
- LED display and timer with auto switch off
- Keep warm function
- Special level for cleaning (40°C)
- Count up timer per cooktop
- ReStart - Quickly reinstates previous settings
- 2 spatulas included

Safety and Environment


- Power on indicator light
- Heat up phase display
- 2-stage (h/H) digital residual heat indicator
- Automatic safety switch-off
- childproof lock
- wipeProtection function - Quickly pauses settings to clean as you go
- Energy consumption display

Dimensions (WxD)


- Installation measurements: 360 mmx490 mm
- Length wire connection: 100 cm
- Min. worktop thickness: 30 mm

iQ500
ET475FYB1E
40 cm Teppanyaki Plate

Dimensioned drawings

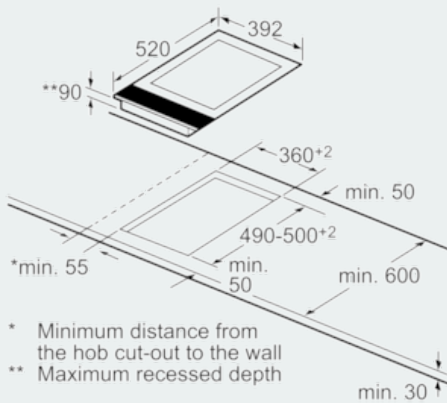


measurements in mm

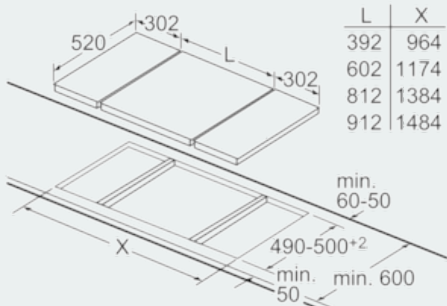


When installing two Domino units right next to a hob, two assembly kits (HZ394301) are required.

measurements in mm

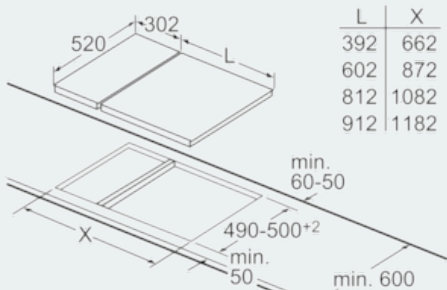

When installing a Domino unit right next to a hob, an assembly kit (HZ394301) is required.


measurements in mm

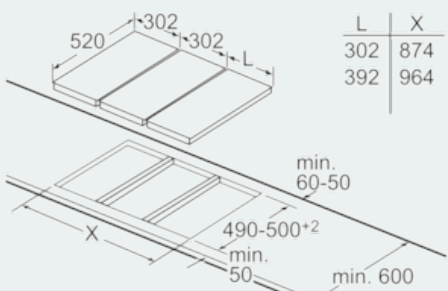

L	X
302	874
392	964

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc).

Measurements in mm

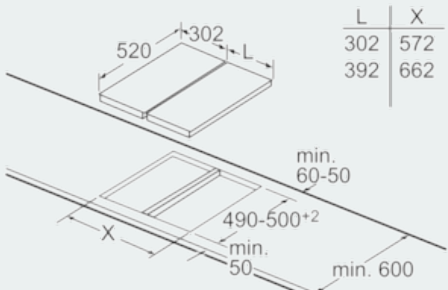


L	X
302	572
392	662

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc).

Measurements in mm

Assembly kit (HZ394301) for Domino

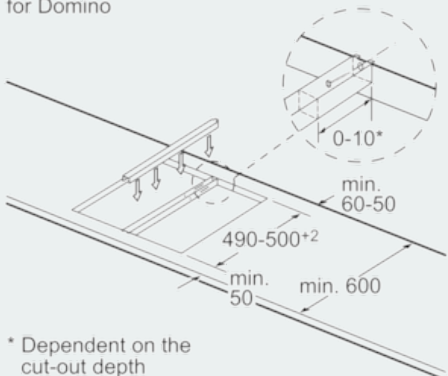


* Dependent on the cut-out depth

Measurements in mm

iQ500
ET475FYB1E
40 cm Teppanyaki Plate

Dimensioned drawings

Picture for the table Domino combination possibilities
with corresponding devices and cutout dimensions

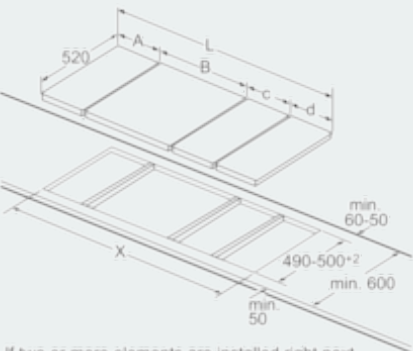

If two or more elements are installed right next
to one another, one or several installation kits are
required (2 elements 1 installation kit,
3 elements 2 installation kits, etc.).

Domino combination possibilities depending on the combination
corresponding appliance and cut-out dimensions

Width type: 30 40 60 70 80 90
Appliance width: 302 392 602 710 812 912 Dimensions in mm

	A	B	C	D	L	X
2x30	302	302	-	-	604	572
1x30, 1x40	302	392	-	-	694	662
1x30, 1x60	302	602	-	-	904	872
1x30, 1x70*	302	710	-	-	1012	980
1x30, 1x80	302	812	-	-	1114	1082
1x30, 1x90	302	912	-	-	1214	1182
2x40	392	392	-	-	784	752
1x40, 1x60	392	602	-	-	994	962
1x40, 1x70*	392	710	-	-	1102	1070
1x40, 1x80	392	812	-	-	1204	1172
1x40, 1x90	392	912	-	-	1304	1272
3x30	302	302	302	-	906	874
2x30, 1x40	302	302	392	-	996	964
2x30, 1x60	302	302	602	-	1206	1174
2x30, 1x70*	302	302	710	-	1314	1282
2x30, 1x80	302	302	812	-	1416	1384
2x30, 1x90	302	302	912	-	1516	1484
1x30, 2x40	302	392	392	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	1296	1264
1x30, 1x40, 1x70*	302	392	710	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	1606	1574
3x40	392	392	392	-	1176	1144
2x40, 1x60	392	392	602	-	1386	1354
4x30	302	302	302	302	1208	1176
3x30, 1x40	302	302	302	392	1298	1266
2x30, 2x40	302	302	392	392	1388	1356
1x30, 3x40	302	392	392	392	1478	1446

* Not possible with 70 cm induction hob