



AW240191

AA200110:

Repl. filter for AA200812/816, AA010810

AA200112:

Activated charc. filter for AA200812/816

AA200812:

Recirculation module w.active charcoal

AD200392:

Ceiling Collar Stainless Steel Wall

Wall-mounted hood 200 series 90 cm, Stainless steel

AW240191

- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Energy saving low-noise fan
- Perforated stainless steel grease filters with high grease absorption rate
- Stainless steel hood with glass cover fitting to oven 200 series

Highly efficient vapour collection by recessed filters

Energy-saving, low-noise fan

Perforated sheet metal filter with high grease absorption

Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Dimmable, neutral white LED light for ideal illumination of the whole cooktop

Air extraction or air recirculation system

Output

Air extraction:

618 / 971m³/h.

64 / 73 dB (A) re 1 pW.

Air recirculation:

383 / 476m³/h.

69 / 74 dB (A) re 1 pW.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Perforated sheet metal filter, dishwasher-safe.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 3 x 3W LED lights.

Illuminance 551 lx continuously dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Airflow-optimised vapour collection area with slightly inward facing filters.

The package includes an one-way flap.

Easy mounting system for simple installation and alignment.

Consumption data

Energy consumption 45.1 kWh/year.

Sound level min. 44 dB / max. 64 dB normal mode.

Planning notes

The package includes the two-part chimney with the dimensions from 572 mm to 874 mm.

Individual planning solutions can be implemented using the special accessory chimney extension AD 200 322 or by shortening the lower edge of the inner chimney.

The equivalent ducting length to ensure good performance is L_{max} 26 m.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

The air recirculation module with activated charcoal filter can be installed on the inner chimney.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection


Total connected load 269 W.

Connecting cable 1.3 m with plug.

Power consumption standby/display off 0.5 W.


Please check the user manual for how to switch off the WiFi module.

AW 240 with AA 200 812

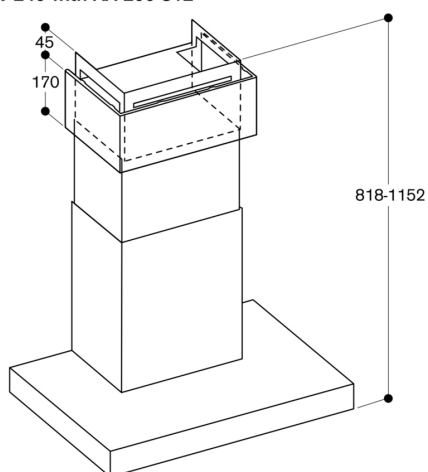


* Suitable for ceiling heights from 2.45 m to 2.75 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.

AW 240 with AD 200 322

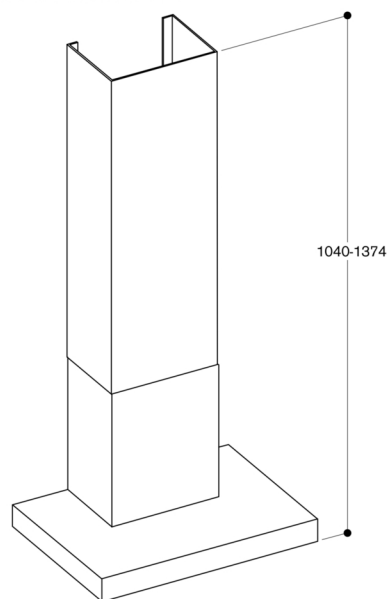

* Suitable for ceiling heights from 2.64 m to 2.97 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.

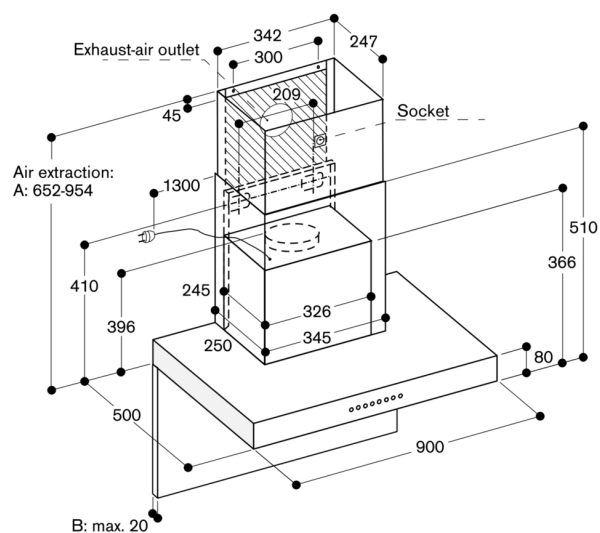

A: Suitable for ceiling heights from 2.25 m to 2.55 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.
B: Note the maximum thickness of the back panel.