


Yarrow with Rinse

AUSH.4346

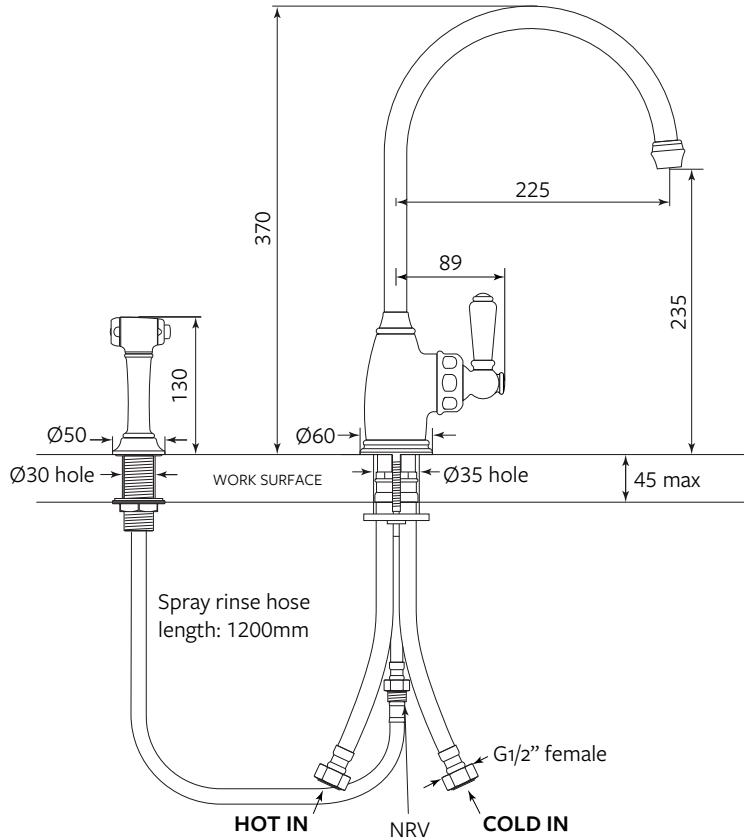

MODEL	CODE
Yarrow with Rinse - Chrome	AUSH.4346CPWPC-3
Yarrow with Rinse - Nickel	AUSH.4346NIWPC-3
Yarrow with Rinse - Pewter	AUSH.4346PFWPC-3
Yarrow with Rinse - English Bronze	AUSH.4346EBWPC-3
Yarrow with Rinse - Satin Brass	AUSH.4346SBWPC-3
Yarrow with Rinse - Polished Brass	AUSH.4346BRWPC-3
Yarrow with Rinse - Gold (special order)	AUSH.4346IGWPC-3

Also Available: Yarrow (AUSH.4341) non spray-rinse model.



Features include:

- Handcrafted in the United Kingdom using premium low-lead brass
- Separate bench-mounted insulated spray rinse tap with 1.2m flexible hose
- White porcelain handle with Shaws insignia indice
- 1/4 turn German ceramic disc flow control
- Vernier insert for accurate handle alignment
- Supplied with dual check valve - Con-Serv DC 057
- 15 Year warranty. Please visit our website for individual finish warranties

Spray Rinse Requirements :

The spray rinse requires a minimum inlet water pressure of 100kPa, and a maximum of 500kPa to completely divert the water flow from the tap to the spray rinse.

Temperature range: Min 1°C. Max 70°C

Working Pressure: Min 1 Bar/15psi. Max 5 Bar/75psi

Packed Weight: 3.29kg

Flow Rates: 1 Bar: 5.3L/min

2 Bar: 9.3L/min

3 Bar: 11.2L/min



AS/NZS 3716
WMKA02818
SAI Global

Perin & Rowe
Tapware