



Color Variants

GW251100

Highlights

Flush installation
Handleless drawer
Bright interior lighting
Push-to-open function.
Hygienic stainless steel interior with glass bottom
Direct temperature selection in the range 30 °C to 80 °C.
Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

Heating methods

Preheating of small beverage containers.
Warming ovenware.
Keeping meals warm.
Low-temperature cooking.
Direct temperature control.
Personalisation function via Home Connect.
16 additional programmes via Home Connect.

Handling

Touch key operation.

Features

Net volume 20 litres.
Volume capacity: Dinner service for 6 people including ø 27 cm plates and a serving dish depending on size.
Capacity load max. 25 kg.
Usable interior dimensions
W 548 mm x H 92 mm x D 410 mm.
Heating system for even heat distribution and stable cavity temperature.
Status display, visible in the glass front.
Glass bottom made of safety glass.

Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.
Remote control and monitoring.
Timing function.

Planning notes

Plan the niche without back wall.
Protrusion from appliance front to furniture cabinet 21 mm.
Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.
Drawers installed above a dishwasher need a specific niche.
The socket can be planned behind the appliance.

Connection

Total connected load 0.82 KW.
Connection cable 1.75 m, detachable.

Characteristics

Built-in / Free-standing

Built-in

Maximum number of plates

Maximum number of espresso cups
64

Dimensions (HxWxD)
140x594x519

Dimensions of the packed product (HxWxD)
210 x 650 x 660

Required niche size for installation (HxWxD)
140 x 560 x 550

Power Level

Type of control setting and signalling devices
Via app

Time control
No

Fuse protection
10

Voltage
220-240

Frequency
50-60

Plug type
Gardy plug w/ earthing

Universal Product Code

Alternative colors available

Length of electrical supply cord (in)
71 "

Required cutout/niche size for installation (in)
x

Appliance Dimensions (h x w x d) (in)

Dimensions of the packed product
8.26 x 25.59 x 25.98

Net weight
42.000

Gross weight
46.000

Length electrical supply cord
175

Required niche size for installation (HxWxD)
140 x 560 x 550

Dimensions (HxWxD)
140x594x519

Dimensions of the packed product (HxWxD)
210 x 650 x 660

Net weight
19.0


Gross weight
20.7

Included accessories

Consumption and connection features

2025-09-09

Page 1

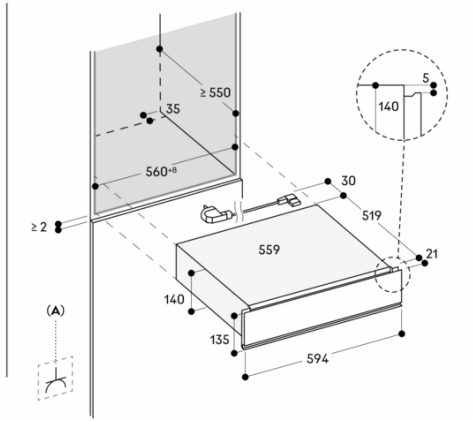

A: Accessible electrical connection
Measurements in mm