



Color Variants

GW252130
GW252100

Included accessories

1 x grid.

Highlights

Flush installation
Handleless drawer
Bright interior lighting
Push-to-open function.
Hygienic stainless steel interior with glass bottom
Direct temperature selection in the range 30 °C to 80 °C.
Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

Heating methods

Preheating of small beverage containers.
Warming ovenware.
Keeping meals warm.
Low-temperature cooking.
Direct temperature control.
Personalisation function via Home Connect.
16 additional programmes via Home Connect.

Handling

Touch key operation.

Features

Net volume 52 litres.
Additional grid creates a second level and extends storage space.
Volume capacity: Dinner service for 12 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.
Capacity load max. 25 kg.
Usable interior dimensions
W 548 mm x H 232 mm x D 410 mm.
Heating system for even heat distribution and stable cavity temperature.
Status display, visible in the glass front.
Glass bottom made of safety glass.

Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.
Remote control and monitoring.
Timing function.

Planning notes

Plan the niche without back wall.
Protrusion from appliance front to furniture cabinet 21 mm.
Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.
Drawers installed above a dishwasher need a specific niche.
The socket can be planned behind the appliance.

Connection

Total connected load 0.82 KW.
Connection cable 1.75 m, detachable.

Characteristics

Color / Material Front
Sterling

Built-in / Free-standing
Built-in

Dimensions (HxWxD)
280x594x519

Dimensions of the packed product (HxWxD)
210 x 650 x 660

Required niche size for installation (HxWxD)
280 x 560 x 550

Maximum number of plates

Maximum number of espresso cups
64

Net weight
24.7

Gross weight
27.1

EAN code
4242006307424


Fuse protection
10

Voltage
220-240

Frequency
50-60

Consumption and connection features

2025-09-24
Page 1

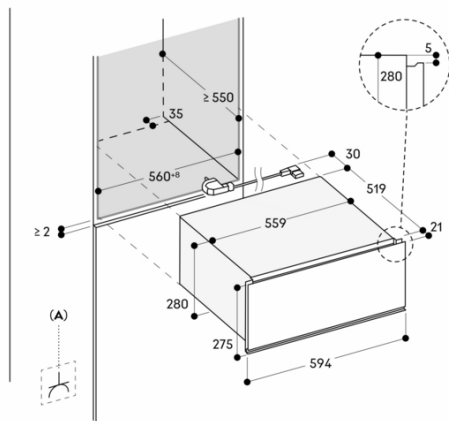

A: Accessible electrical connection
Measurements in mm