



RW204070

RA220010:

Door Lock

RA250220:

Carbon airfilter

RA297600:

SbS Installation kit for RW204

wine climate cabinet 200 series

86 x 60 cm

RW204070

- Seamless, handle-free access that preserves your kitchen's clean lines
- Two independently controllable climate zones from 5° to 20°
- Humidity level can be adjusted to avoid drying out of cork
- Generous storage: 38 bottles with space for 4 magnums, organised for effortless aging and display
- Extendable bottle trays made of oak wood and aluminium

Highlights

Opening assist for door enabling seamless integration without handles

2 independently controllable climate zones

Consistent temperatures with exact control from +5 °C to +20 °C

Humidity control

Extendable bottle trays made of oak wood and aluminium.

Adjustable LED lighting.

Cushioned door closing system allowing a soft and controlled door closure

Capacity 38 bottles (based on 0.75l standard bottles).

Side-by-side installation possible with special accessory

Handling

Opening assist for door.

Electronic temperature control with digital display.

Touch keys.

Presentation light option, dimmable.

Interior LED lighting (3000 K) with automatic dimming with opening and closing of door.

Lockable door (with door lock RA 220 010).

Technical Features

Dynamic cold air distribution.

Automatic defrosting with defrost water evaporation.

Constant air purification by activated charcoal air filter in each climate zone.

UV protection (UV transmission: 19 %).

Rest mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction alarm.

Features

5 bottle trays, 4 of which are extendable.

Storage of Magnum bottles possible (up to 4 Magnum bottles).

LED lighting.

Total volume 101 litres.

Consumption data

Noise level 34 dB (A) re 1 pW.

Planning notes

Flat hinge.

Door hinge right, reversible.

Height-adjustable feet.

Door opening angle of 115°, fixable at 90°.

Max. door panel frame weight 10 kg.

For integration next to a side wall a clearance of


7 mm/238 mm hinge side is necessary for door panel thickness of 19 mm without handle and a door opening angle of 90°/115°.

No transport/operation above 1.500 m sea level.

Connection


Total connected load 0.130 KW.

Connecting cable 2.2 m with plug.

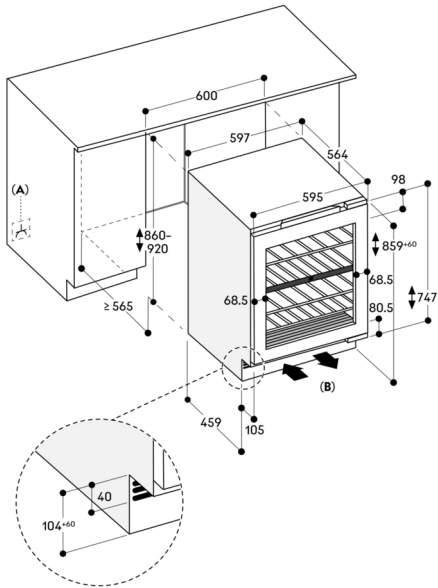


A: Electrical connection
B: Min. 150 mm²
The height of the plinth can be reduced to 50 mm
Measurements in mm

Bottle storage

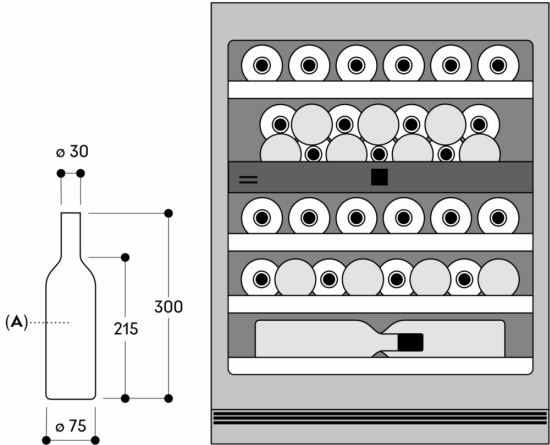

A: 0.75 litres
Measurements in mm

Door panel frame

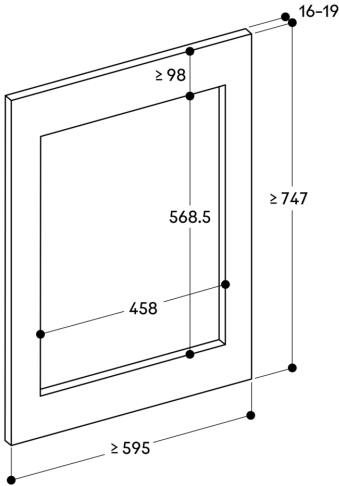

Measurements in mm