

AR413122

AA413111:

Active charcoal filter for AR413122

AA010410:

ventilation grid 90 cm

## Remote fan unit 400 series

### AR413122

- Powerful remote fan unit to combine with motorless appliances
  - Efficient BLDC technology
  - Compact and space-saving installation in a 10 cm high plinth
  - Air output according to EN 61591 Extr rate recircul int. max: 900 m3/h
  - Sound power level depends on the built-in situation.
  - Powerful remote fan unit to combine with motorless appliances
- Efficient BLDC technology  
Compact and space-saving installation in a 10 cm high plinth

#### Output

Air output according to EN 61591 Extr rate recircul int. max: 900 m3/h  
Sound power level depends on the built-in situation.

#### Features


Filter is suitable for the preparation of fish and seafood due to special treatment.  
3 electronically controlled power levels and one intensive mode.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Steel housing, zinc-plated.  
Pipe connection pieces on intake side: 1 x DN 150 round.  
Retaining bracket for installation on the ceiling or side of a cupboard enclosed.  
2 activated charcoal filters enclosed ex factory.

#### Planning notes

Connection to the respective appliances via network cable.  
Installation in the plinth with cut-out for the air ducting in the furniture base.  
Filter replacement interval: 1-1.5 years depending on cooking frequency.  
It must be possible to remove the plinth to replace the filter. Recommended minimum gap between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.

#### Connection

Total connected load 180 W.  
Connecting cable 1.8 m, pluggable.  
Network cable 2 m.

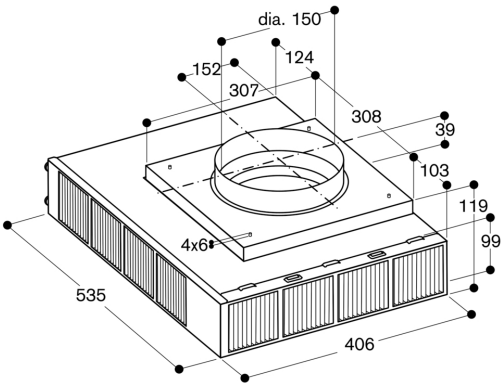

View from above

